

Staubblende PZ 20/T

Dust stop PZ 20/T

nr./no. 561253

Axialluftdüse PZ 20/A AF1

Air purge PZ 20/A AF1

nr./no. 561176

Befestigungsschelle PZ 20/L AF2

Clamping collar PZ 20/L AF2

nr./no. 561541

Kühlarmatur geschlossen PA 20/M AF1

Cooling jacket closed PA 20/M AF1

nr./no. 1027765

Zwischenrohr PZ 20/C

Intermediate tube PZ 20/C

nr./no. 561174

Quarz-Scheibenvorsatz PA 20/I

Quartz window PA 20/I

nr./no. 1008144

Pyrometer

Schlauchtülle G1/8"

für Schlauch mit lichter Weite 8 bis 9 mm

Hose nozzle G1/8"


for hose with inner width 8 to 9 mm

Halterung PB 08/K AF2

Clamping device PB 08/K AF2

nr./no. 1016808

* Nicht mit Tele-Optik:
PA 20.06 oder PZ 20.06
*Not with tele-optics:
PA20.06 or PZ 20.06*

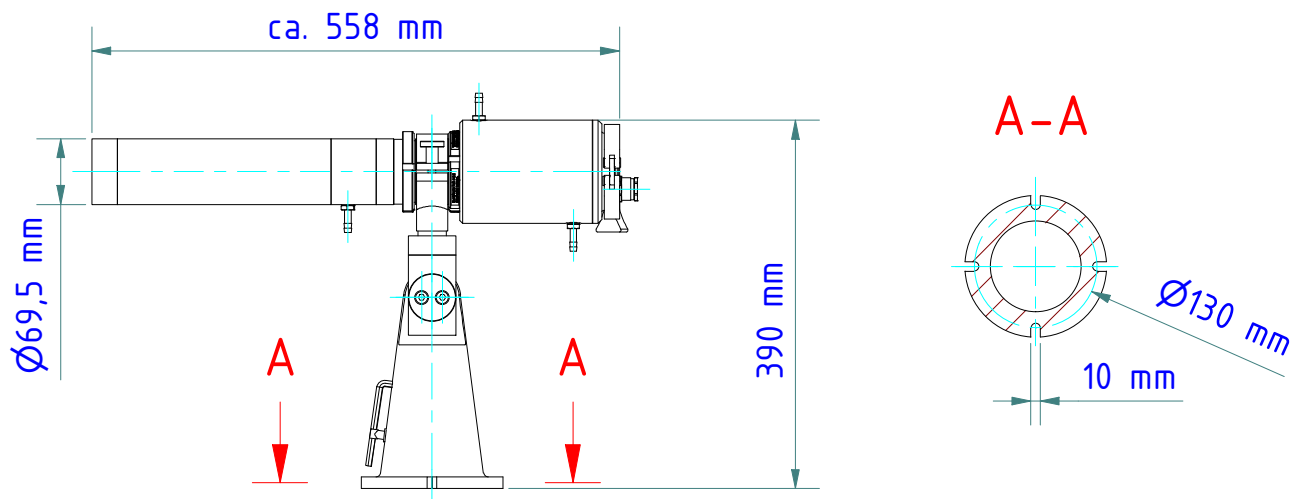

Gewicht: 7.670 Kg

Weight: 7.670 Kg

Seite 1 von 1

Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi