

Kugelflansch PB 08/I AF1
Ball flange PB 08/I AF1
 nr./no. 508167

Kniehebeladapter PZ 40/G
toggle adapter PZ 40/G
 nr./no. 561867



Kühlarmatur, geschlossen PA 20/M AF3
Cooling jacket, sealed PA 20/M AF3
 nr./no. 1048200

Anbaufansch PZ 20/F
Flange PZ 20/F
 nr./no. 561172

Siemens-Adapter PZ 20/V
Siemens adapter PZ 20/V
 nr./no. 561263



★ Bei Verwendung mit Teleoptik (PA 20.06)
 muss 1 Zwischenrohr verwendet werden!
*When using a telephoto lens (PA 20.06), you
 must use 1 intermediate tube.*

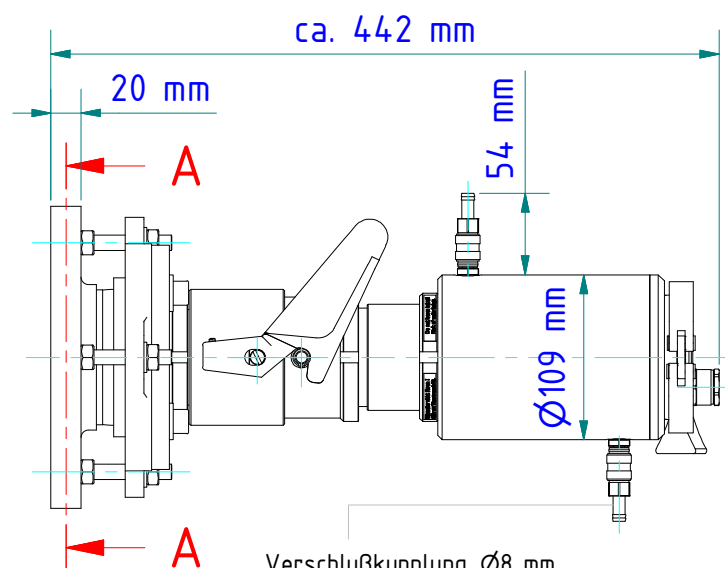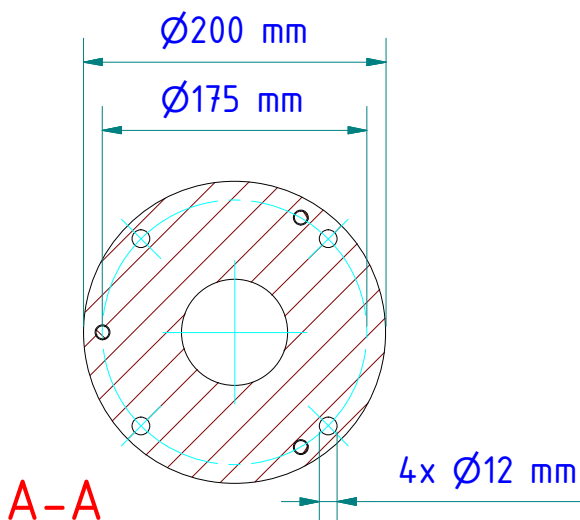


Verschlusskupplung Ø8 mm
 für Schlauch mit lichter Weite 8 bis 9 mm
*locking coupling Ø8 mm
 for hose with inner width 8 to 9 mm*

Seite 1 von 1
 Page 1 of 1

Gewicht: 7.620 Kg
 Weight: 7.620 Kg



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi