

Anbauflansch PZ 20/F

Flange PZ 20/F
nr./no. 561172

Axialluftdüse PZ 20/A AF1
Air purge PZ 20/A AF1
nr./no. 561176


Kühlarmatur, geschlossen PA 20/M AF2
Cooling jacket, sealed PA 20/M AF2
nr./no. 1032672

Quarzscheibenscharnier PZ 20/I AF1
Quartz window with hinge PZ 20/I AF1
nr./no. 561173


Pyrometer



★ Bei Verwendung mit Teleoptik (PA 20.06)
muss 1 Zwischenrohr verwendet werden!
When using a telephoto lens (PA 20.06), you
must use 1 intermediate tube.

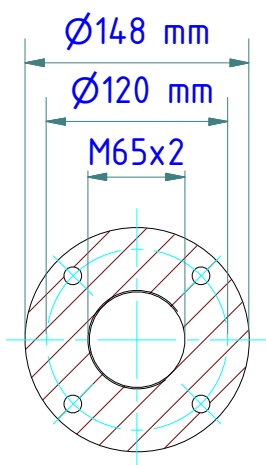

A-A

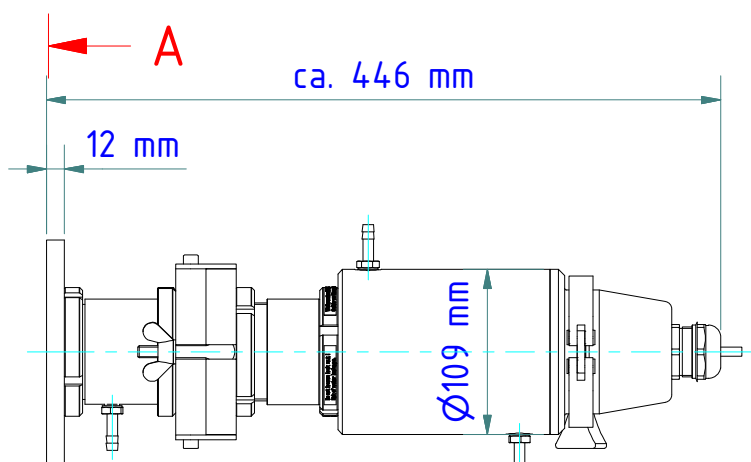

Schlauchtülle G1/8"
für Schlauch mit lichter Weite 8 bis 9 mm
Hose nozzle G1/8"
for hose with inner width 8 to 9 mm

Gewicht: 6.130 Kg
Weight: 6.130 Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi