


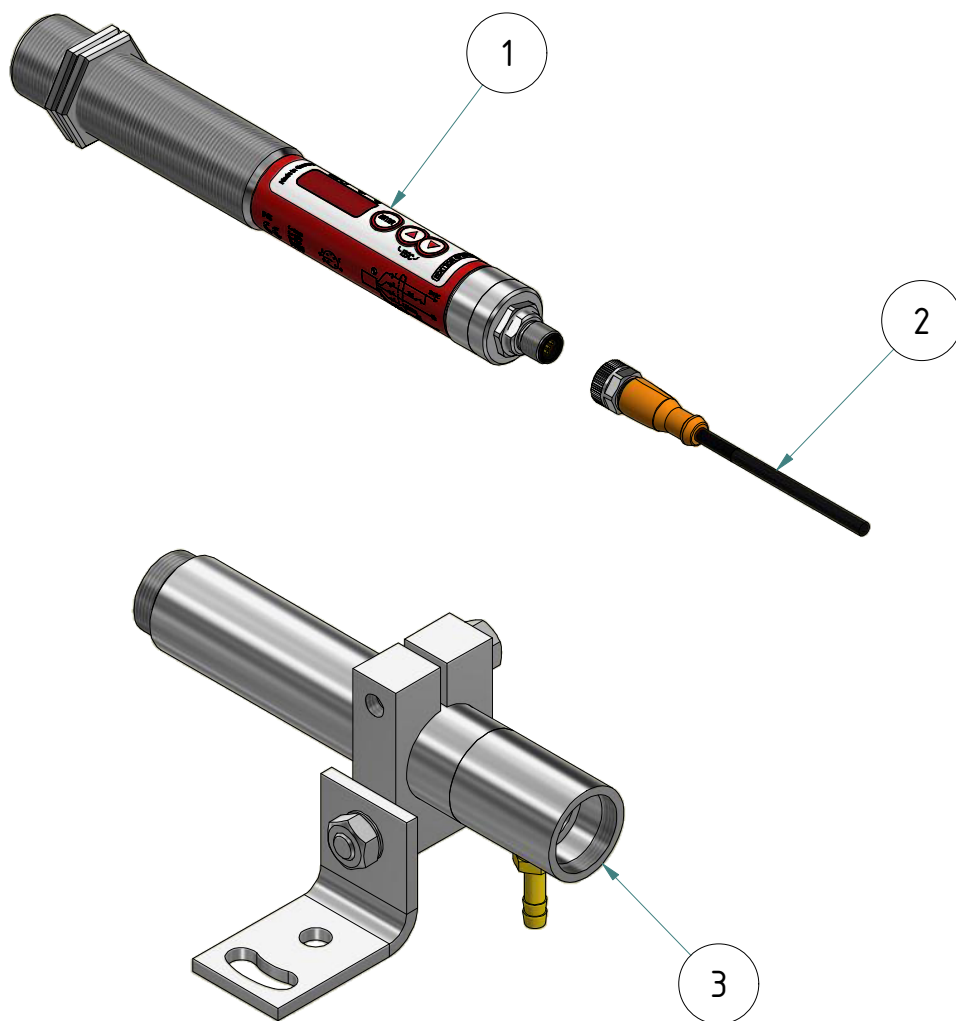


Stückliste / Parts list

Pos.	Artikel-Nr.: <i>order number</i>	Bezeichnung <i>title</i>
1	1083372	Pyrometer CellaTemp PKL 28 AF 2/10 <i>Pyrometer CellaTemp PK 28 AF 2/10</i>
2	1043813	Kabel VK 02/L AF 1 <i>Cable VK 02/L AF 1</i>
3	1064571	Montagekombination PK 01-007 <i>Mounting PK 01-007</i>


Gewicht: 1.810 Kg
Weight: 1.810 Kg

Seite 1 von 1
Page 1 of 1

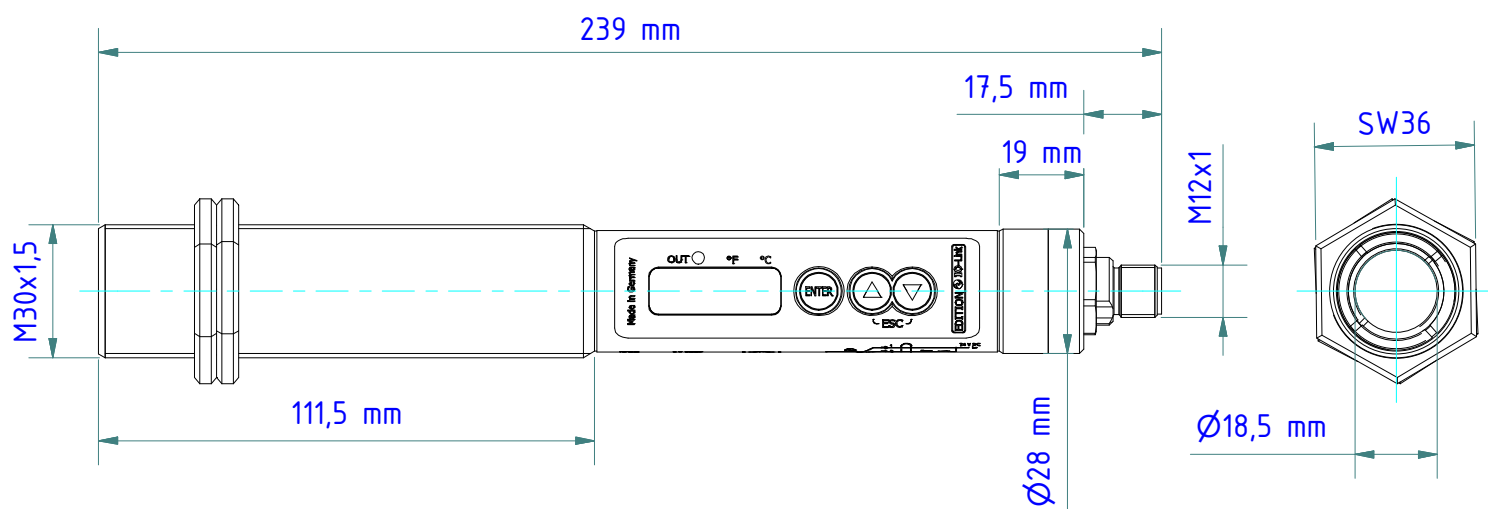

Gewicht: 0.460 Kg
Weight: 0.460 Kg


Seite 1 von 2
Page 1 of 2

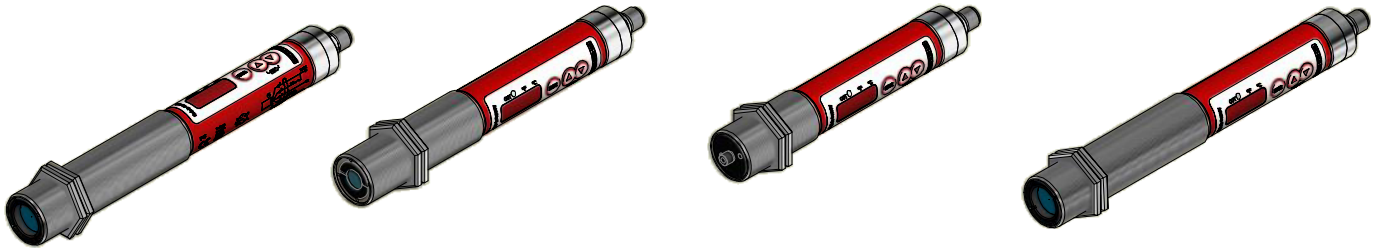

VK 02/L AF1 (5m)
nr./no.: 1043813




VK 02/L AF2 (10m)
nr./no.: 1048085



VK 02/L AF3 (25m)
nr./no.: 1082724





VK 02/R AF1 (5m)
nr./no.: 1069551




VK 03/A AF1 (5m)
nr./no.: 1086480



VK 03/A AF2 (10m)
nr./no.: 1086481




VK 03/R AF3 (20m)
nr./no.: 1086483

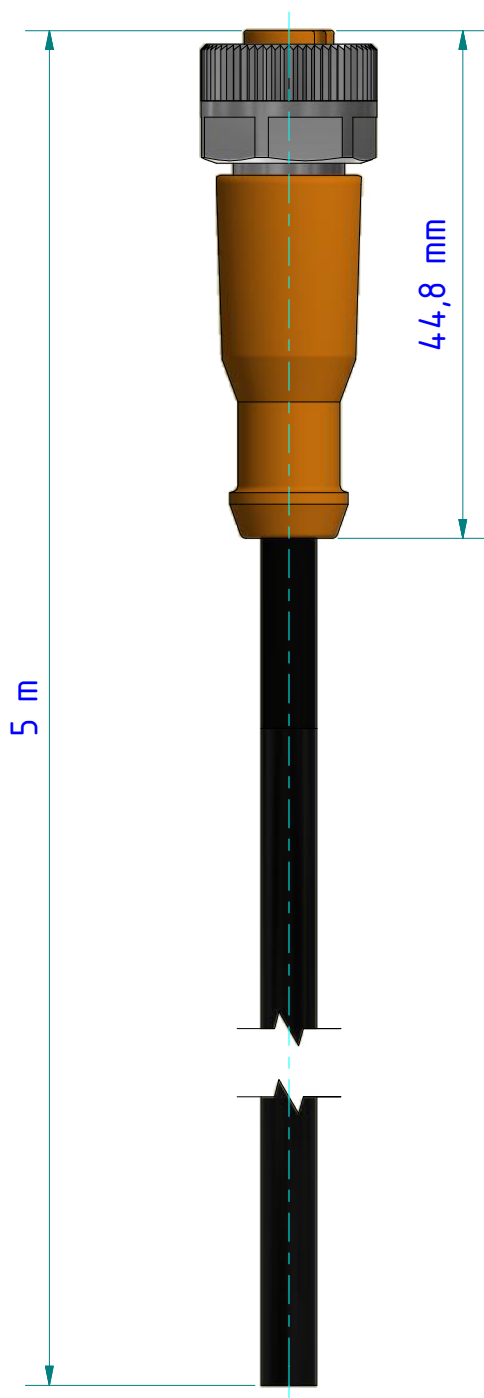

Belegung Configuration	Pol contacts
---------------------------	-----------------

braun	an 1
brown	at 1
weiß	an 2
white	at 2
blau	an 3
blue	at 3
schwarz	an 4
black	at 4
grau	an 5
grey	at 5
Schirm durchgängig an Verschraubung	
Shield constantly at screw connection	

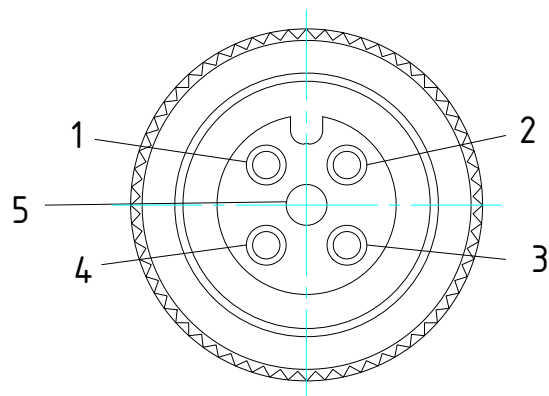

(Maßstab 3:1)

PUR-Kabel / PUR cable

Umgebungstemperatur [°C] / Ambient temperature -25...90, cULus: max. 75 °C


Schutzart / Protection IP 65 / IP 67

Gewicht: 0.220 Kg
Weight: 0.220 Kg

Seite 1 von 1
Page 1 of 1

This technical drawing illustrates a mechanical assembly. A horizontal shaft is shown passing through a vertical bracket. The bracket is mounted on a base plate. A nut and washer are used to secure the bracket to the base plate. The base plate features a circular hole and a semi-circular cutout. Two leader lines point to the shaft and the base plate.


A technical drawing of a mechanical assembly. It shows a shaft with a hexagonal section and a threaded end, connected to a bracket. The shaft is labeled with 'Ø 10' and 'L 100'. The bracket is labeled with 'M 10' and 'L 100'. The drawing is a perspective view showing the shaft passing through the bracket. The shaft has a hexagonal section in the middle and a threaded end on the right. The bracket has a square base and a vertical plate. The shaft is shown in a dark grey color, and the bracket is shown in a light grey color. The drawing is a technical illustration of a mechanical part.

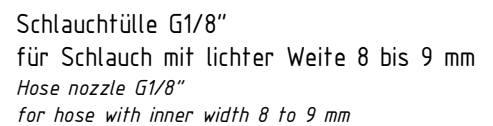

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi