




| Stückliste / <i>Parts list</i> |                                     |                                                                         |
|--------------------------------|-------------------------------------|-------------------------------------------------------------------------|
| Pos.                           | Artikel-Nr.:<br><i>order number</i> | Bezeichnung<br><i>title</i>                                             |
| 1                              | 1097863                             | Pyrometer CellaTemp PX 47 AF 1<br><i>Pyrometer CellaTemp PX 47 AF 1</i> |
| 2                              | 1090728                             | Montagekombination PA 15-007<br><i>Mounting PA 15-007</i>               |


Gewicht: 7.020 Kg  
 Weight: 7.020 Kg

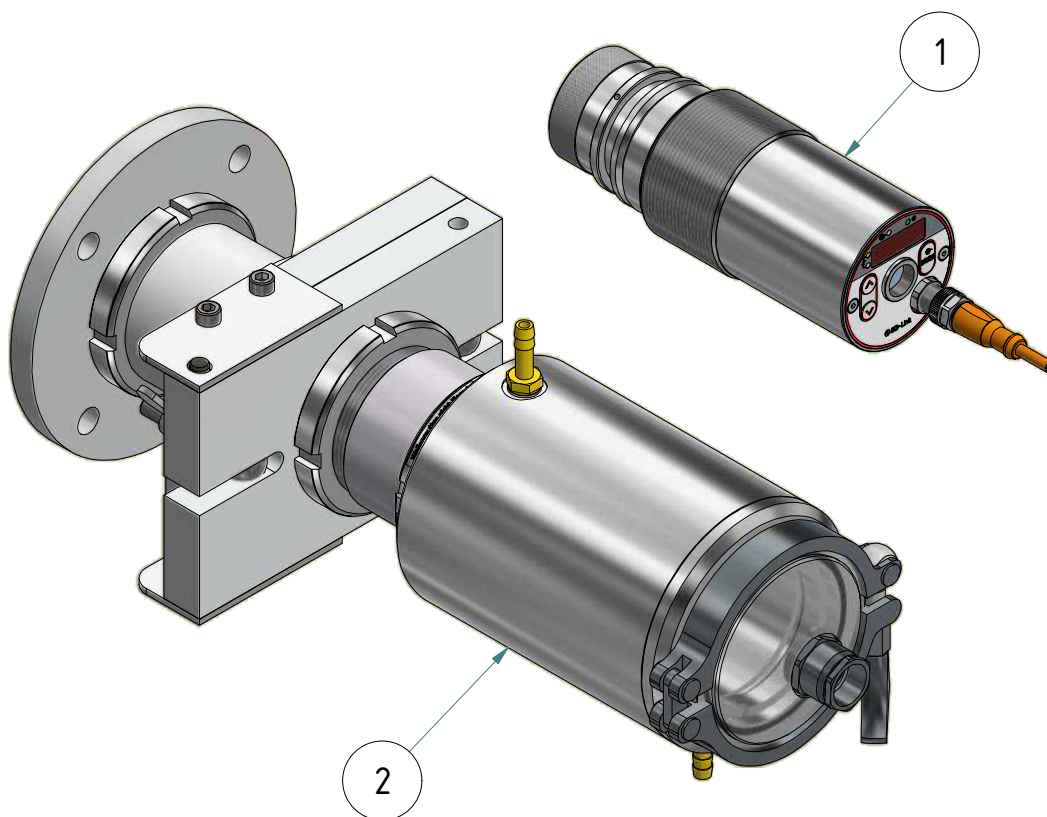

## Optik

### Le n s

|                                                              | min.<br>[mm] | max.<br>[mm] |
|--------------------------------------------------------------|--------------|--------------|
| Standard Optik PZ 10.01<br><i>Standard lens PZ 10.01</i>     | 35,0         | 44,4         |
| Nah Optik PZ 10.05<br><i>close-up lens PZ 10.05</i>          | 35,0         | 44,4         |
| Standard Optik PZ 15.03<br><i>Standard lens PZ 15.03</i>     | 51,5         | 65,0         |
| Standard Optik PZ 20.01<br><i>Standard lens PZ 20.01</i>     | 49,8         | 69,9         |
| Nah Optik PZ 20.03<br><i>Close-up lens</i>                   | 49,7         | 67,9         |
| Panorama Optik PZ 40.03<br><i>Panorama Optik PZ 40.03</i>    | 52,1         | 67,9         |
| Weitwinkel Optik PZ 20.05<br><i>Wide-angle lens PZ 20.05</i> | 62,8         | 64,7         |
| Tele Optik PZ 20.06<br><i>Telephoto lens PZ 20.06</i>        | 93,0         | 112,0        |
| Spezial Optik PZ 20.08<br><i>Special lens PZ 20.08</i>       | 35,0         | 44,4         |

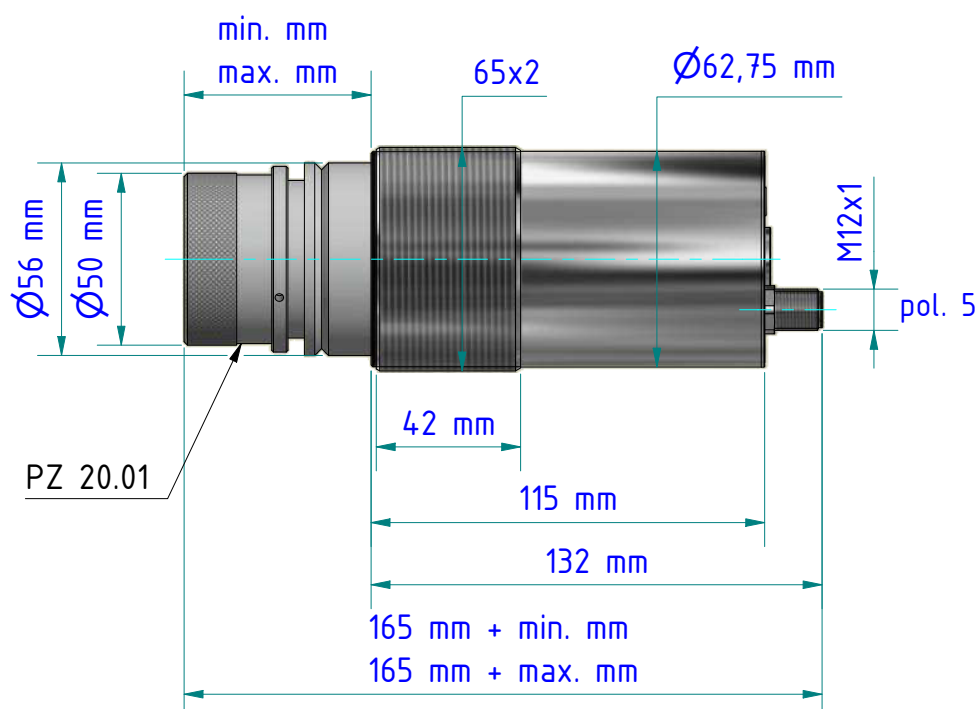


Anbaufansch PZ 20/F  
*Flange PZ 20/F*  
 nr./no. 561172



Axialluftdüse PZ 20/A AF1  
*Air purge PZ 20/A AF1*  
 nr./no. 561176

Saphir-Scheibenscharnier PZ 15/I AF2  
*Sapphire window with hinge PZ 15/I AF2*  
 nr./no. 1066857

Kühlarmatur, geschlossen PA 20/M AF1  
*Cooling jacket, sealed PA 20/M AF1*  
 nr./no. 1027765

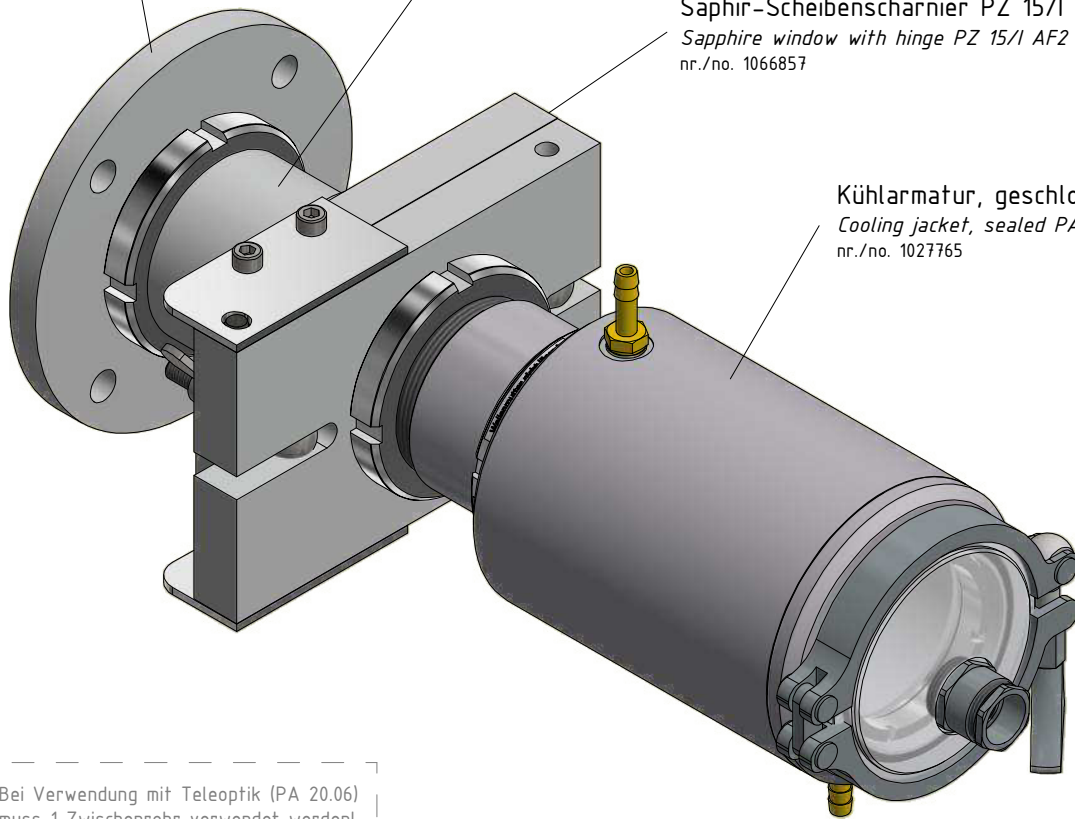

★ Bei Verwendung mit Teleoptik (PA 20.06) muss 1 Zwischenrohr verwendet werden!  
*When using a telephoto lens (PA 20.06), you must use 1 intermediate tube.*

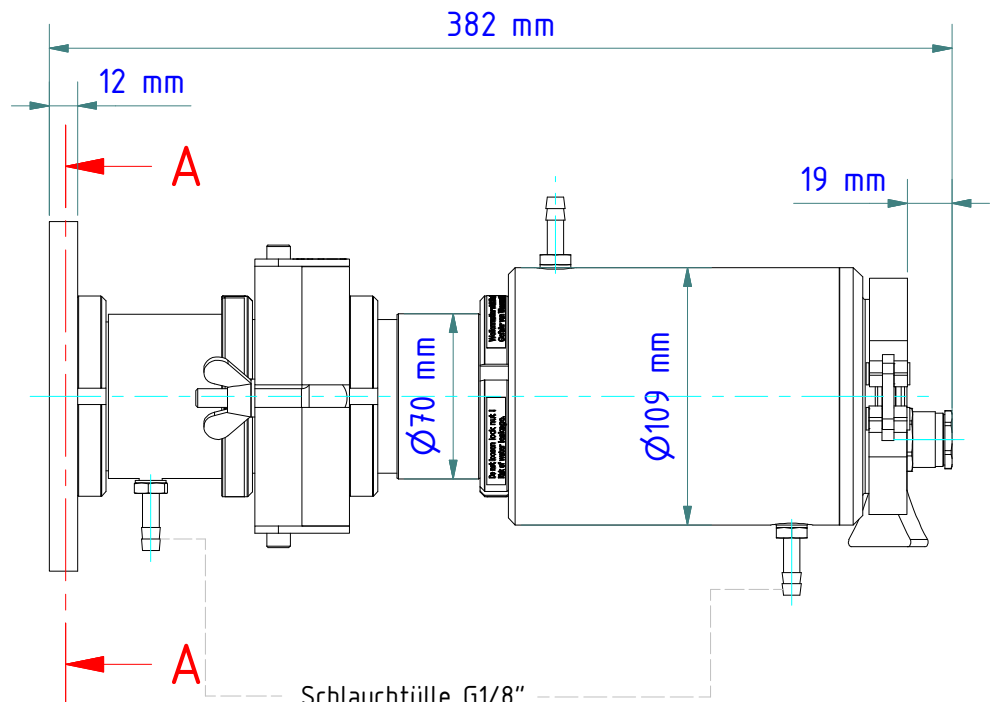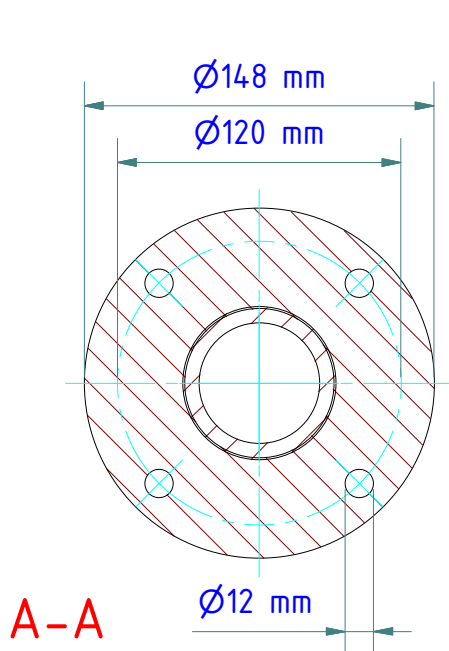


Schlauchtülle G1/8"  
 für Schlauch mit lichter Weite 8 bis 9 mm  
*Hose nozzle G1/8"*  
 for hose with inner width 8 to 9 mm

Seite 1 von 1  
 Page 1 of 1

Gewicht: 5.980 Kg  
 Weight: 5.980 Kg



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH  
Infrared Temperature Solutions (ITS)  
Carl-Keller-Straße 2-10  
49479 Ibbenbüren-Laggenbeck  
Germany

[www.keller.de/its](http://www.keller.de/its)  
Tel. +49 (0) 5451 850  
Fax +49 (0) 5451 85412  
[its@keller.de](mailto:its@keller.de)

## Distributor



INOR Transmitter Oy  
Unikkotie 13  
FI-01300 Vantaa  
Puhelin +358 10 4217900  
Faksi +358 10 4217901  
[myynti@inor.fi](mailto:myynti@inor.fi)