
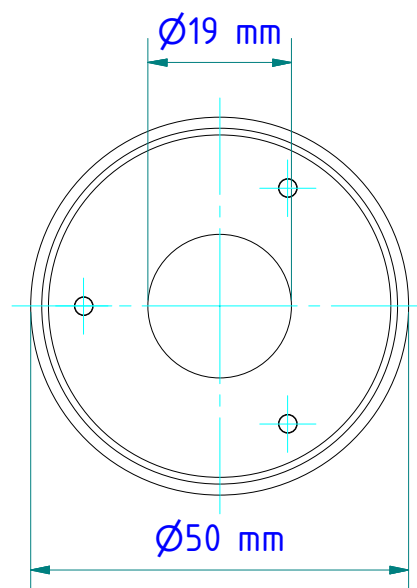
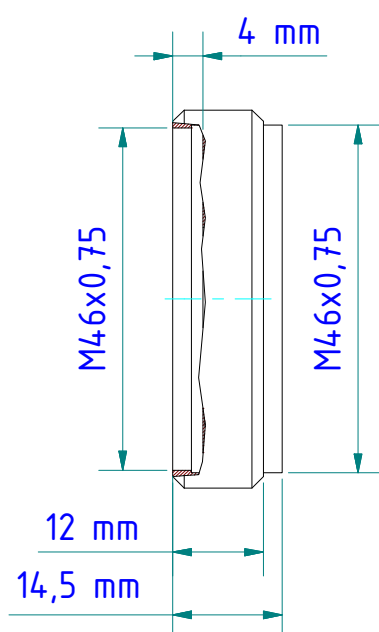


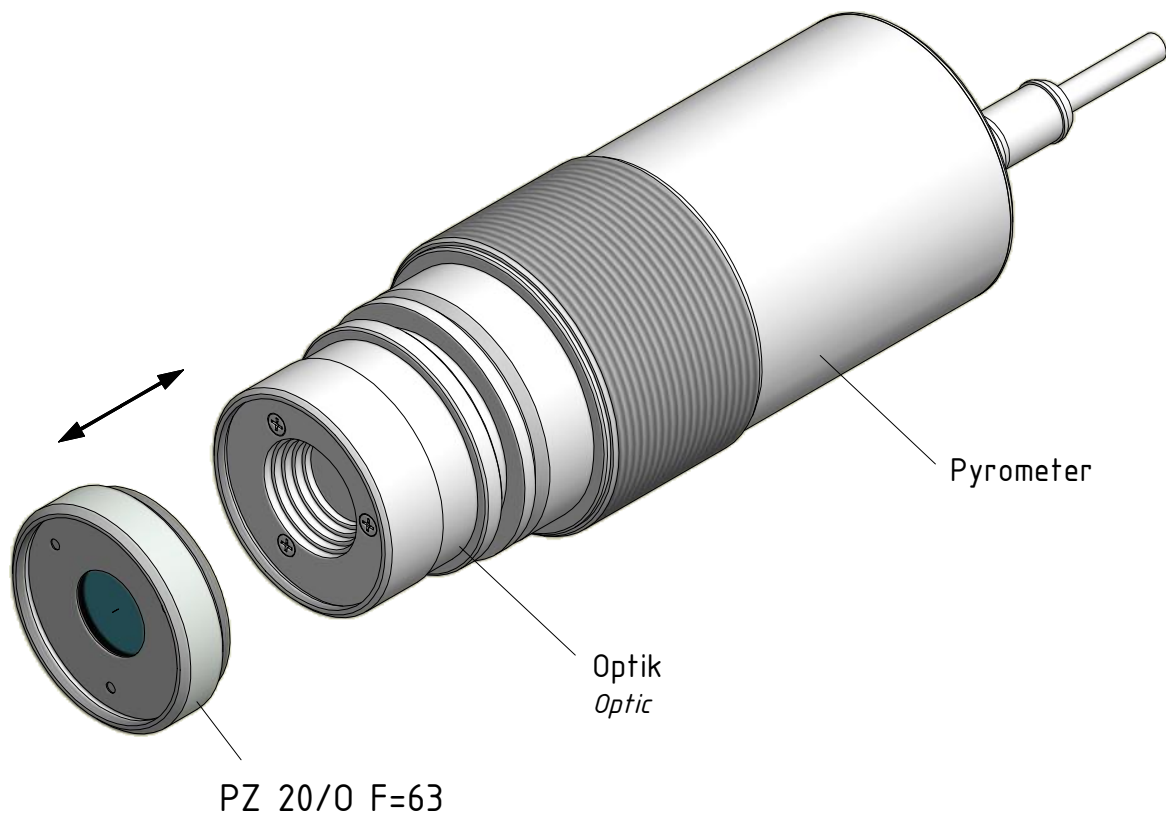

Gewicht: 0.060 Kg
 Weight: 0.060 Kg
 Werkstoff: 3.2315
 Material: 3.2315

Seite 1 von 2
 Page 1 of 2

Elektronik <i>Elektronic</i>	Optik <i>Lens</i>	Vorsatzlinse PZ 20/0-63 <i>Supplementary lens PZ 20/0-50</i>	
			
		Messabstand <i>Measuring distance</i> (mm)	Messfleck <i>Measuring spot</i> Ø in mm
PA 29 AF 2x	Standard-Optik (75mm) PZ 20.01	45 - 63	1,05 - 1,75
PA 2x, 3x PA 4x (750-2400 °C) (850-3000 °C)	Standard-Optik (75mm) PZ 20.01	45 - 54	0,40 - 0,60
	Nah-Optik (63mm) PZ 20.03	38 - 45	0,35 - 0,50
PA 4x (650-1700 °C)	Standard-Optik (75mm) PZ 20.01	45 - 54	0,80 - 1,10
	Nah-Optik (63mm) PZ 20.03	38 - 45	0,70 - 1,0

PA 43 (650-1700 °C)	Standard-Optik (75mm) PZ 20.01	45 - 54	h	1,4 - 2
			v	0,3 - 0,4
	Nah-Optik (63mm) PZ 20.03	38 - 45	h	1,3 - 1,7
			v	0,3
PA 43 (750-2400 °C) (850-3000°C)	Standard-Optik (75mm) PZ 20.01	45 - 54	h	1,3 - 1,8
			v	0,2 - 0,3
	Nah-Optik (63mm) PZ 20.03	38 - 45	h	1,1 - 1,5
			v	0,2 - 0,3

h = horizontal / v = vertikal

h = horizontal / v = vertical

Seite 2 von 2

Page 2 of 2



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi