


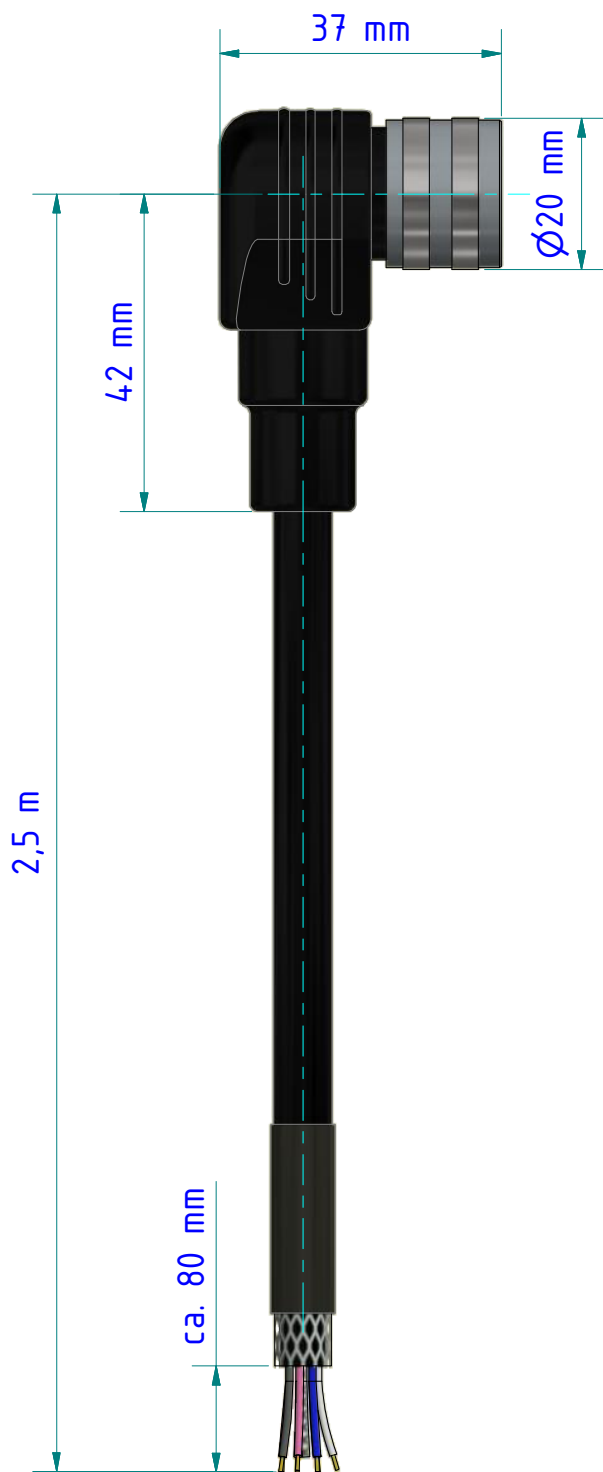


Anschlussquerschnitt 0,25mm² (AWG 24)
 Schutzart IP67 geschirmt
 Obere Grenztemperatur + 70°C
 Untere Grenztemperatur - 25°C

Wire gauge 0,25mm² (AWG 24)
 Degree of protection IP67 shielded
 Upper temperature + 70°C
 Lower temperature - 25°C

Gewicht: 0.230 Kg
 Weight: 0.230 Kg

Belegung Configuration	Pol contacts
rosa pink	an A at A
weiß white	an B at B
grau grey	an C at C
gelb yellow	an D at D
violett violet	an E at E
braun brown	an F at F
grün green	an G at G
rot-blau red-blue	an H at H
rot red	an J at J
grau-rosa grey-pink	an K at K
blau blue	an L at L
schwarz black	an M at M

Schirm durchgängig an Verschraubung
 Shield constantly at screw connection

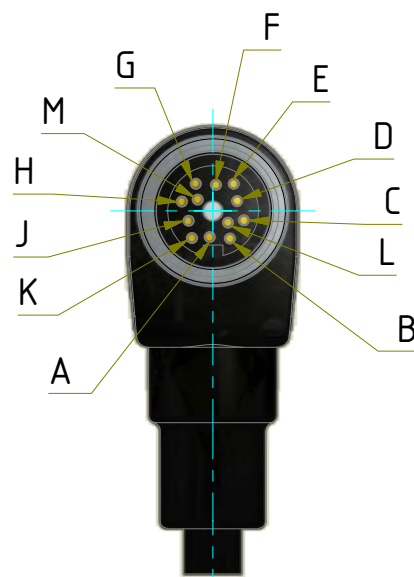

Seite 1 von 1
 Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi