




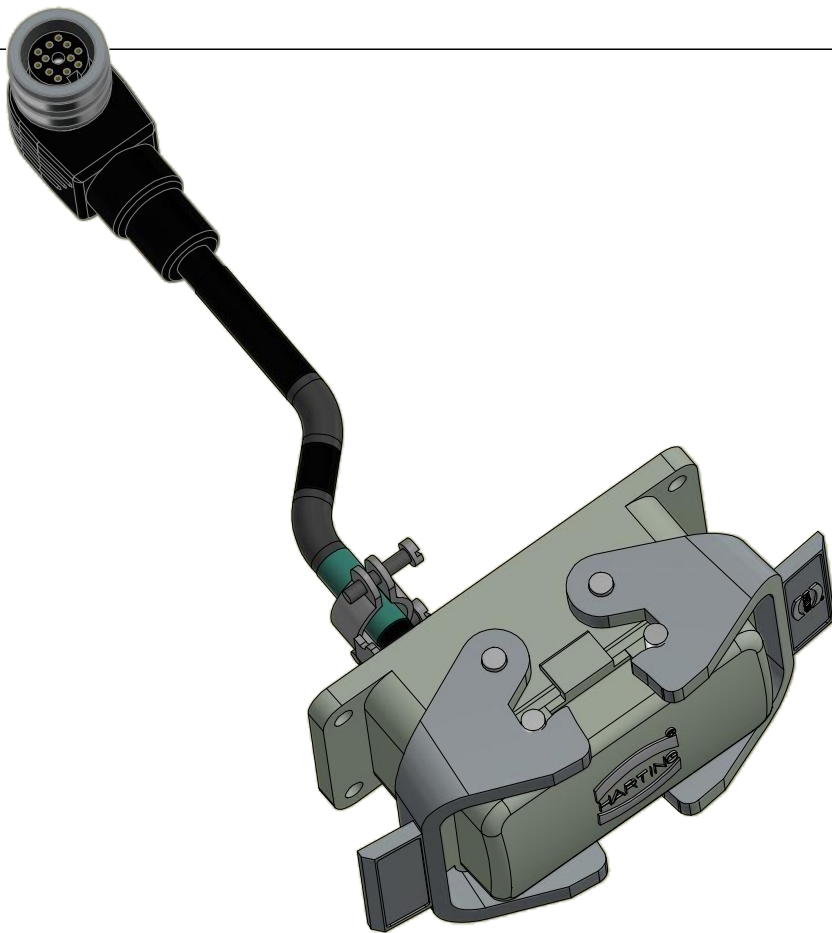


Belegung <i>Configuration</i>	Funktion <i>function</i>
1 an blau <i>1 at blue</i>	0V
2 an rot <i>2 at red</i>	+24V
3 an weiß+brown <i>3 at white+brown</i>	GND Schnittst.
4 an grau/rosa <i>4 at grey/pink</i>	Ready
5 an grau <i>5 at grey</i>	RxD (A)
6 an rosa <i>6 at pink</i>	RxD (B)
7 an grün <i>7 at green</i>	TxD (A)
8 an gelb <i>8 at yellow</i>	TxD (B)
9 an - <i>9 at -</i>	-
10 an - <i>10 at -</i>	-

Schirm durchgängig an Verschraubung
Shield constantly at screw connection

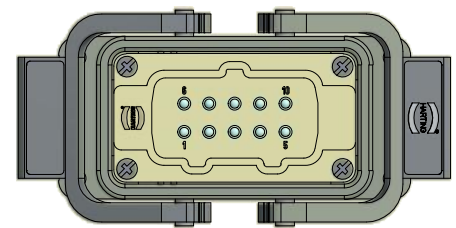

incl. Befestigungsschrauben
inclusive fixing bolts

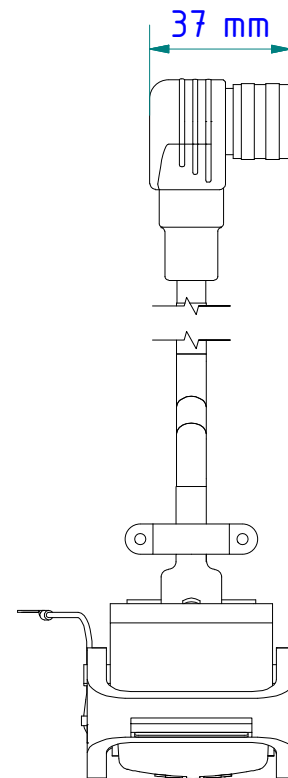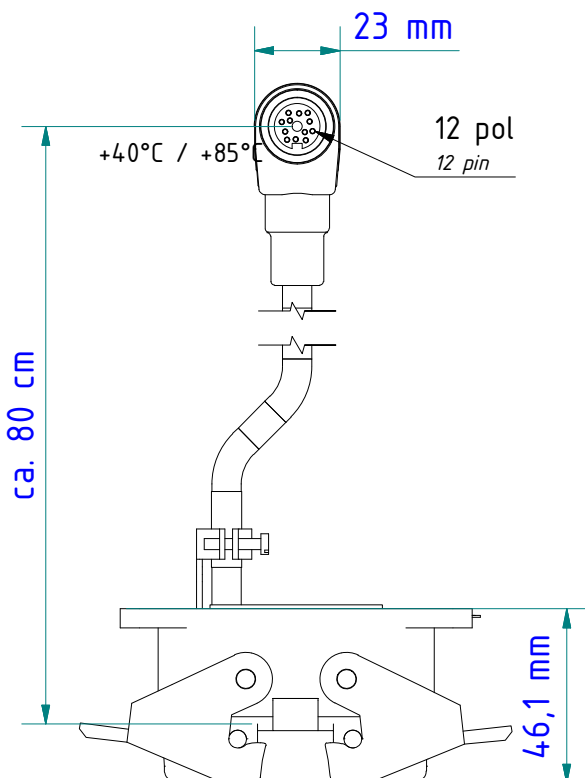



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi