


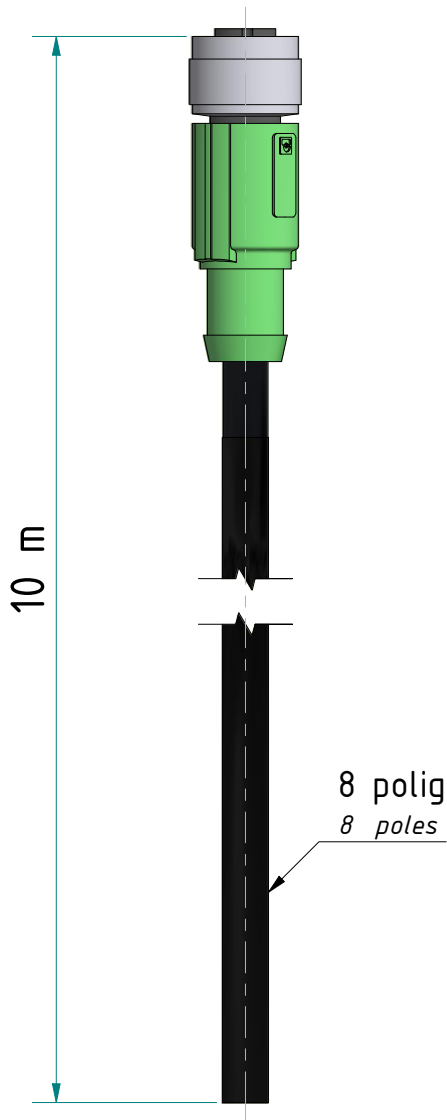

Anschlussquerschnitt $0,25\text{mm}^2$ (AWG 24)
 Schutzart IP67 geschirmt
 Obere Grenztemperatur $+ 80^\circ\text{C}$
 Untere Grenztemperatur $- 25^\circ\text{C}$


Wire gauge $0,25\text{mm}^2$ (AWG 24)
 Degree of protection IP67 shielded
 Upper temperature $+ 80^\circ\text{C}$
 Lower temperature $- 25^\circ\text{C}$

Gewicht: 0.550 Kg
 Weight: 0.550 Kg

Belegung Configuration	Pol contacts
---------------------------	-----------------

weiß white	an 1 at 1
braun brown	an 2 at 2
grün green	an 3 at 3
gelb yellow	an 4 at 4
grau grey	an 5 at 5
rosa pink	an 6 at 6
blau blue	an 7 at 7
rot red	an 8 at 8


Schirm durchgängig an Verschraubung
 Shield constantly at screw connection

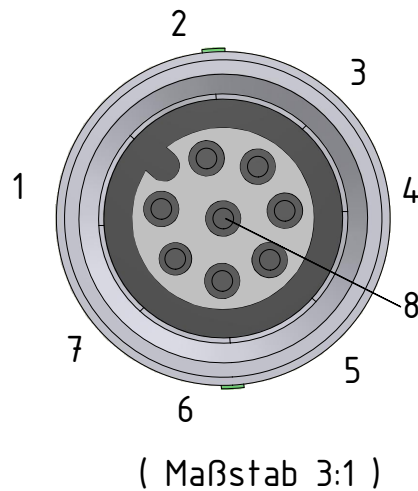

Seite 1 von 1
 Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi