

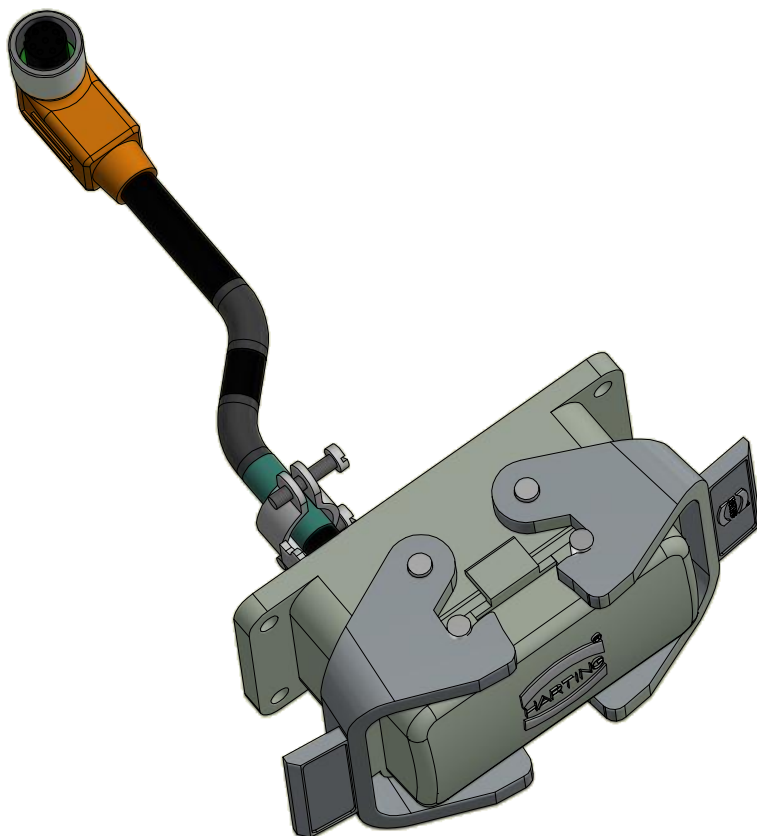
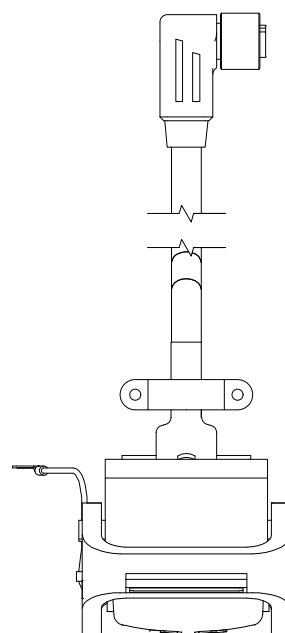


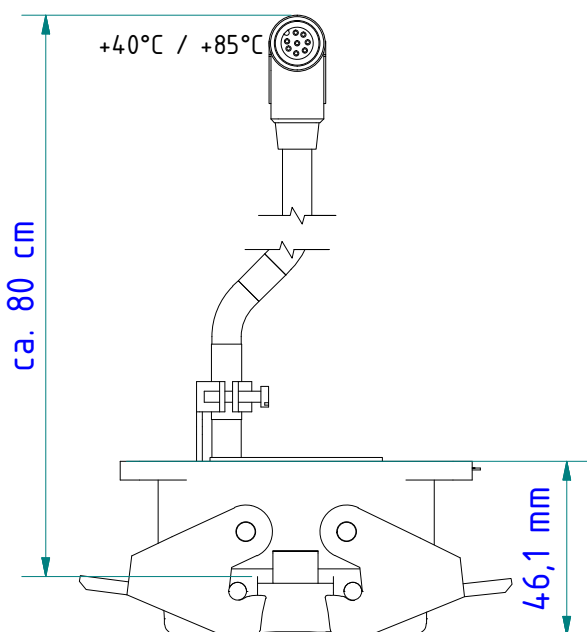

incl. Befestigungsschrauben
inclusive fixing bolts

Belegung (Configuration)	Funktion (function)
1	+24 V DC (+24 V DC)
2	Schalt- ein-/ausgang 1 (Digital in-/output 1)
3	Stromausgang 2 (Analogue output 1)
4	Stromausgang 1 (Analogue output 1)
5	Ser. Schnittstelle RS485 (A) (Serial interface RS485 (A))
6	Ser. Schnittstelle RS485 (B) (Serial Interface RS485 (B))
7	Schalt- ein-/ausgang 2 (Digital in-/output 2)
8	GND (GND)
9	-
10	-

Schirm durchgängig an Verschraubung
Shield constantly at screw connection

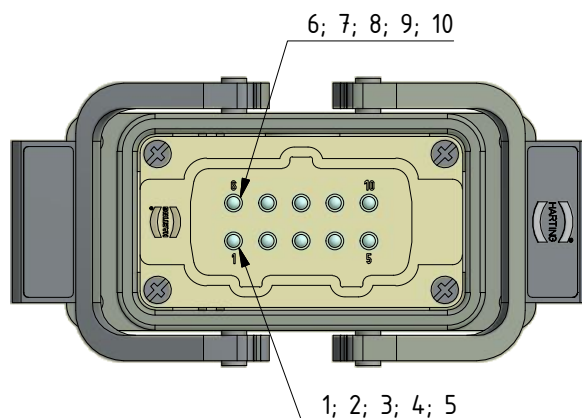

Gewicht: 0.310 Kg
Weight: 0.310 Kg

Seite 1 von 1
page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi