



310



538


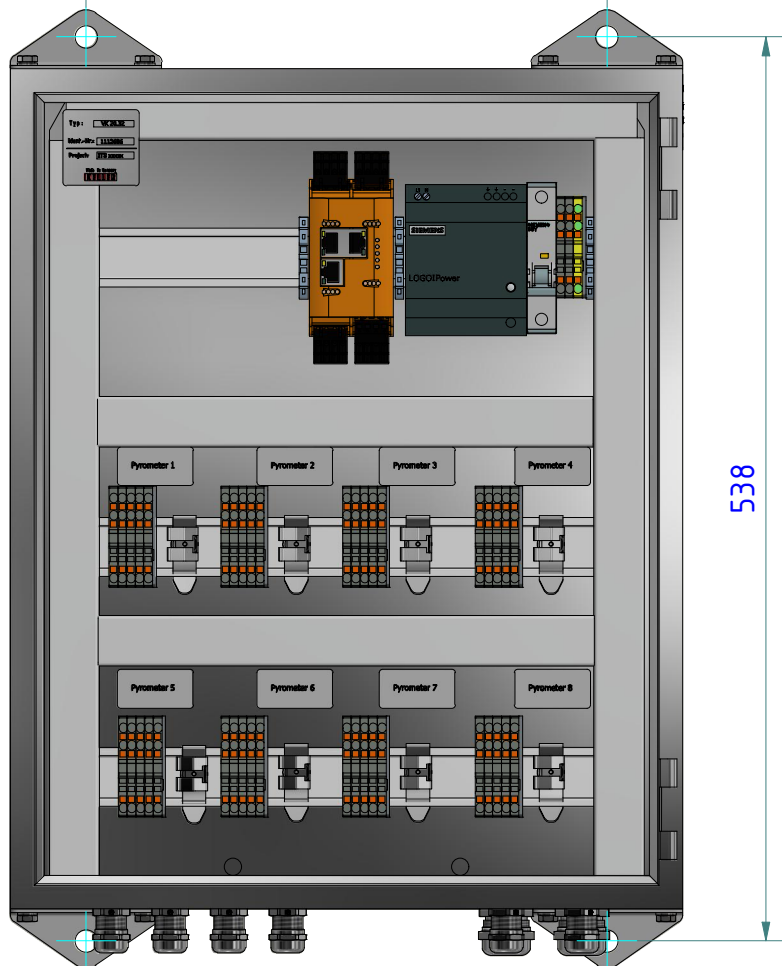


210 mm

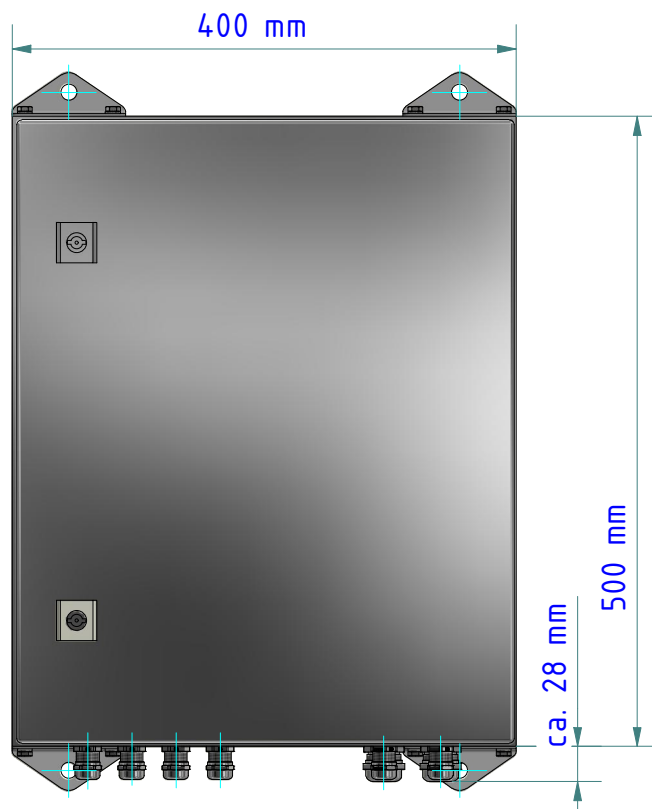

400 mm

ca. 28 mm
500 mm

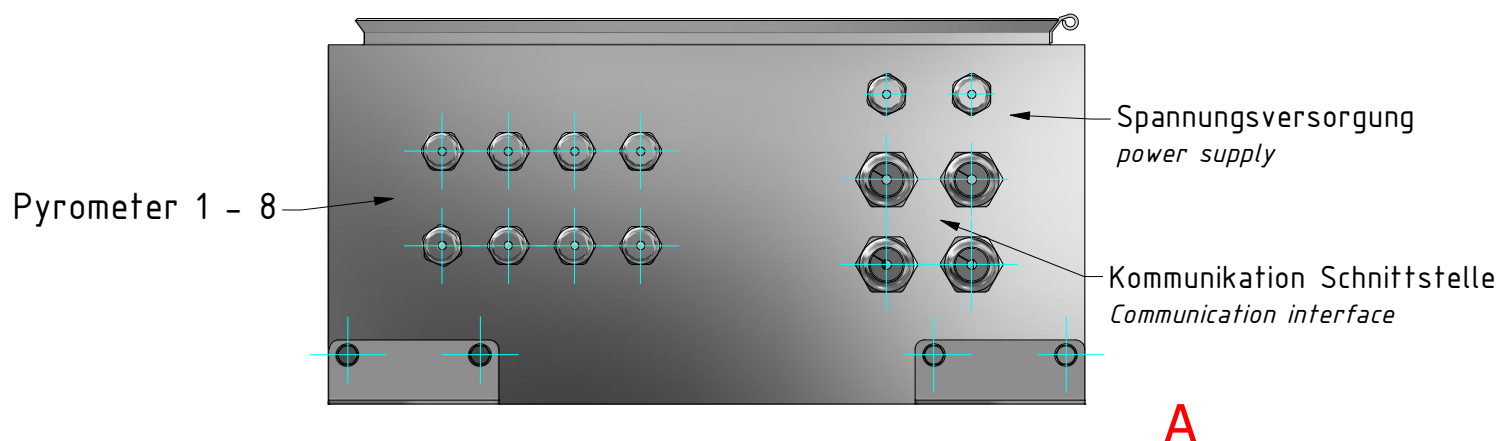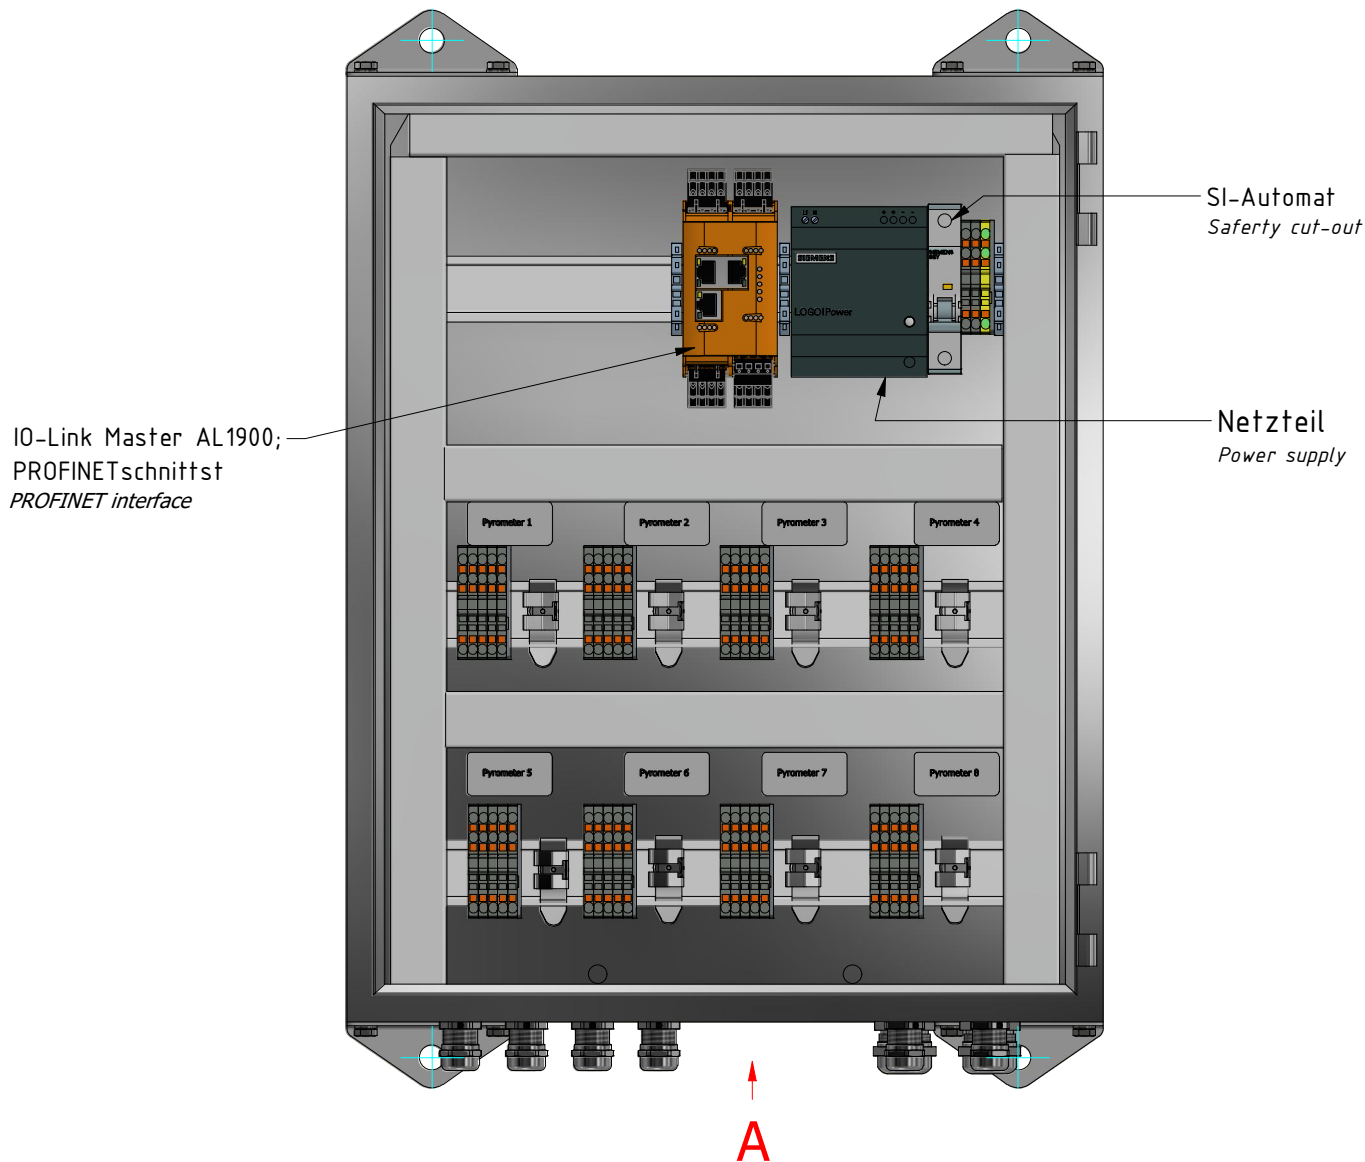


max. 8 Pyrometer
Kommunikationsschnittstelle: Profinet; IO-Link
Für Sensorkabel 4-adrig geschirmt.

max. 8 Pyrometers
Communication interface: Profinet; IO-Link
For sensor cable 4core shielded.



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi