


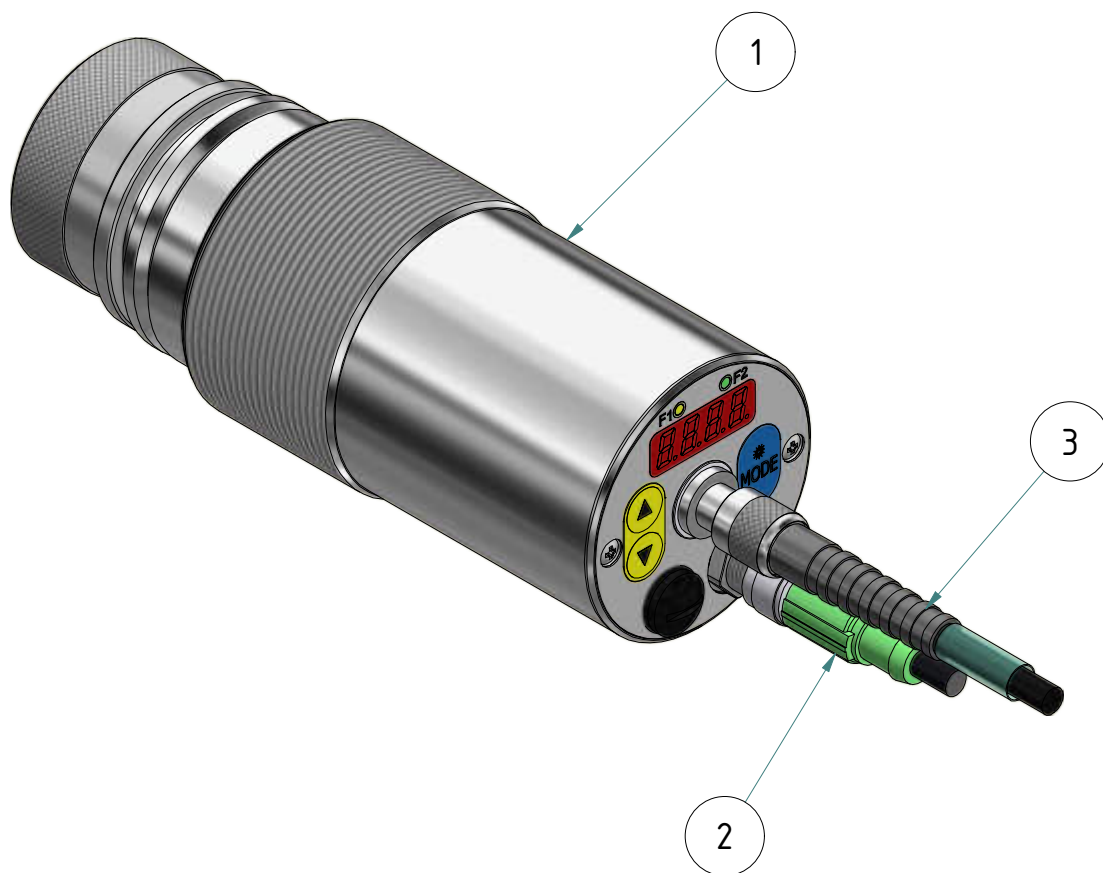


jedoch ohne
 - USB Kabel VK 11/D 1009677
 - Anschlusskabel VK 02/A AF1 1013909

but without
 - USB cable VK 11 / D 1009677
 - Connection cable VK 02/A AF1 1013909


Stückliste / Parts list		
Pos.	Artikel-Nr.: order number	Bezeichnung title
1	1105848	Pyrometer CellaTemp PA 44 AF 7/C Pyrometer CellaTemp PA 44 AF 7/C
2	1121801	Kabel VK 02/A AF 12 Cable VK 02/A AF 12
3	1060020	Kabel VK 02/F AF 2 Cable VK 02/F AF 2


Gewicht: 2.100 Kg
 Weight: 2.100 Kg

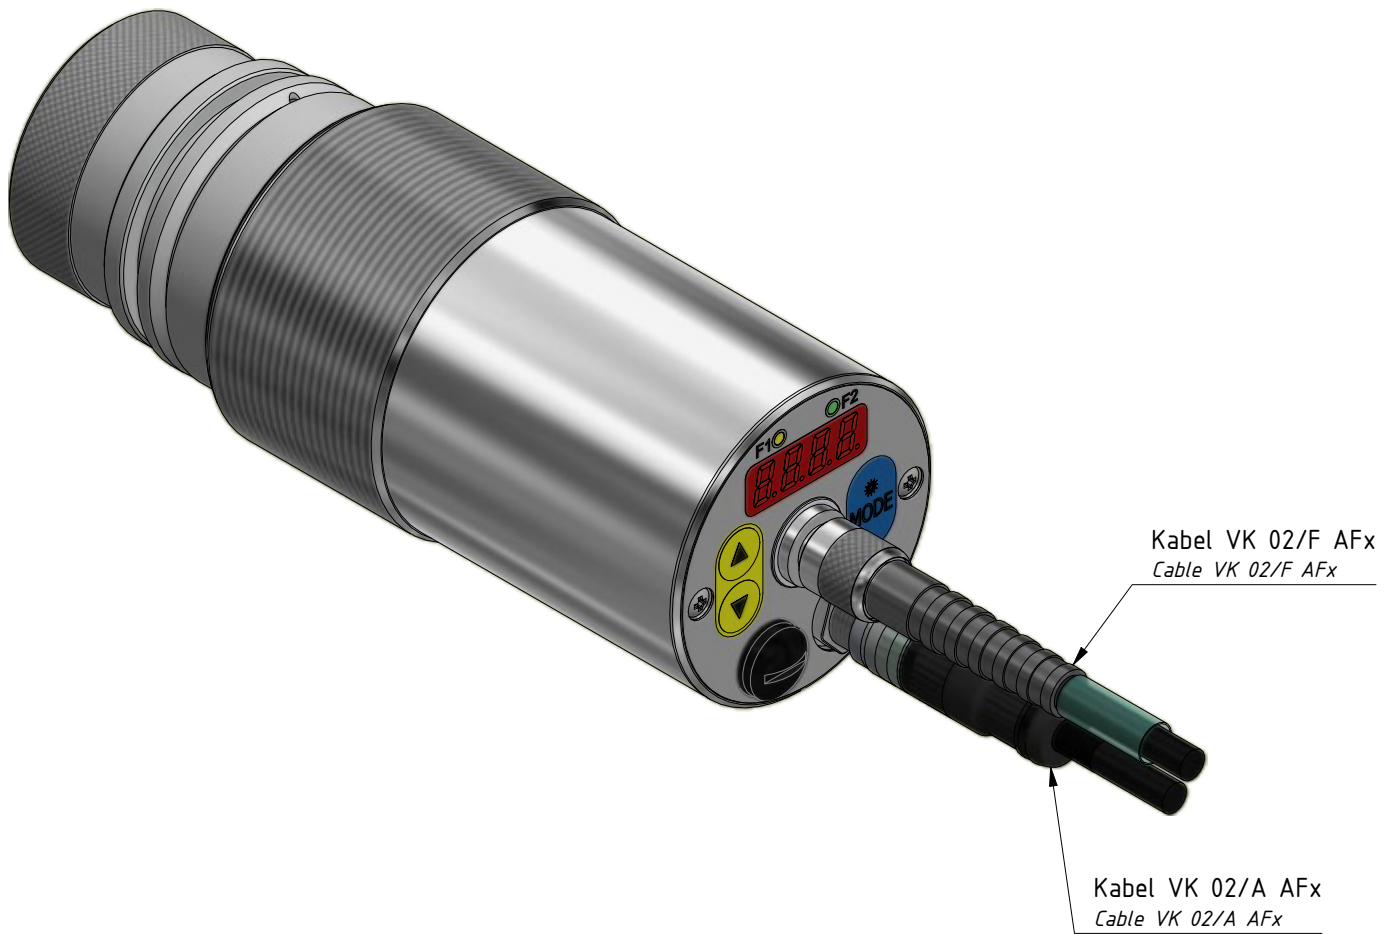

Optik

Lens	min. [mm]	max. [mm]
Standard Optik PZ 10.01 Standard lens PZ 10.01	35,0	44,4
Nah Optik PZ 10.05 close-up lens PZ 10.05	35,0	44,4
Standard Optik PZ 15.03 Standard lens PZ 15.03	51,5	65,0
Standard Optik PZ 20.01 Standard lens PZ 20.01	49,8	69,9
Nah Optik PZ 20.03 Close-up lens	49,7	67,9
Panorama Optik PZ 40.03 Panorama Optik PZ 40.03	52,1	67,9
Weitwinkel Optik PZ 20.05 Wide-angle lens PZ 20.05	62,8	64,7
Tele Optik PZ 20.06 Telephoto lens PZ 20.06	93,0	112,0
Spezial Optik PZ 20.08 Special lens PZ 20.08	35,0	44,4

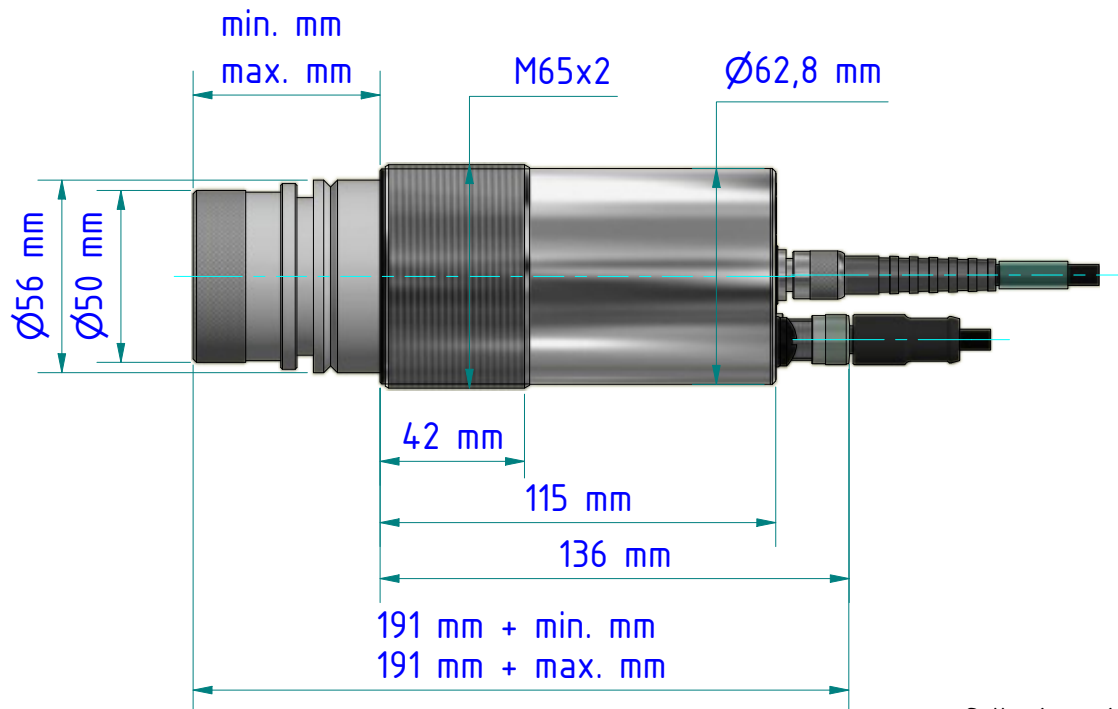

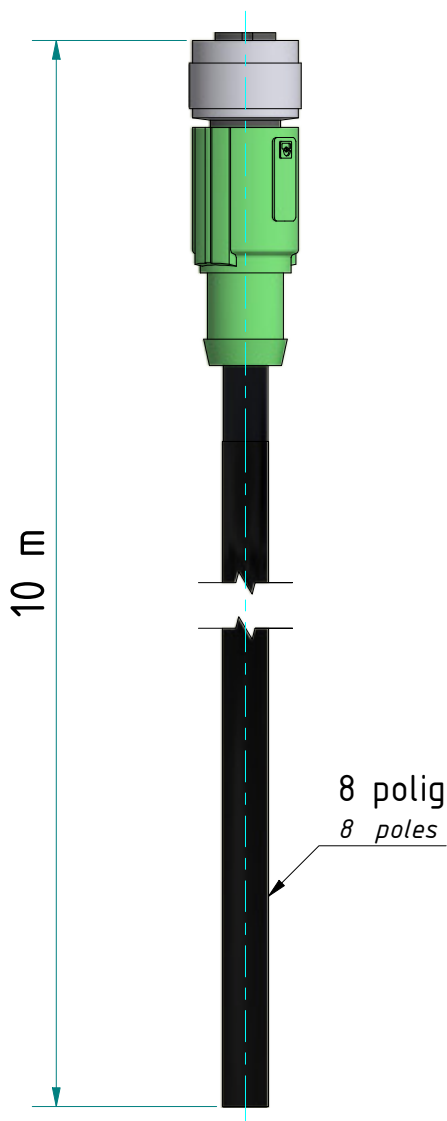

Anschlussquerschnitt $0,25\text{mm}^2$ (AWG 24)
 Schutzart IP67 geschirmt
 Obere Grenztemperatur $+ 80^\circ\text{C}$
 Untere Grenztemperatur $- 25^\circ\text{C}$


Wire gauge $0,25\text{mm}^2$ (AWG 24)
 Degree of protection IP67 shielded
 Upper temperature $+ 80^\circ\text{C}$
 Lower temperature $- 25^\circ\text{C}$

Gewicht: 0.550 Kg
 Weight: 0.550 Kg


Belegung Configuration	Pol contacts
---------------------------	-----------------

weiß white	an 1 at 1
braun brown	an 2 at 2
grün green	an 3 at 3
gelb yellow	an 4 at 4
grau grey	an 5 at 5
rosa pink	an 6 at 6
blau blue	an 7 at 7
rot red	an 8 at 8

Schirm durchgängig an Verschraubung
 Shield constantly at screw connection

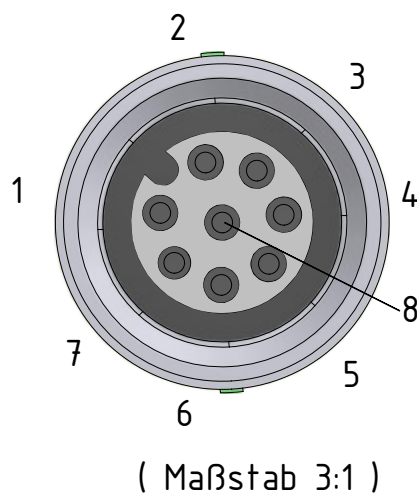

Seite 1 von 1
 Page 1 of 1

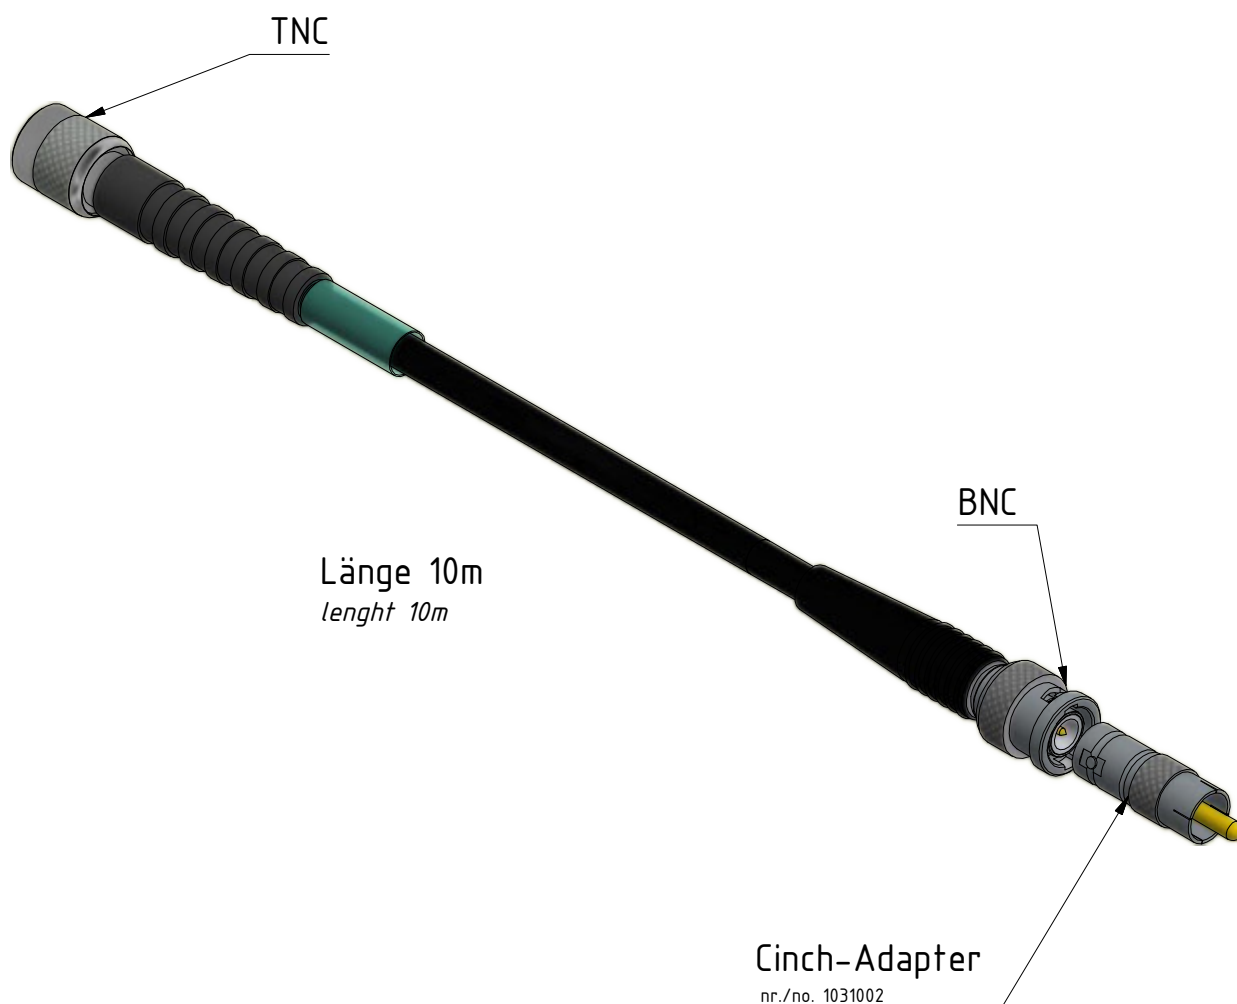


Gewicht: 0.560 Kg
Weight: 0.560 Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi