

Staubblende PZ 10/T  
Dust stop PZ 10/T  
nr./no. 561257

Zwischenrohr PZ 20/C  
Intermediate tube PZ 20/C  
nr./no. 561174

Befestigungsschelle PZ 20/L AF2  
Clamping collar PZ 20/L AF2  
nr./no. 561541



Kühlarmatur PZ 20/B AF5  
Cooling jacket PZ 20/B AF5  
nr./no. 561708

Axialluftdüse PZ 20/A AF1  
Air purge PZ 20/A AF1  
nr./no. 561176

PZ Profibus  
Pyrometer

\* PZ 20/J  
nur bei Verwendung der Teleoptik einsetzen  
\* PZ 20/J  
only to use by using the teleoptics

Halterung PB 08/K AF2  
Clamping device PB 08/K AF2  
nr./no. 1016808

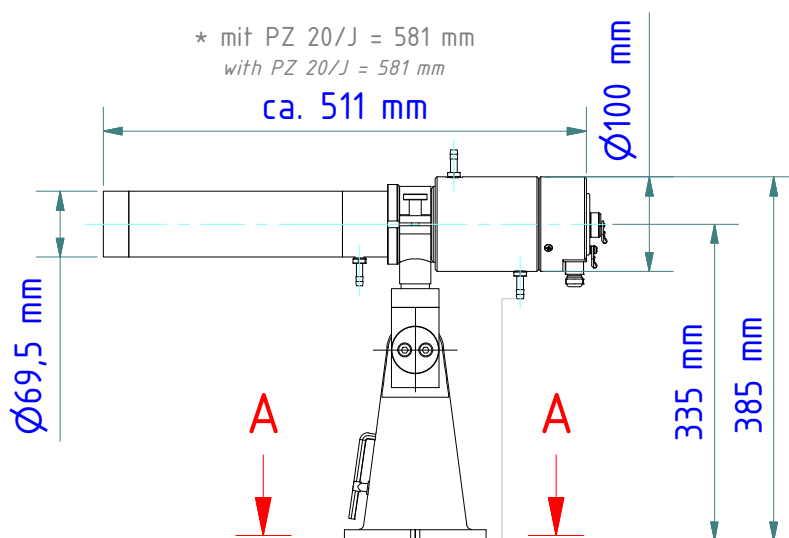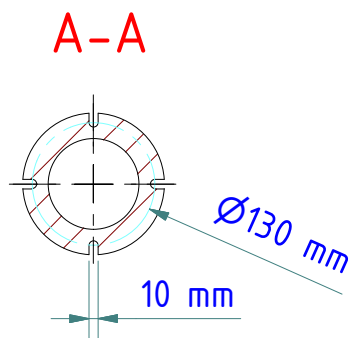

Schlauchtülle G1/8"  
für Schlauch mit lichter Weite 8 bis 9 mm  
Hose nozzle G1/8"  
for hose with inner width 8 to 9 mm

Gewicht: 6.900 Kg  
Weight: 6.900 Kg

Seite 1 von 1  
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH  
Infrared Temperature Solutions (ITS)  
Carl-Keller-Straße 2-10  
49479 Ibbenbüren-Laggenbeck  
Germany

[www.keller.de/its](http://www.keller.de/its)  
Tel. +49 (0) 5451 850  
Fax +49 (0) 5451 85412  
[its@keller.de](mailto:its@keller.de)

## Distributor



INOR Transmitter Oy  
Unikkotie 13  
FI-01300 Vantaa  
Puhelin +358 10 4217900  
Faksi +358 10 4217901  
[myynti@inor.fi](mailto:myynti@inor.fi)