


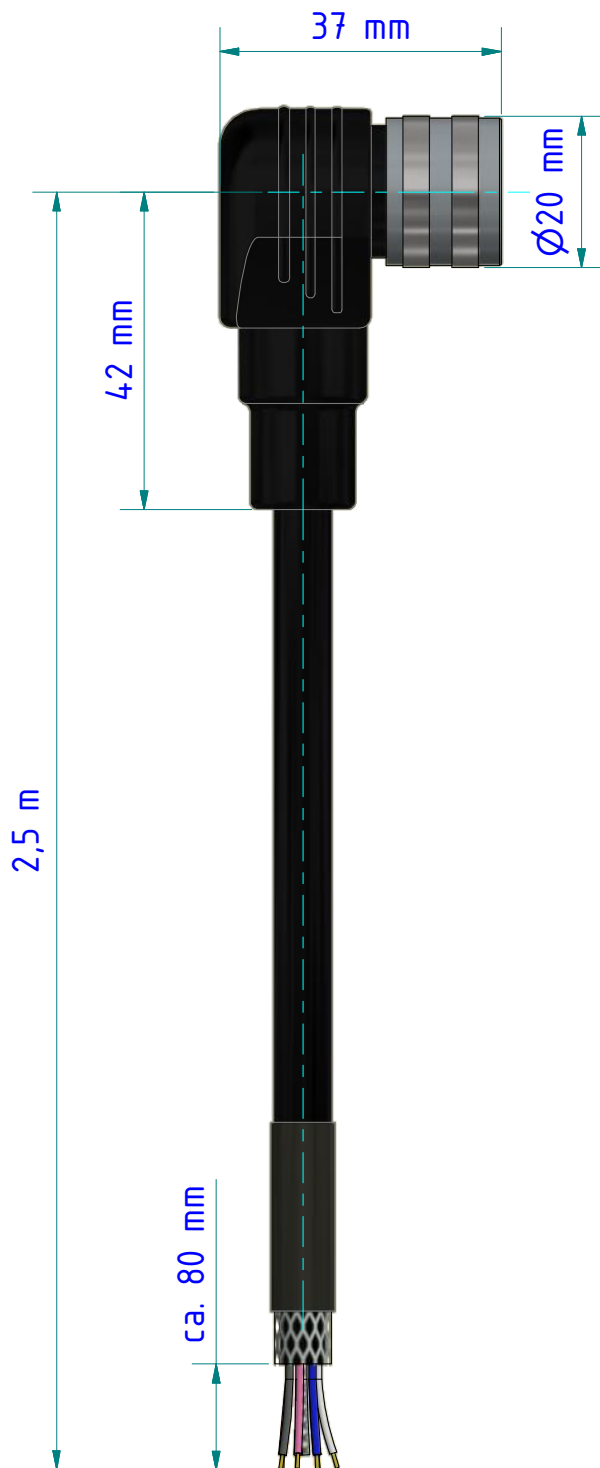

Anschlussquerschnitt 0,25mm² (AWG 24)
 Schutzart IP67 geschirmt
 Obere Grenztemperatur + 70°C
 Untere Grenztemperatur - 25°C

Wire gauge 0,25mm² (AWG 24)
 Degree of protection IP67 shielded
 Upper temperature + 70°C
 Lower temperature - 25°C


Gewicht: 0.230 Kg
 Weight: 0.230 Kg

Belegung
 Configuration

Pol
 contacts

rosa <i>pink</i>	an A <i>at A</i>
weiß <i>white</i>	an B <i>at B</i>
grau <i>grey</i>	an C <i>at C</i>
gelb <i>yellow</i>	an D <i>at D</i>
violett <i>violet</i>	an E <i>at E</i>
braun <i>brown</i>	an F <i>at F</i>
grün <i>green</i>	an G <i>at G</i>
rot-blau <i>red-blue</i>	an H <i>at H</i>
rot <i>red</i>	an J <i>at J</i>
grau-rosa <i>grey-pink</i>	an K <i>at K</i>
blau <i>blue</i>	an L <i>at L</i>
schwarz <i>black</i>	an M <i>at M</i>


Schirm durchgängig an Verschraubung
 Shield constantly at screw connection

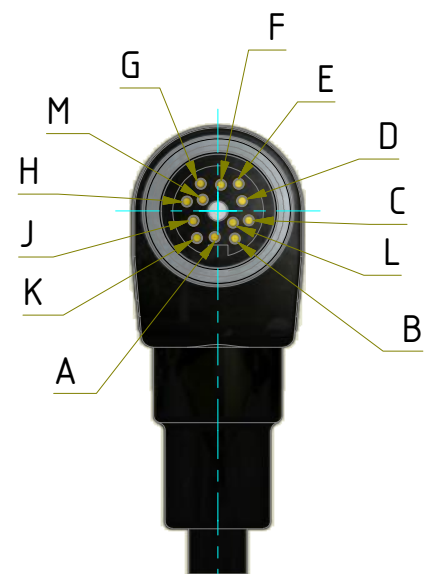

Seite 1 von 1
 Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi