



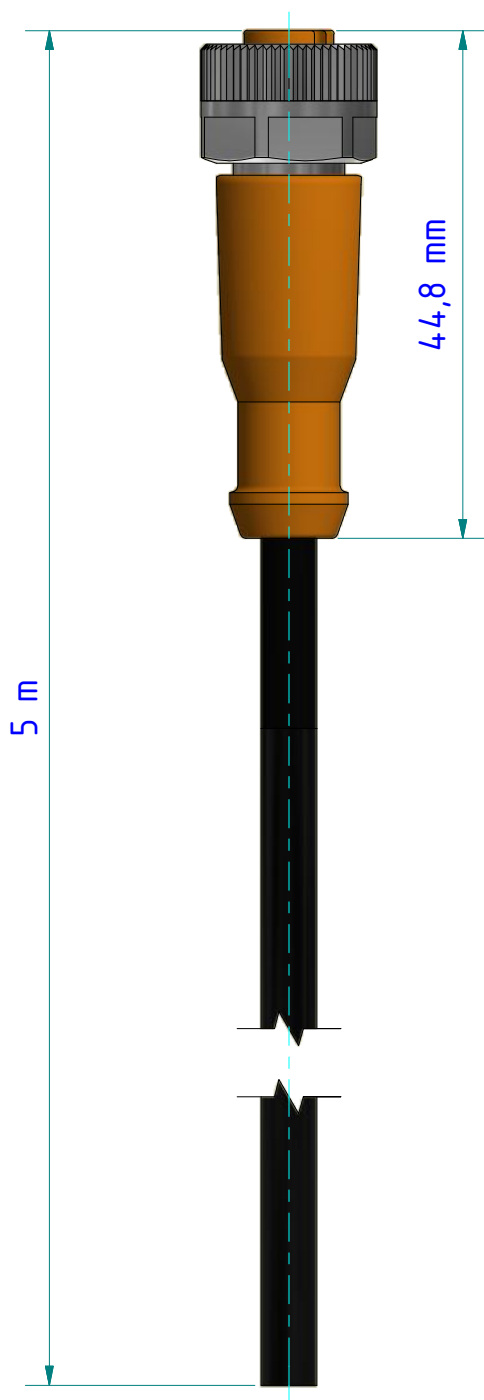

Belegung Configuration	Pol contacts
---------------------------	-----------------

braun	an 1
brown	at 1
weiß	an 2
white	at 2
blau	an 3
blue	at 3
schwarz	an 4
black	at 4
grau	an 5
grey	at 5
Schirm durchgängig an Verschraubung	
Shield constantly at screw connection	

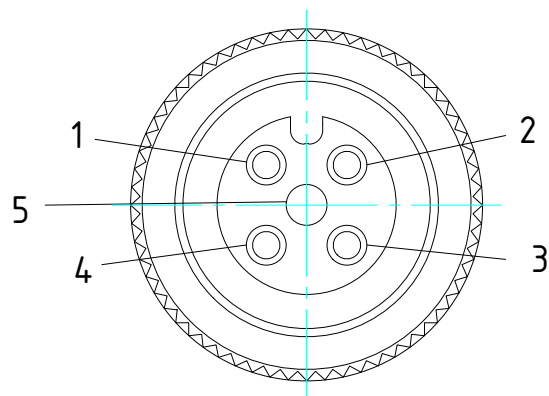

(Maßstab 3:1)

PUR-Kabel / PUR cable

Umgebungstemperatur [°C] / Ambient temperature -25...90, cULus: max. 75 °C


Schutzart / Protection IP 65 / IP 67

Gewicht: 0.220 Kg
Weight: 0.220 Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi