

Kugelflansch PB 08/I AF2
Ball flange PB 08/I AF2
nr./no. 561987

Axialluftdüse PZ 20/A
Air purge PZ 20/A
nr./no. 561176

Kniehebeladapter PZ 40/G
toggle adapter PZ 40/G
nr./no. 561867



Kühlarmatur, geschlossen PA 20/M AF4/E
Cooling jacket, sealed PA 20/M AF4/E
nr./no. 1120848

Anbaufansch PZ 20/F
Flange PZ 20/F
nr./no. 561172

Siemens-Adapter PZ 20/V
Siemens adapter PZ 20/V
nr./no. 561263



★ Bei Verwendung mit Teleoptik (PA 20.06)
muss 1 Zwischenrohr verwendet werden!
When using a telephoto lens (PA 20.06), you
must use 1 intermediate tube.

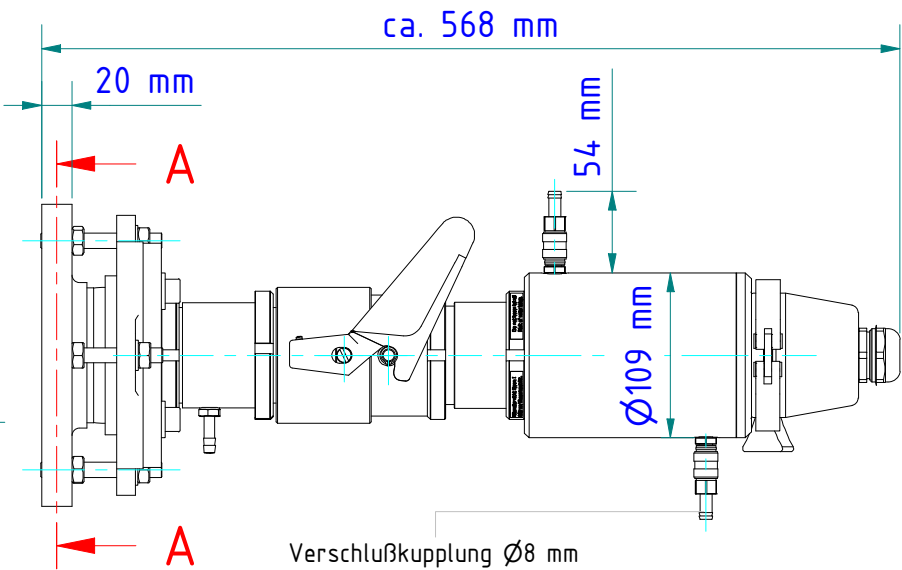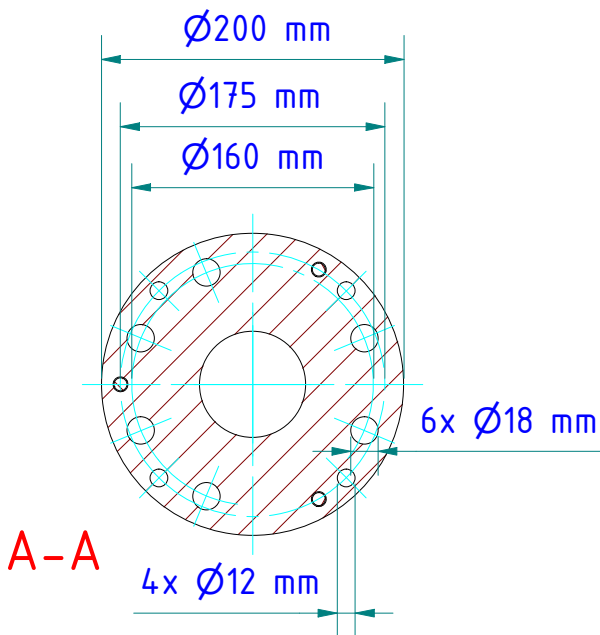


Verschlusskupplung Ø8 mm
für Schlauch mit lichter Weite 8 bis 9 mm
locking coupling Ø8 mm
for hose with inner width 8 to 9 mm

Gewicht: 0.000 Kg
Weight: 0.000 Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi