




Stückliste / Parts list		
Pos.	Artikel-Nr.: <i>order number</i>	Bezeichnung <i>title</i>
1	1023354	Pyrometer CellaTemp PA 30 AF 1/L <i>Pyrometer CellaTemp PA 30 AF 1/L</i>
2	1089108	Montagekombination PA 20-109 <i>Mounting PA 20-109</i>
3	515152	Kabel VK 01/X AF1 <i>Cable VK 01/X AF1</i>
4	1024914	Kabel VK 01/Y AF1 <i>Cable VK 01/Y AF1</i>
5	1013573	Kalibrierschein für CellaTemp PA <i>Calibration certificate for CellaTemp PA</i>


Gewicht: 4.530 Kg
Weight: 4.530 Kg



Seite 1 von 1
Page 1 of 1

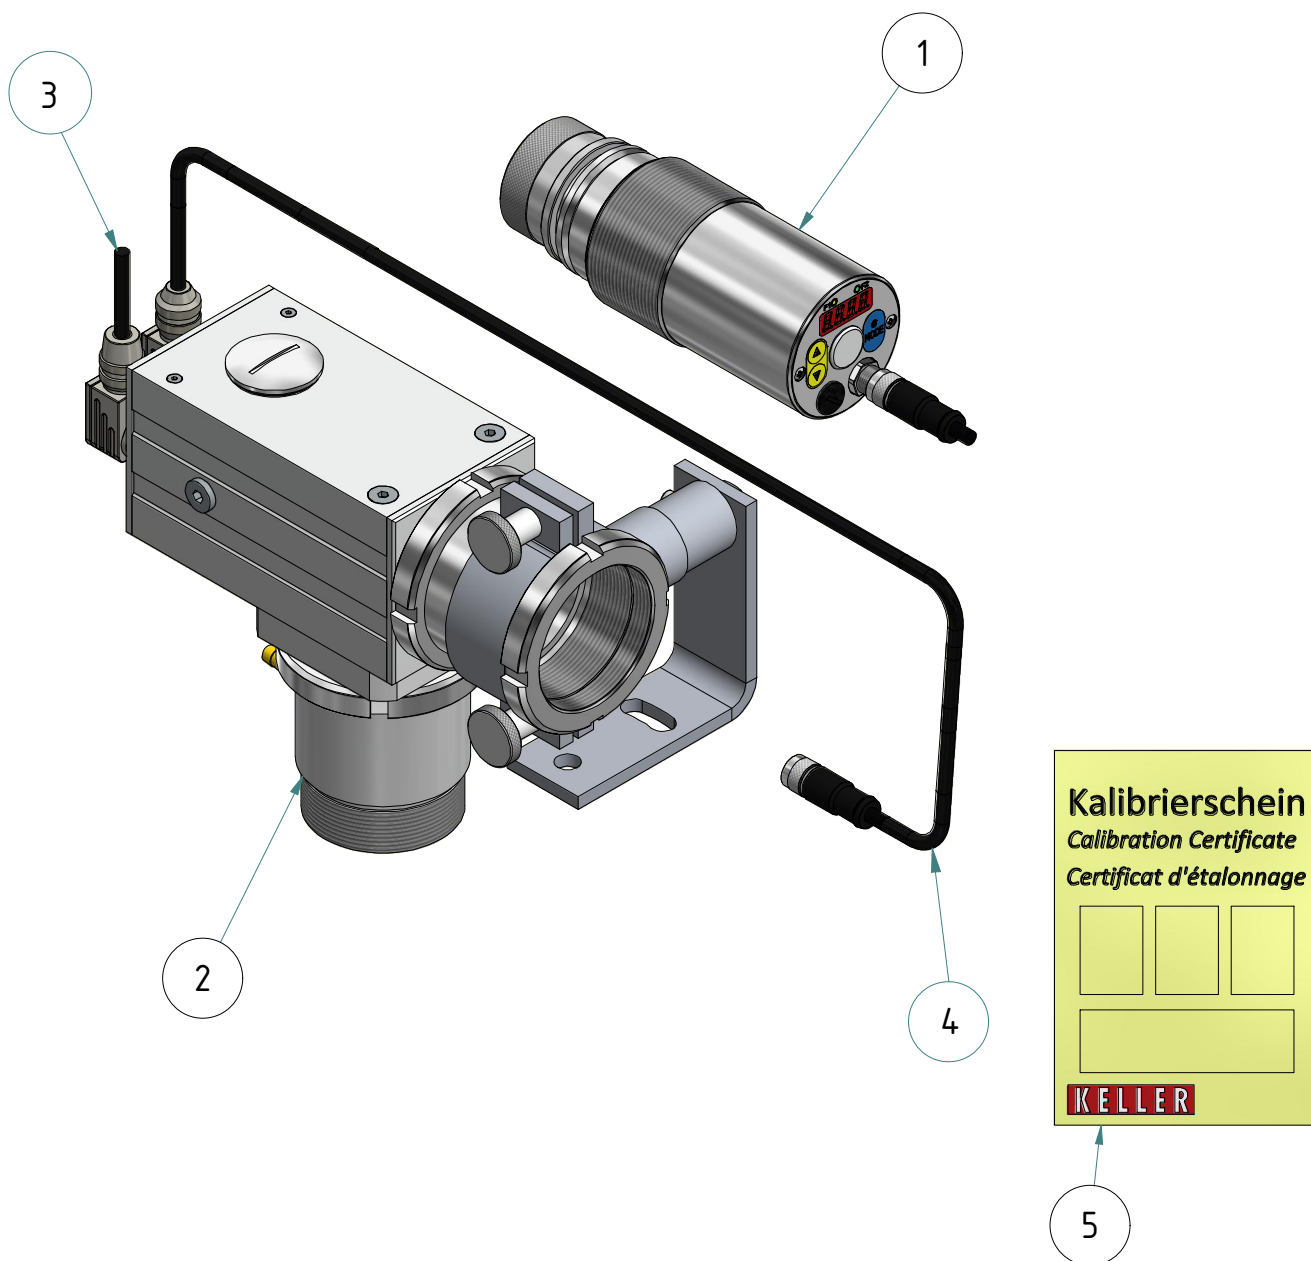

Optik Lens



	min. [mm]	max. [mm]
Super-Tele Optik PA 20.06 <i>Telephoto lens PAZ 20.06</i>	116,5	163,5
Standard Optik PZ 10.01 <i>Standard lens PZ 10.01</i>	35,0	44,4
Nah Optik PZ 10.05 <i>close-up lens PZ 10.05</i>	35,0	44,4
Standard Optik PZ 15.03 <i>Standard lens PZ 15.03</i>	51,5	65,0
Standard Optik PZ 20.01 <i>Standard lens PZ 20.01</i>	49,8	69,9
Nah Optik PZ 20.03 <i>Close-up lens</i>	49,7	67,9
Panorama Optik PZ 40.03 <i>Panorama Optik PZ 40.03</i>	52,1	67,9
Weitwinkel Optik PZ 20.05 <i>Wide-angle lens PZ 20.05</i>	62,8	64,7
Tele Optik PZ 20.06 <i>Telephoto lens PZ 20.06</i>	93,0	112,0
Spezial Optik PZ 20.08 <i>Special lens PZ 20.08</i>	35,0	44,4

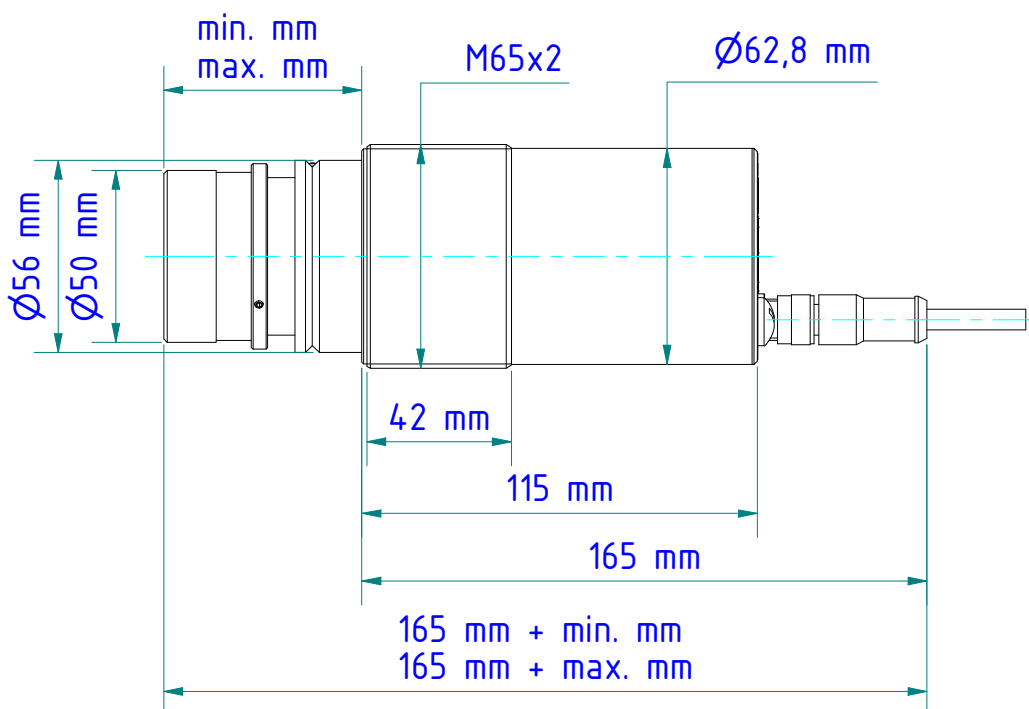

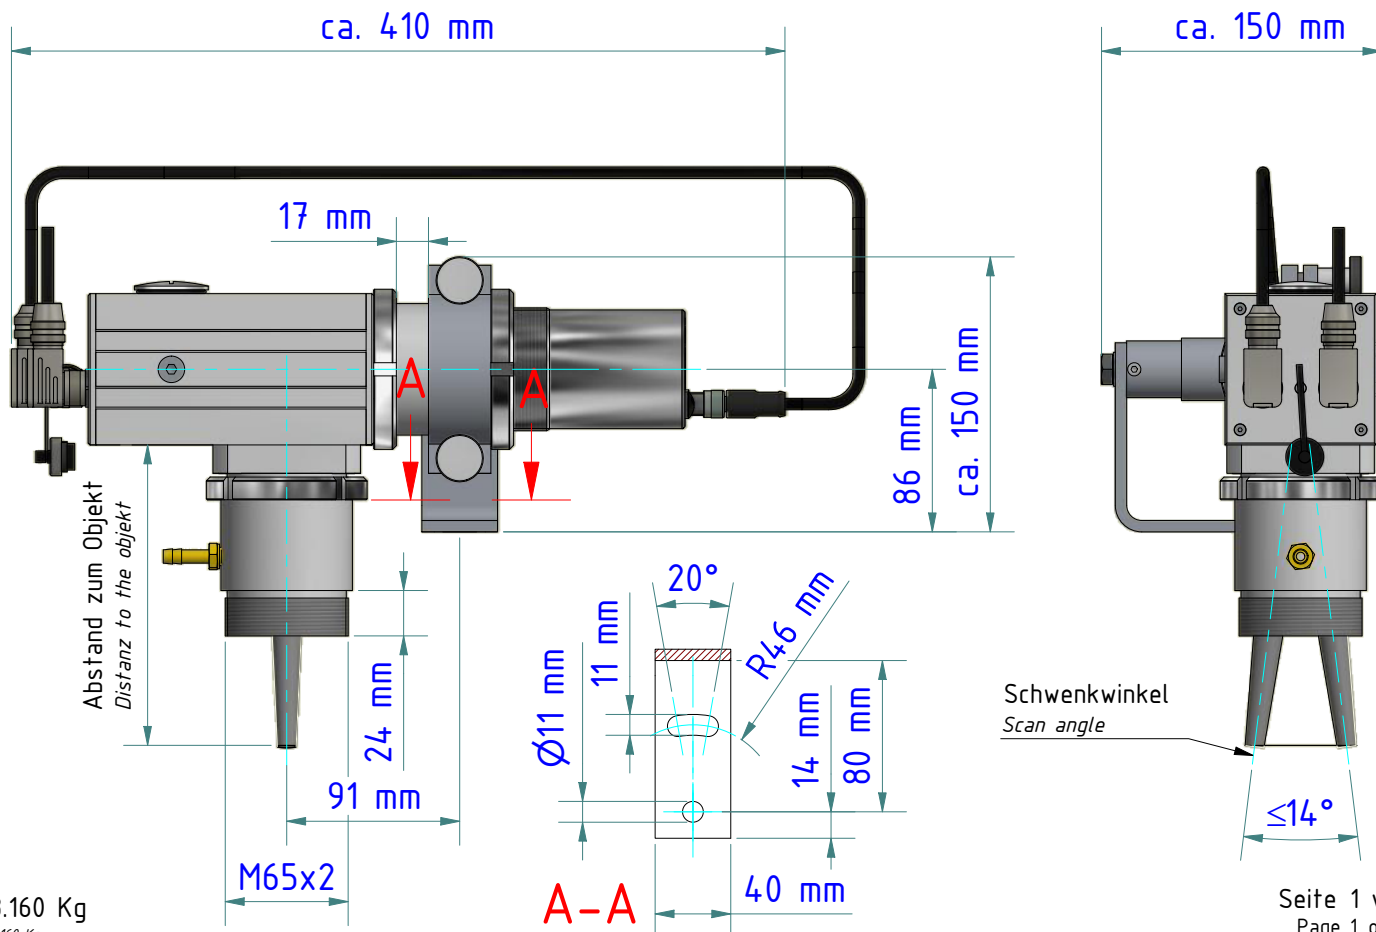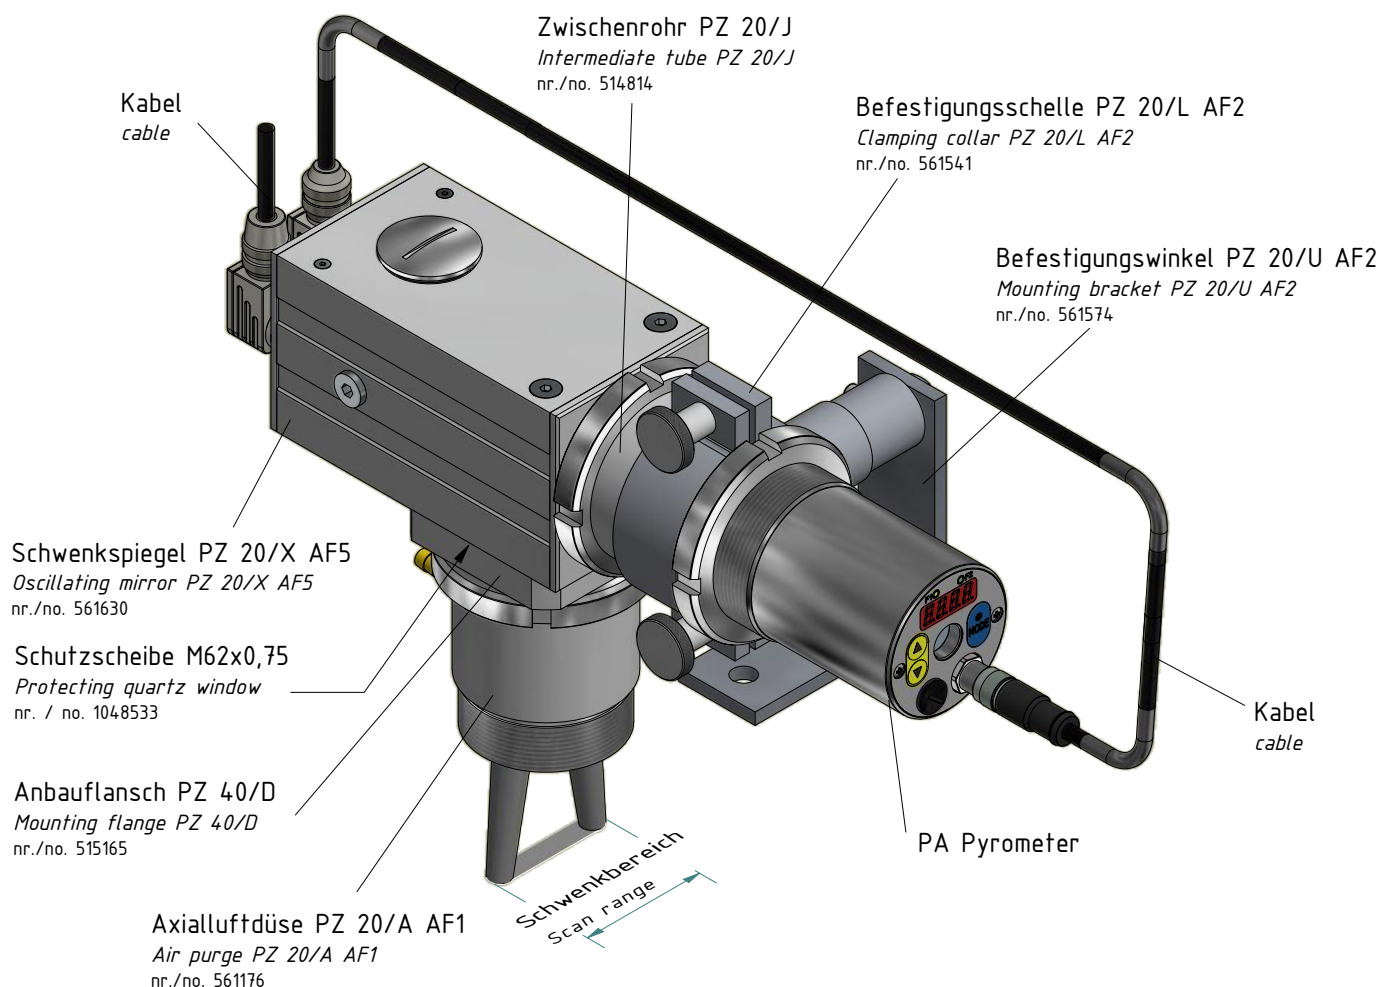

Gewicht: 3.160 Kg
 Weight: 3.160 Kg

Seite 1 von 1
 Page 1 of 1


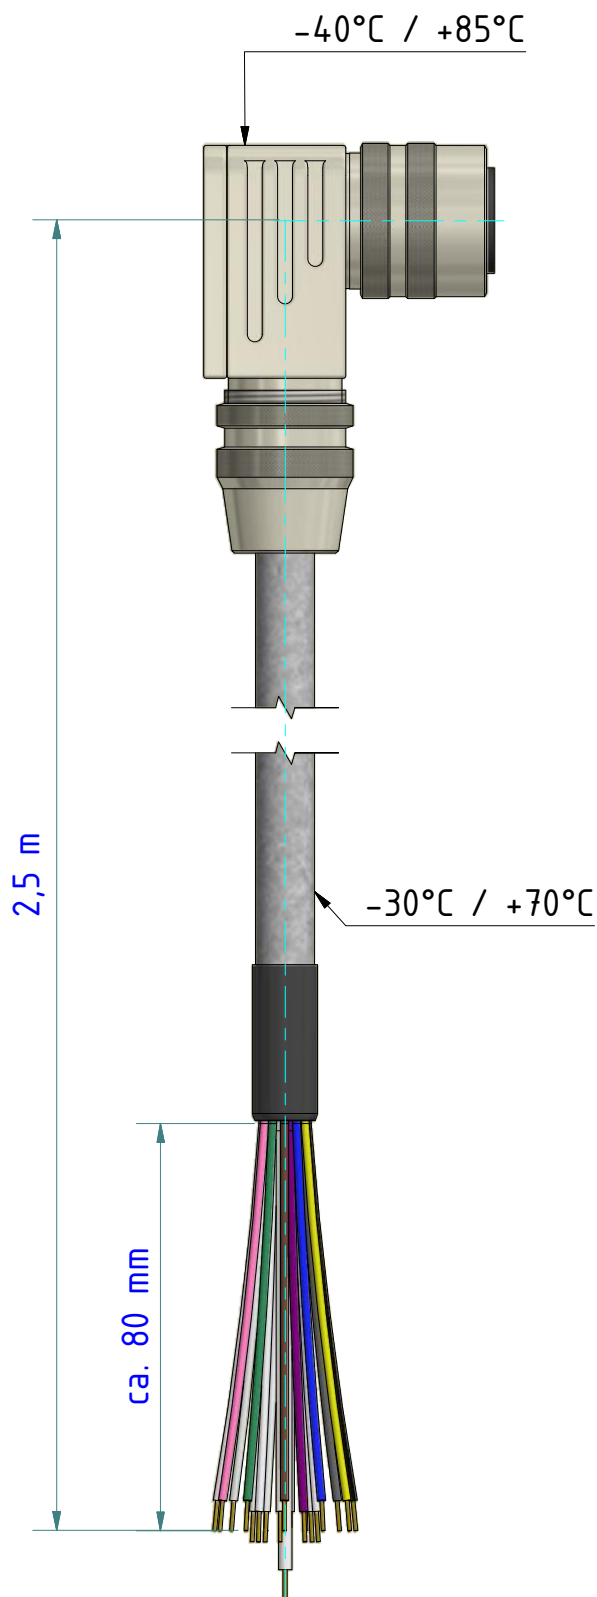
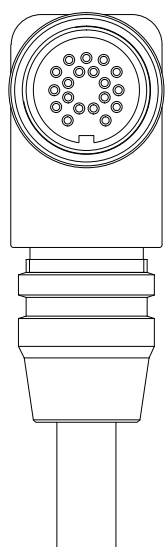


Belegung <i>Configuration</i>	Pol <i>contacts</i>
rosa <i>pink</i>	an A <i>at A</i>
weiß <i>white</i>	an B <i>at B</i>
grau <i>grey</i>	an C <i>at C</i>
gelb <i>yellow</i>	an D <i>at D</i>
violett <i>violet</i>	an E <i>at E</i>
braun <i>brown</i>	an F <i>at F</i>
grün <i>green</i>	an G <i>at G</i>
rot-blau <i>red-blue</i>	an H <i>at H</i>
rot <i>red</i>	an J <i>at J</i>
grau-rosa <i>grey-pink</i>	an K <i>at K</i>
blau <i>blue</i>	an L <i>at L</i>
schwarz <i>black</i>	an M <i>at M</i>
weiß-rosa <i>white-pink</i>	an N <i>at N</i>
grau-braun <i>grey-brown</i>	an O <i>at O</i>
braun-grün <i>brown-green</i>	an P <i>at P</i>
weiß-grün <i>white-green</i>	an R <i>at R</i>
gelb-braun <i>yellow-brown</i>	an S <i>at S</i>
weiß-gelb <i>white-yellow</i>	an T <i>at T</i>
weiß-grau <i>white-grey</i>	an U <i>at U</i>

Schirm durchgängig an Verschraubung
Shield constantly at screw connection

Gewicht: 0.308 Kg
Weight: 0.308 Kg

Seite 1 von 1
Page 1 of 1

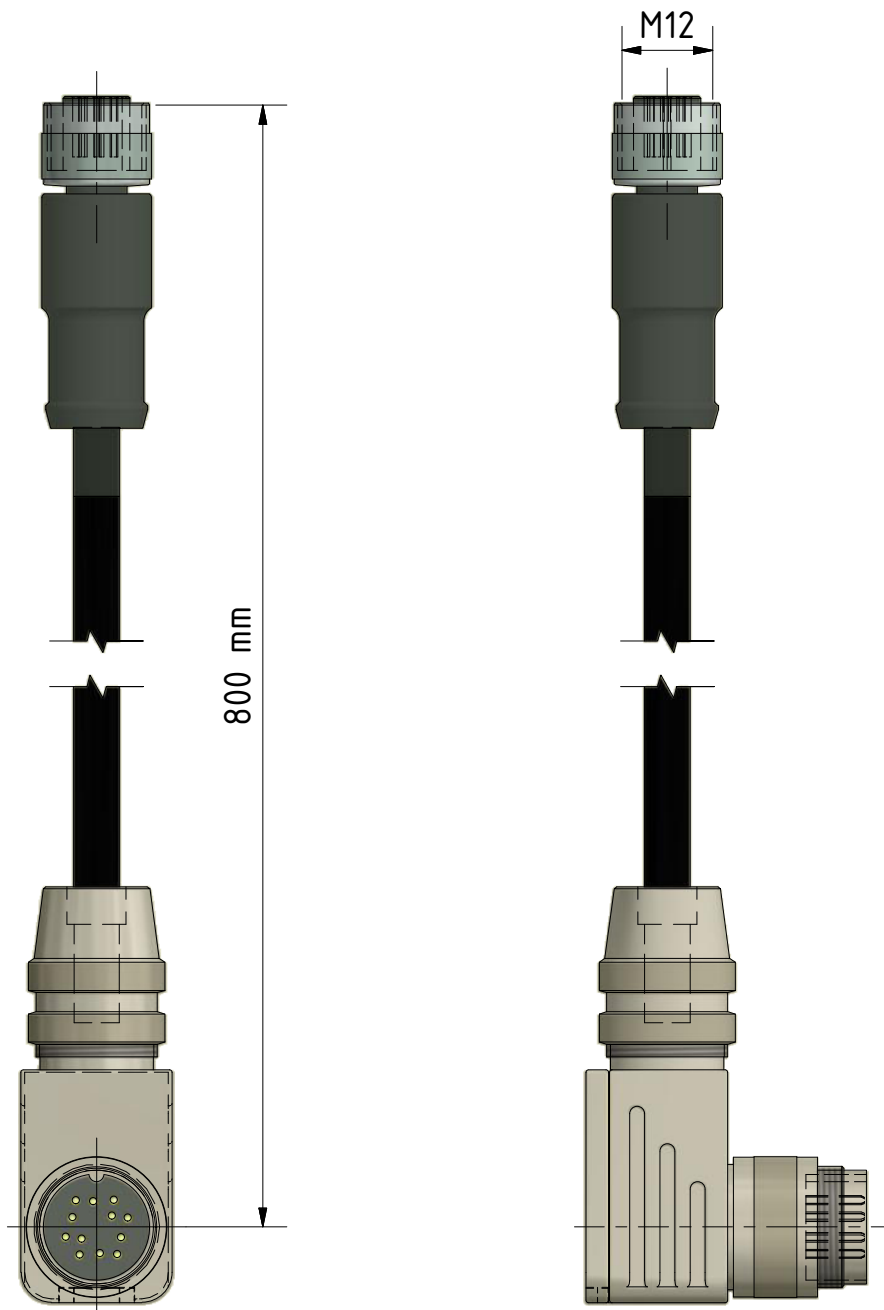


Gewicht: 0.122 Kg
Weight: 0.122 Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi