


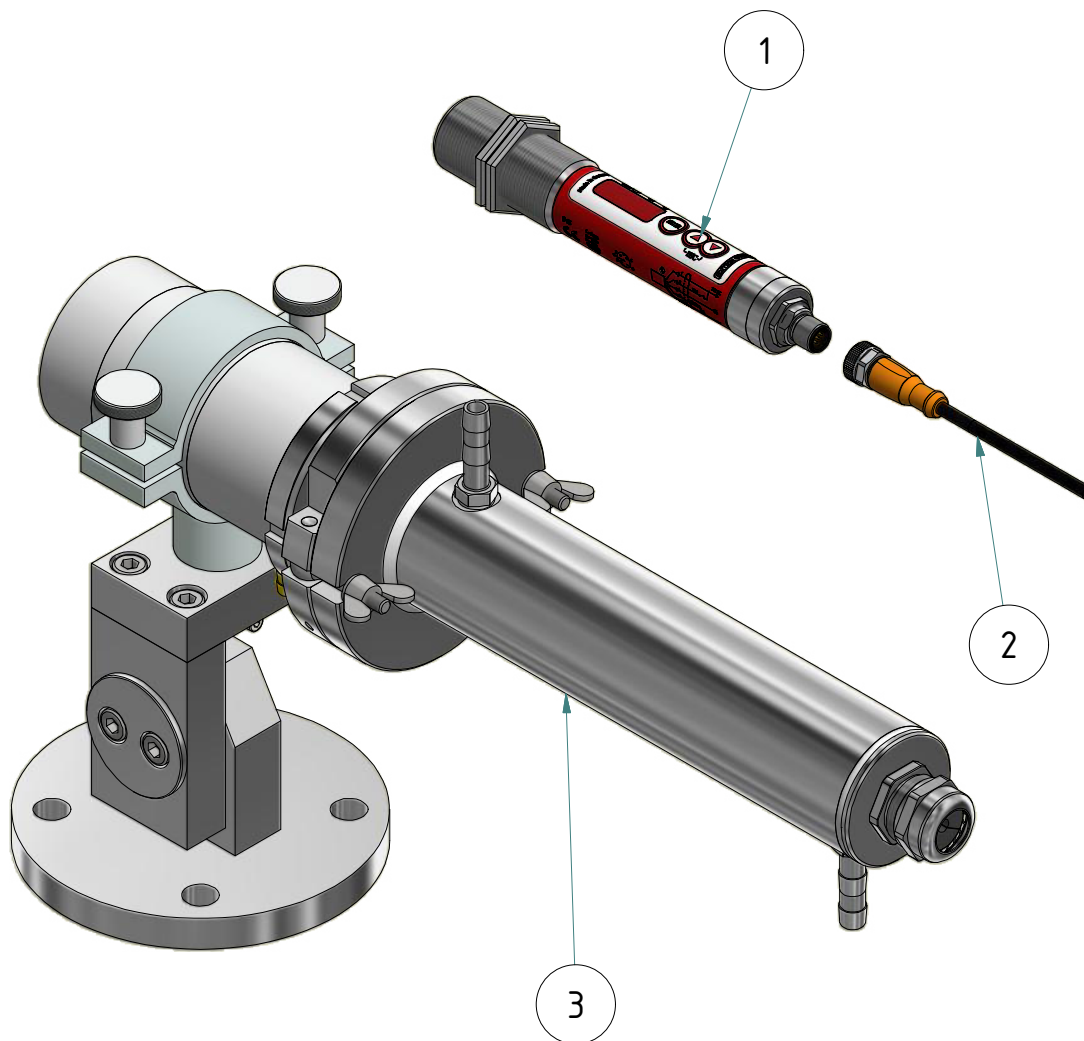


Stückliste / Parts list

Pos.	Artikel-Nr.: <i>order number</i>	Bezeichnung <i>title</i>
1	1083336	Pyrometer CellaTemp PK 11 AF 2/IO <i>Pyrometer CellaTemp PK 11 AF 2/IO</i>
2	10043813	Kabel VK 02/L AF 1 <i>Cable VK 02/L AF 1</i>
3	1087450	Montagekombination PK 01-027 <i>Mounting PK 01-027</i>



Gewicht: 0.600 Kg
Weight: 0.600 Kg

Seite 1 von 1
Page 1 of 1

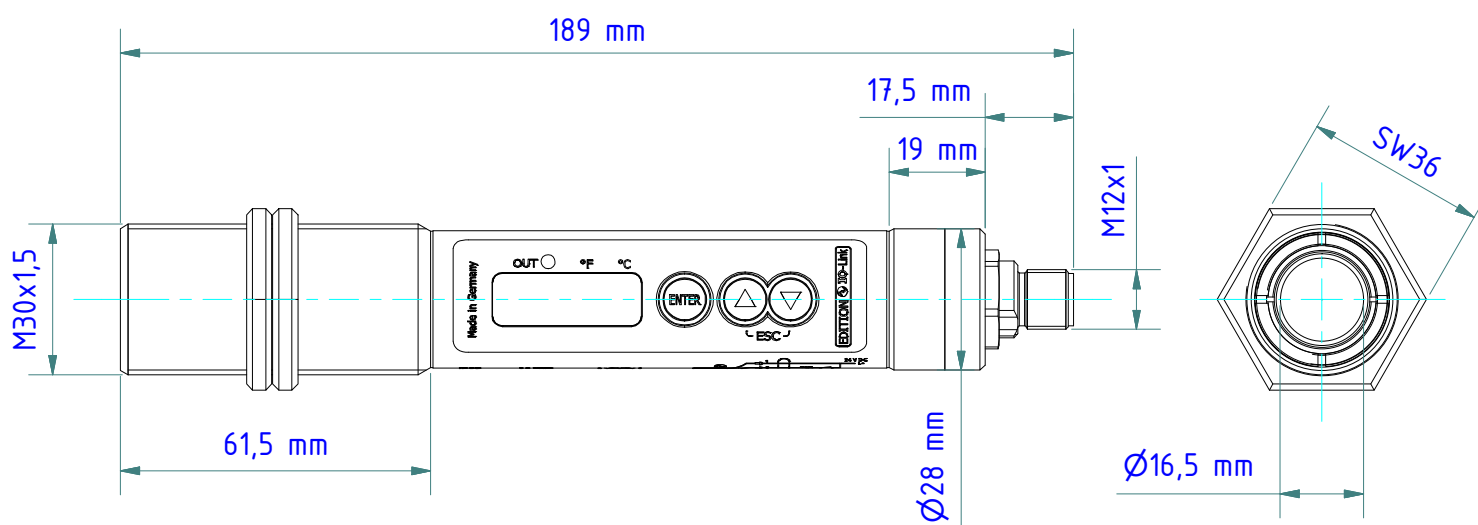


Gewicht: 0.320 Kg
Weight: 0.320 Kg

Seite 1 von 2
Page 1 of 2

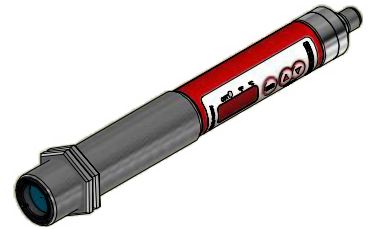


Zubehör: Equipment:





VK 02/L AF1 (5m)
nr./no.: 1043813

VK 02/L AF2 (10m)
nr./no.: 1048085

VK 02/L AF3 (25m)
nr./no.: 1082724




VK 02/R AF1 (5m)
nr./no.: 1069551



VK 03/A AF1 (5m)
nr./no.: 1086480

VK 03/A AF2 (10m)
nr./no.: 1086481


VK 03/R AF3 (20m)
nr./no.: 1086483

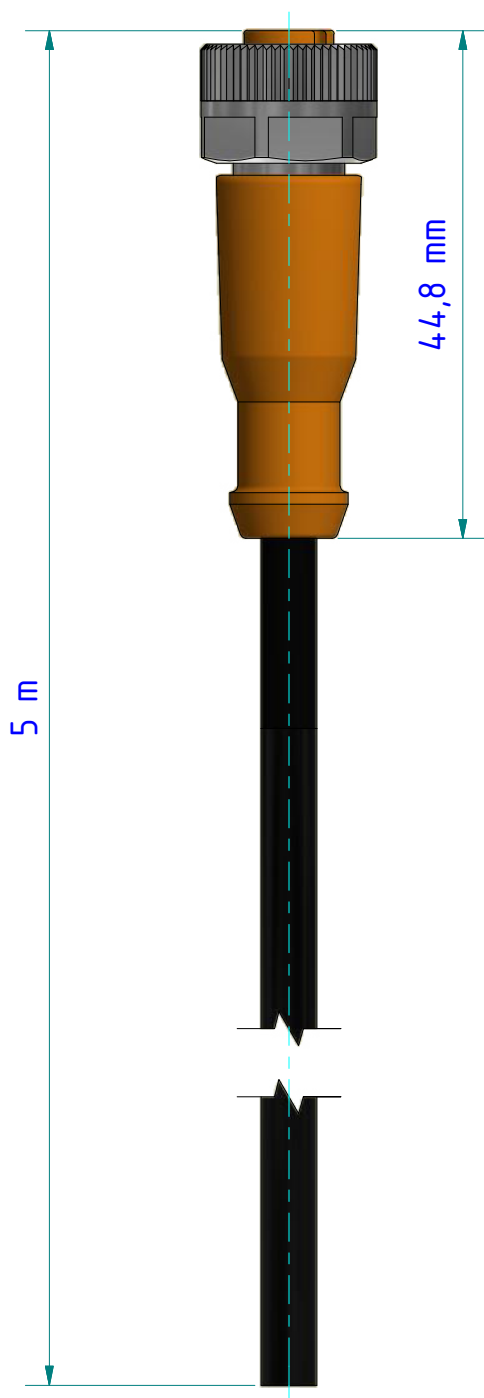

Belegung
Configuration

Pol
contacts

braun	an 1
brown	at 1
weiß	an 2
white	at 2
blau	an 3
blue	at 3
schwarz	an 4
black	at 4
grau	an 5
grey	at 5
Schirm durchgängig an Verschraubung	
Shield constantly at screw connection	

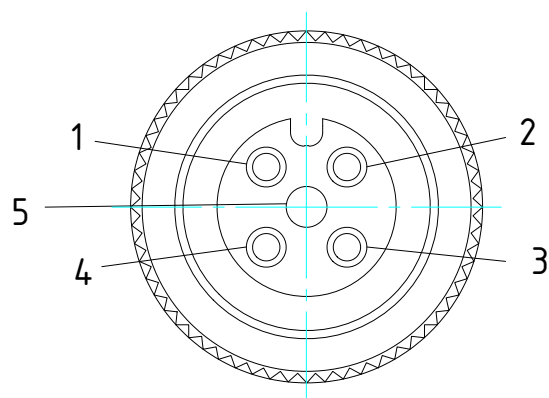

(Maßstab 3:1)

PUR-Kabel / *PUR cable*

Umgebungstemperatur [°C] / *Ambient temperature* -25...90, cULus: max. 75 °C

Schutzart / *Protection* IP 65 / IP 67

Gewicht: 0.220 Kg
Weight: 0.220 Kg

Seite 1 von 1
Page 1 of 1

Befestigungsschelle PZ 20/L AF2

Clamping collar PZ 20/L AF2
nr./no. 561541

Staubblende PZ 20/T
Dust stop PZ 20/T
nr./no. 561253


Zwischenrohr PZ 20/J
Intermediate tube PZ 20/J
nr./no. 514814

Axialluftdüse PZ 20/A AF1
Air purge PZ 20/A AF1
nr./no. 561176

Kühlarmatur geschlossen PK 01/C AF2
Cooling jacket, sealed PK 01/C AF2
nr./no. 1078822

Halterung PB 08/Q AF1
mounting PB 08/Q AF1
nr./no. 1080289

Flansch PB 08/R AF1
flange PB 08/R AF1
nr./no. 1080288

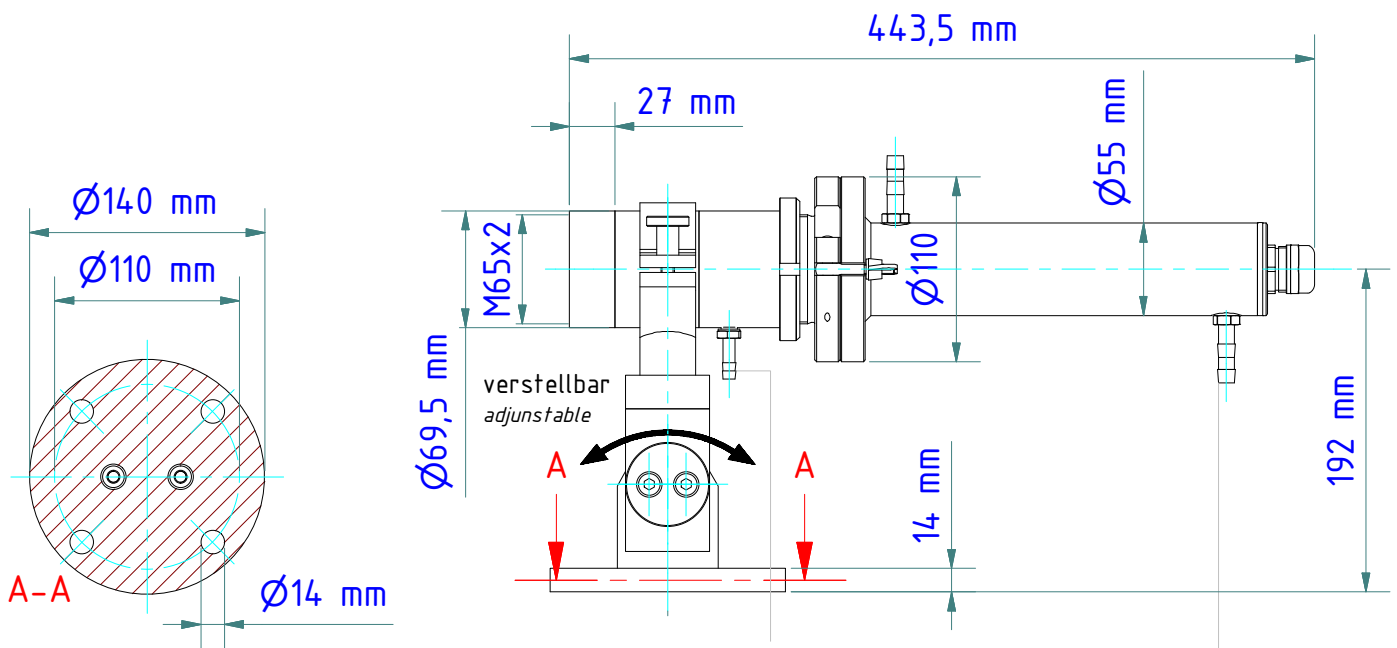


Schlauchtülle G1/8"
für Schlauch mit lichter Weite 8 bis 9 mm
Hose nozzle G1/8"
for hose with inner width 8 to 9 mm

Seite 1 von 1
Page 1 of 1

Gewicht: 9.170 Kg
Weight: 9.170 Kg



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi