

Staubblende PZ 10/T
Dust stop PZ 10/T
nr./no. 561257

Zwischenrohr PZ 20/C
Intermediate tube PZ 20/C
nr./no. 561174

Befestigungsschelle PZ 20/L AF2
Clamping collar PZ 20/L AF2
nr./no. 561541



Kühlarmatur PZ 20/B AF5
Cooling jacket PZ 20/B AF5
nr./no. 561708

Axialluftdüse PZ 20/A AF1
Air purge PZ 20/A AF1
nr./no. 561176

PZ Profibus
Pyrometer

* PZ 20/J
nur bei Verwendung der Teleoptik einsetzen
* PZ 20/J
only to use by using the teleoptics

Halterung PB 08/K AF2
Clamping device PB 08/K AF2
nr./no. 1016808

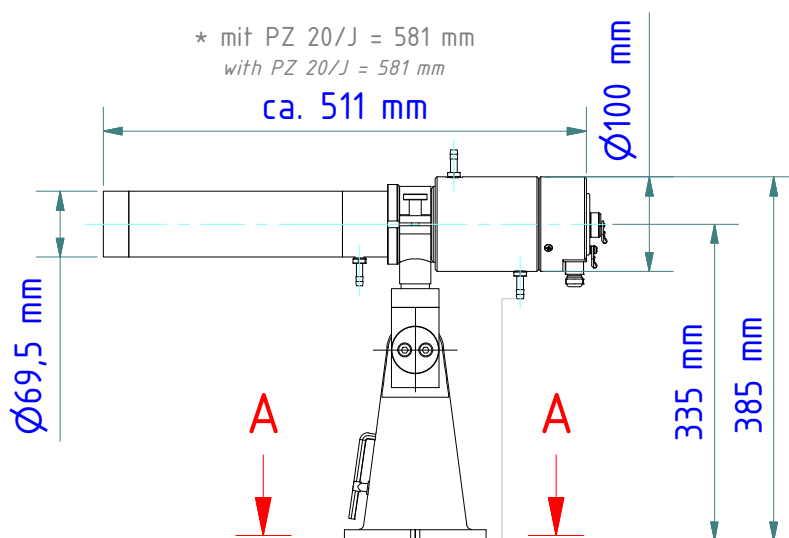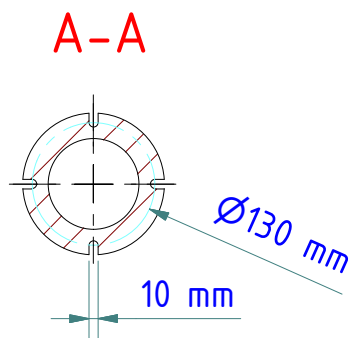

Schlauchtülle G1/8"
für Schlauch mit lichter Weite 8 bis 9 mm
Hose nozzle G1/8"
for hose with inner width 8 to 9 mm

Gewicht: 6.900 Kg
Weight: 6.900 Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi