


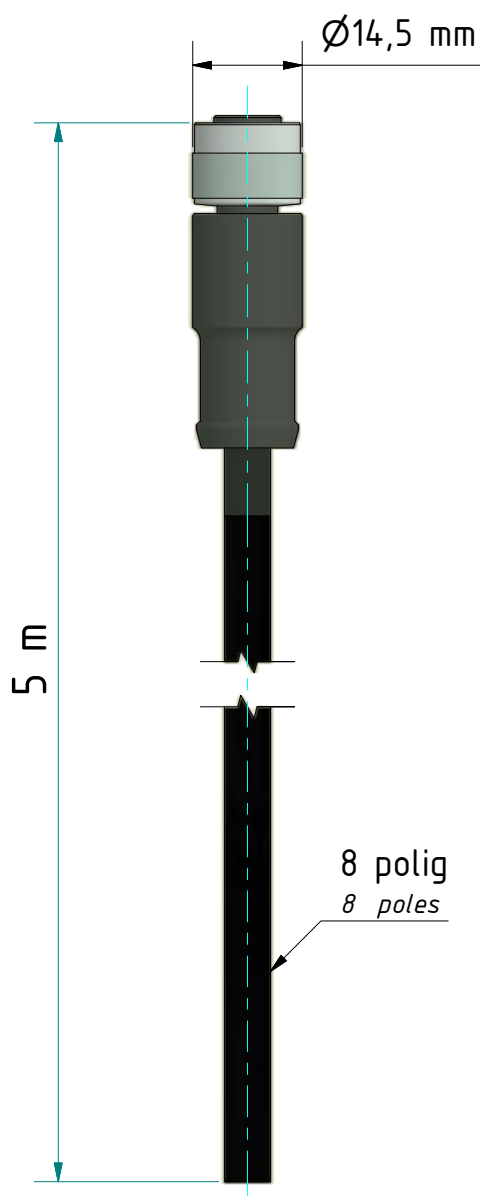

Belegung


Configuration

Pol

contacts

weiß	an 1
white	at 1
braun	an 2
brown	at 2
grün	an 3
green	at 3
gelb	an 4
yellow	at 4
grau	an 5
grey	at 5
rosa	an 6
pink	at 6
blau	an 7
blue	at 7
rot	an 8
red	at 8

Schirm durchgängig an Verschraubung
Shield constantly at screw connection

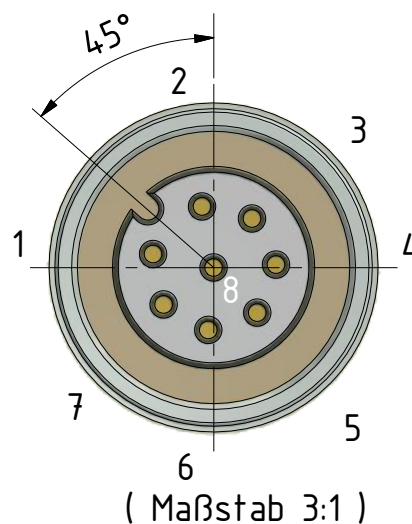

Anschlussquerschnitt 0,25mm² (AWG 24)

Schutzart IP68 / IP67 geschirmt

Obere Grenztemperatur + 85°C

Untere Grenztemperatur - 25°C

Wire gauge 0,25mm² (AWG 24)

Degree of protection IP68 / IP67 shielded

Upper temperature + 85°C

Lower temperature - 25°C

Gewicht: 0.290 Kg

Weight: 0.290 Kg

Seite 1 von 1

Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi