



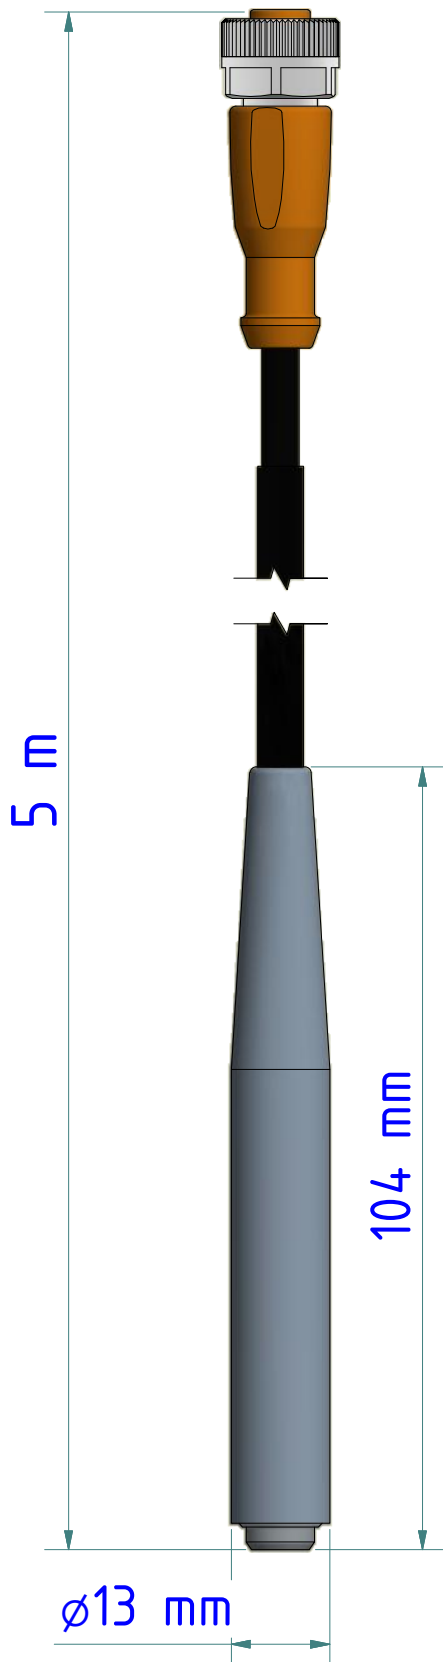


1 braun
brown



3 blau
blue

(2 : 1)

(2 : 1)

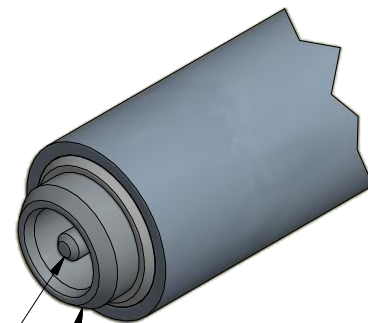

Aussenkontakt = Masse
external contact = ground

Mittenkontakt +24V
center contact +24V

5m Anschlußkabel für PKS
Spannungsversorgung = 24V
DC-Kupplung 2 polig; 5,5 mm; Pin 2,1 mm


5m cable set for PKS
power supply = 24V
DC-coupler 2-pin; 5,5 mm; pin 2,1 mm

Seite 1 von 1
Page 1 of 1

Gewicht: 0.240 Kg
Weight: 0.240 Kg



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi