

Kugelflansch PB 08/I AF2

Ball flange PB 08/I AF2

nr./no. 561987

Axialluftdüse PZ 20/A

Air purge PZ 20/A

nr./no. 561176

Kniehebeladapter PZ 40/G

toggle adapter PZ 40/G

nr./no. 561867

Kühlarmatur, geschlossen PA 20/M AF4

Cooling jacket, sealed PA 20/M AF4

nr./no. 1048201

Anbaufansch PZ 20/F

Flange PZ 20/F

nr./no. 561172

Siemens-Adapter PZ 20/V



Siemens adapter PZ 20/V

nr./no. 561263



★ Bei Verwendung mit Teleoptik (PA 20.06) muss 1 Zwischenrohr verwendet werden!

When using a telephoto lens (PA 20.06), you must use 1 intermediate tube.

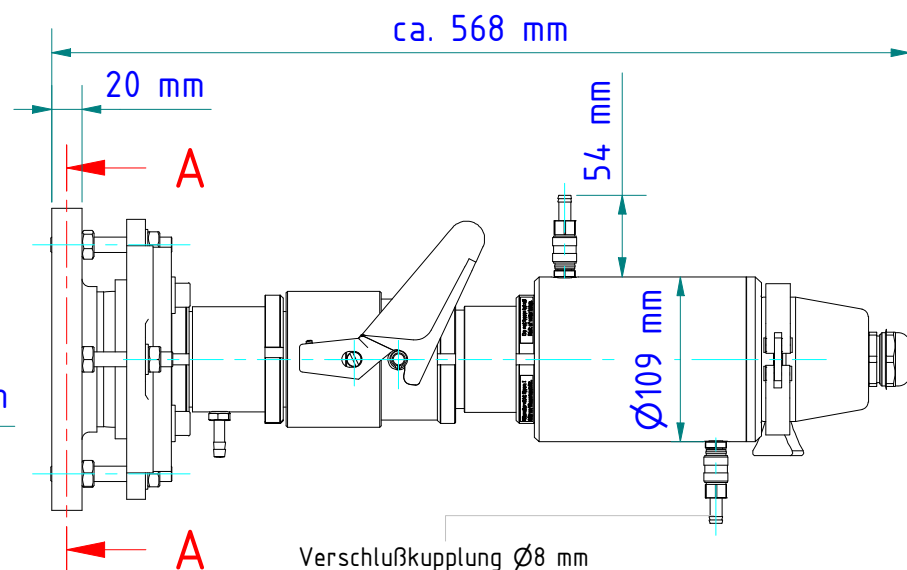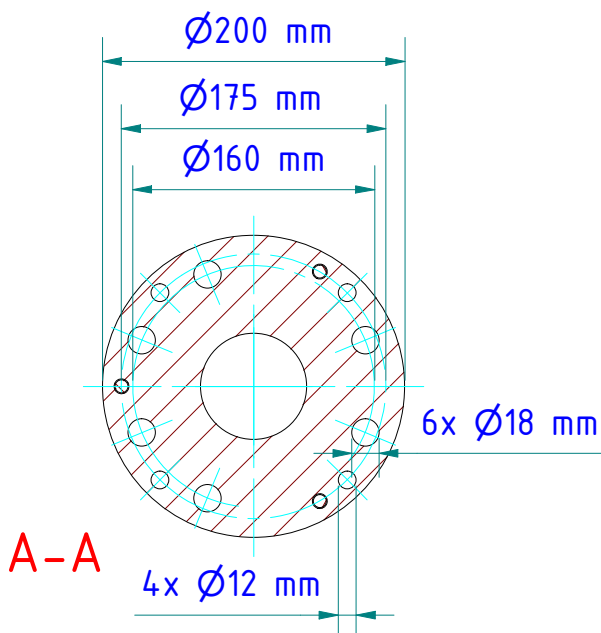

Verschlusskupplung Ø8 mm

für Schlauch mit lichter Weite 8 bis 9 mm

locking coupling Ø8 mm

for hose with inner width 8 to 9 mm

Seite 1 von 1

Page 1 of 1

Gewicht: 8.220 Kg

Weight: 8.220 Kg

KELLER
www.keller.de/its

Montagekombination
Mounting


PA 20-123

Artikel-Nr.: 1118219

Ersteller: Neukötter 11.05.2022 Z-Index: 00



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi