


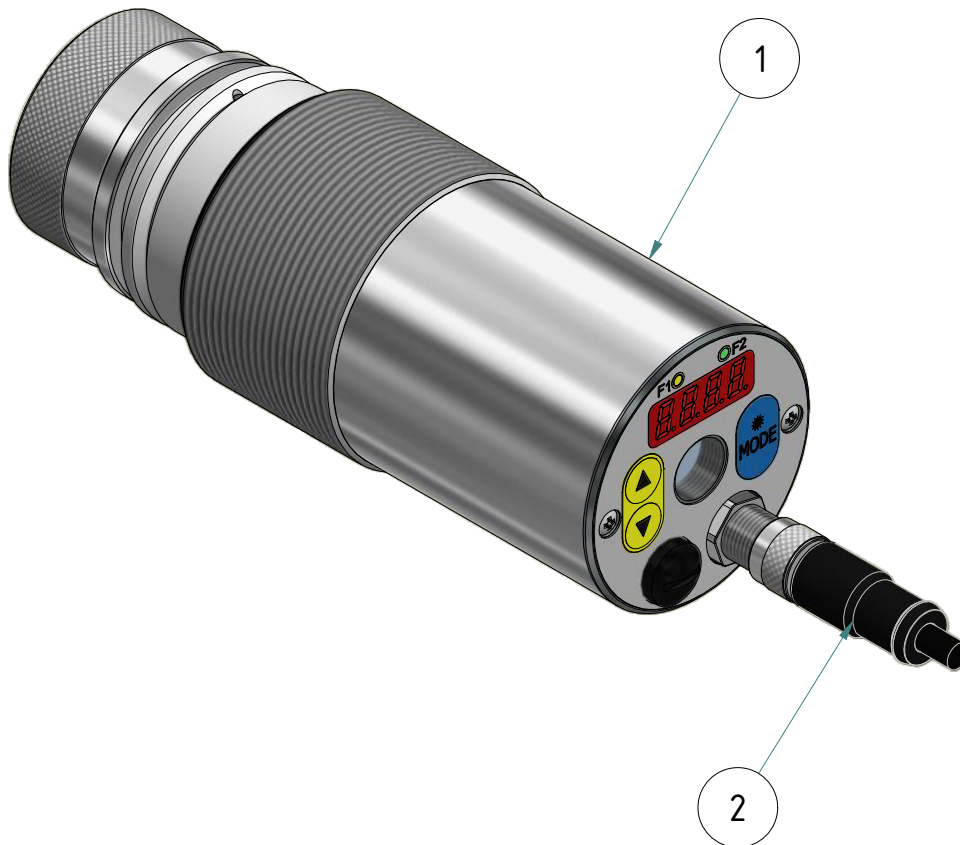

jedoch ohne
- USB Kabel VK 11/D 1009677

but without
- USB cable VK 11 / D 1009677

Stückliste / Parts list		
Pos.	Artikel-Nr.: order number	Bezeichnung title
1	1026585	Pyrometer CellaTemp PA 40 AF 7 Pyrometer CellaTemp PA 40 AF 7
2	1013909	Kabel VK 02/A AF 1 Cable VK 02/A AF 1


Gewicht: 1.220 Kg
Weight: 1.220 Kg


Seite 1 von 1
Page 1 of 1



Optik

Optik Lens	min. [mm]	max. [mm]
Standard Optik PZ 10.01 Standard lens PZ 10.01	35,0	44,4
Nah Optik PZ 10.05 close-up lens PZ 10.05	35,0	44,4
Standard Optik PZ 15.03 Standard lens PZ 15.03	51,5	65,0
Standard Optik PZ 20.01 Standard lens PZ 20.01	49,8	69,9
Nah Optik PZ 20.03 Close-up lens	49,7	67,9
Panorama Optik PZ 40.03 Panorama Optik PZ 40.03	52,1	67,9
Weitwinkel Optik PZ 20.05 Wide-angle lens PZ 20.05	62,8	64,7
Tele Optik PZ 20.06 Telephoto lens PZ 20.06	93,0	112,0
Spezial Optik PZ 20.08 Special lens PZ 20.08	35,0	44,4

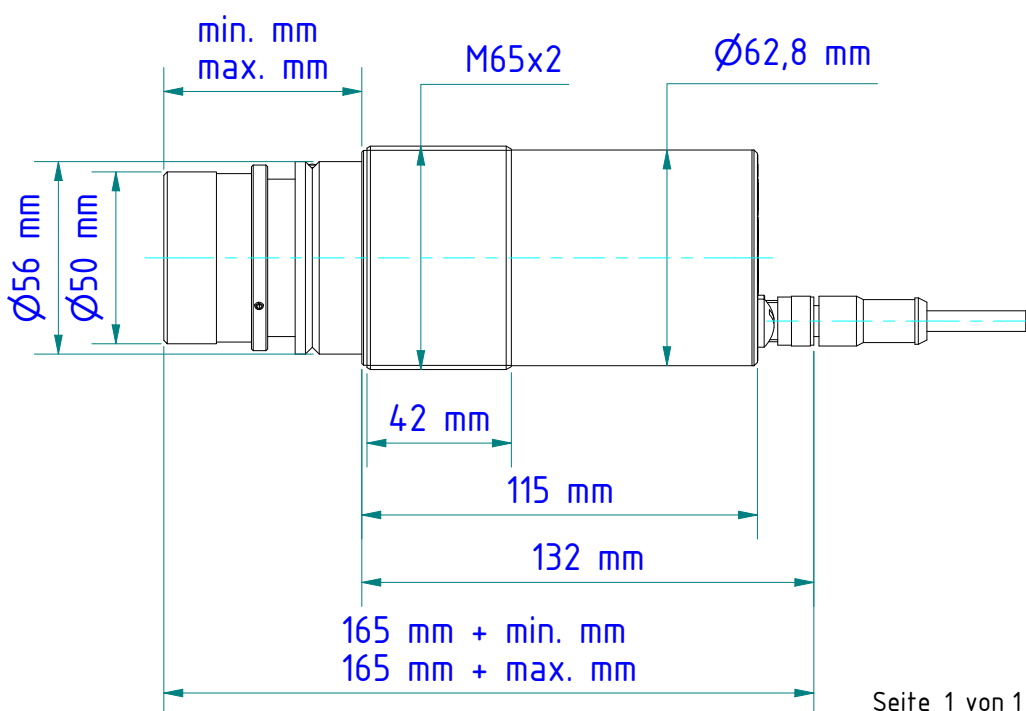

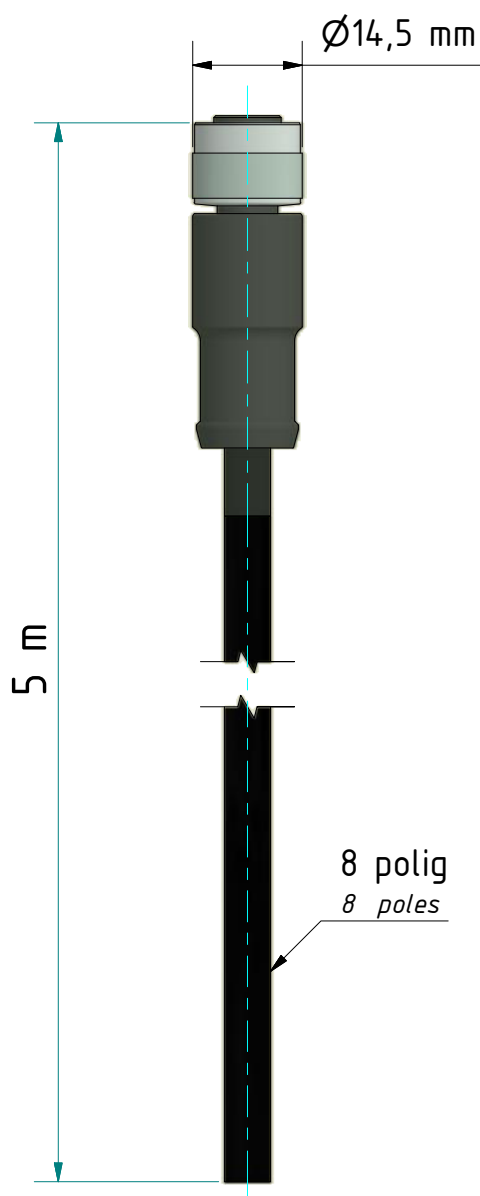

Belegung


Configuration

Pol

contacts

weiß	an 1
white	at 1
braun	an 2
brown	at 2
grün	an 3
green	at 3
gelb	an 4
yellow	at 4
grau	an 5
grey	at 5
rosa	an 6
pink	at 6
blau	an 7
blue	at 7
rot	an 8
red	at 8

Schirm durchgängig an Verschraubung
Shield constantly at screw connection

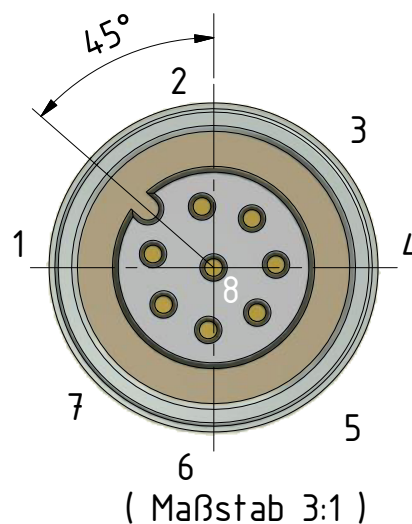

Anschlussquerschnitt 0,25mm² (AWG 24)
Schutzart IP68 / IP67 geschirmt
Obere Grenztemperatur + 85°C
Untere Grenztemperatur - 25°C

Wire gauge 0,25mm² (AWG 24)
Degree of protection IP68 / IP67 shielded
Upper temperature + 85°C
Lower temperature - 25°C

Gewicht: 0.290 Kg


Weight: 0.290 Kg

Seite 1 von 1

Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi