


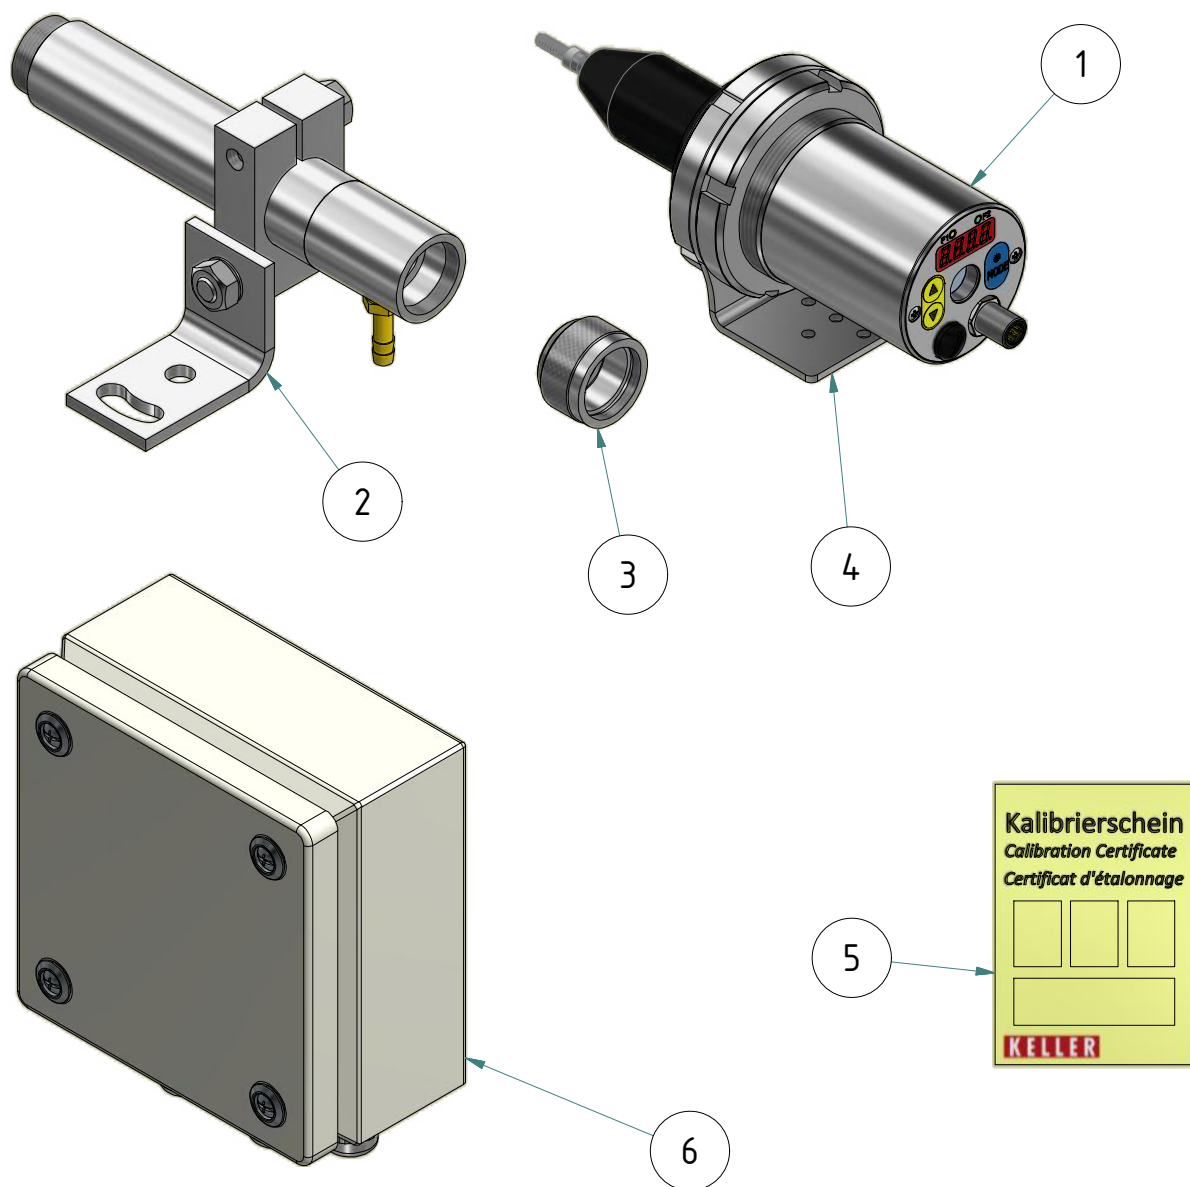

Stückliste / Parts list

Pos.	Artikel-Nr.: order number	Bezeichnung title
1	1041672	Pyrometer CellaTemp PA 81 AF 11 <i>Pyrometer CellaTemp PA 81 AF 11</i>
2	1064571	Montagekombination PK 01-007 <i>Mounting PK 01-007</i>
3	561487	Quarz-Scheibenvorsatz PS 01/I AF2 <i>Quartz window PS 02/I AF2</i>
4	1009679	Befestigungswinkel PA 11/U <i>Mounting bracket PA 11/U</i>
5	1013573	Kalibrierschein für CellaCast PA <i>Calibration certificate for CellaCast PA</i>
6	1040152	Klemmenkasten für PA VK 30.02 <i>Terminal box VK 30.02</i>


Gewicht: 5.060 Kg
Weight: 5.060 Kg

Seite 1 von 1
Page 1 of 1


Lichtwellenleiter
fibre optic cable





Kabel VK 02/A
Cable VK 02/V

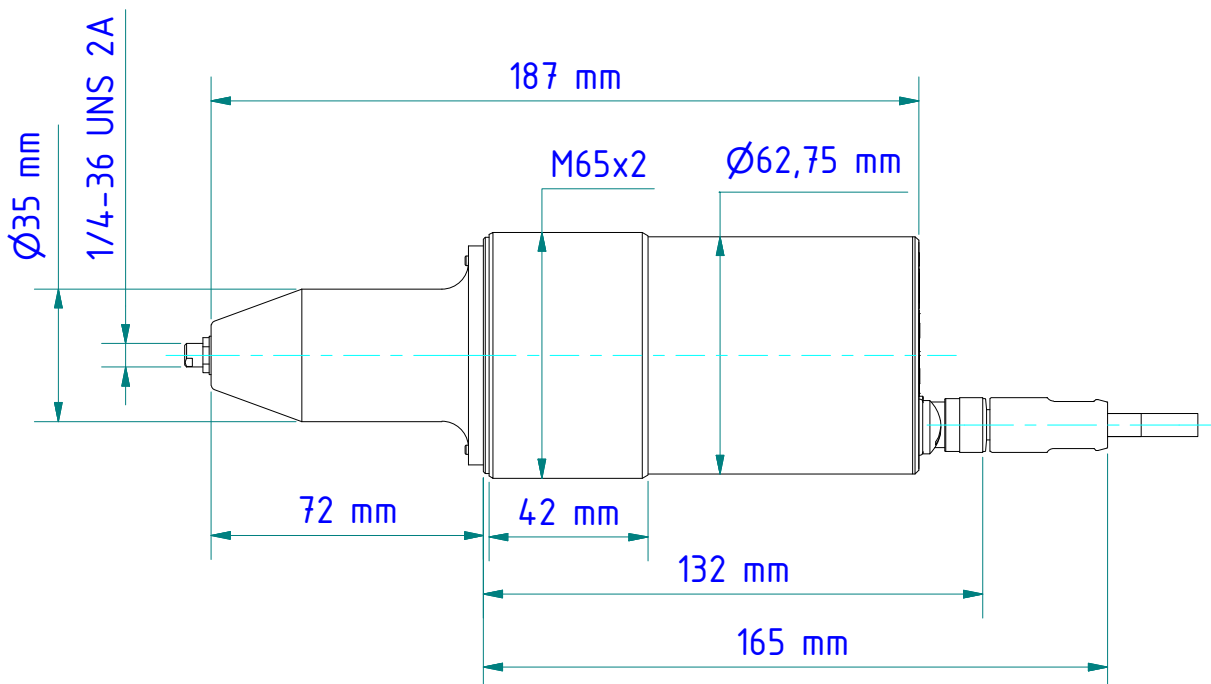

This technical drawing illustrates a mechanical assembly. A horizontal shaft is shown, passing through a vertical bracket. The bracket is mounted on a base plate. A nut and washer are used to secure the bracket to the base plate. The base plate features a circular hole and a rectangular slot. A leader line points to the shaft, and another leader line points to the base plate.



Seite 1 von 1
Page 1 of 1


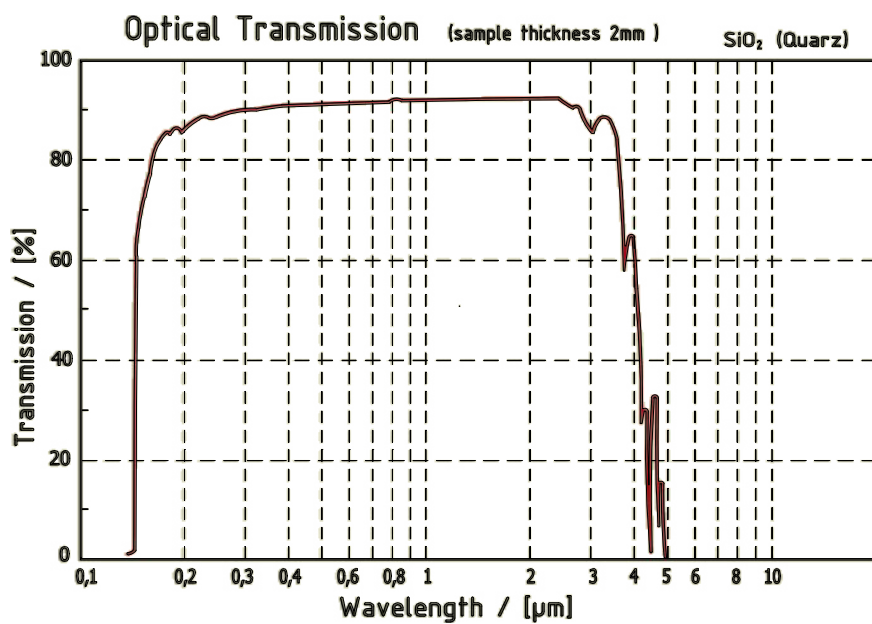
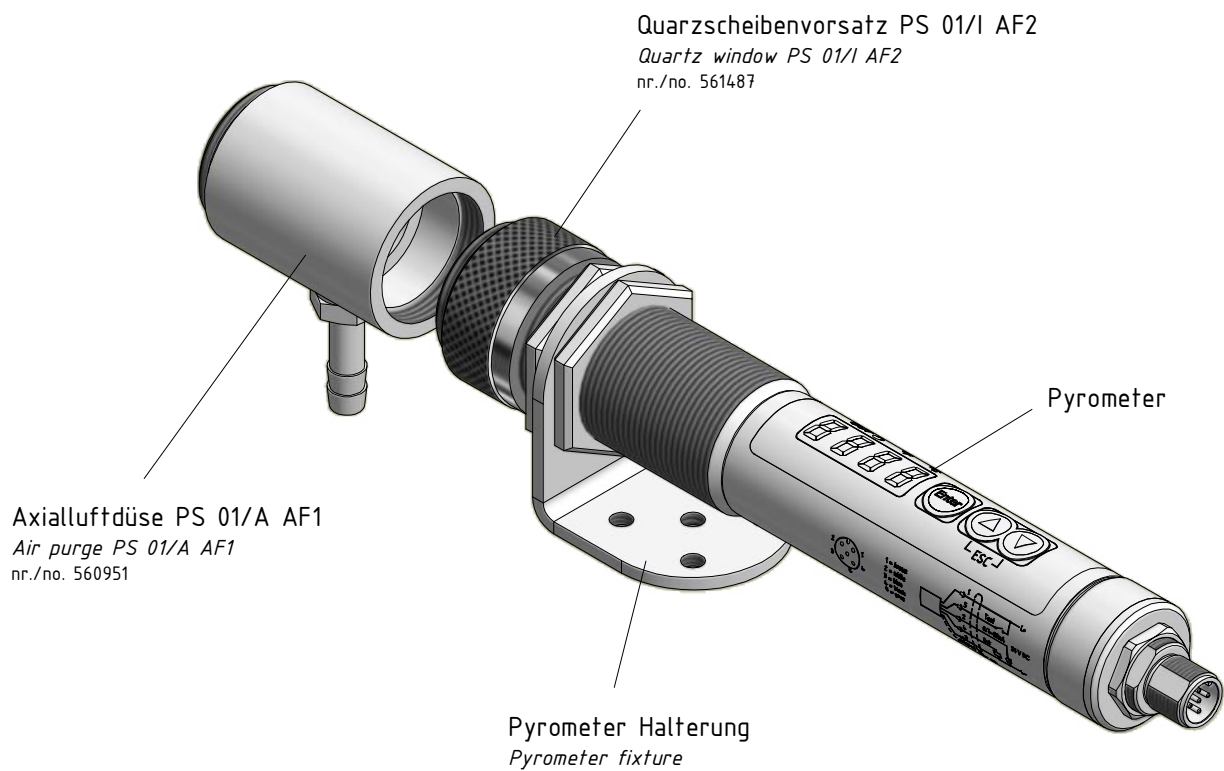


Pmax. = 0,5 bar
Pmax. = -0,5 bar

T=0.93



Gewicht: 0.078 Kg
Weight: 0.078 Kg
Werkstoff: 1.4305
Material: 1.4305

Seite 1 von 2
Page 1 of 2

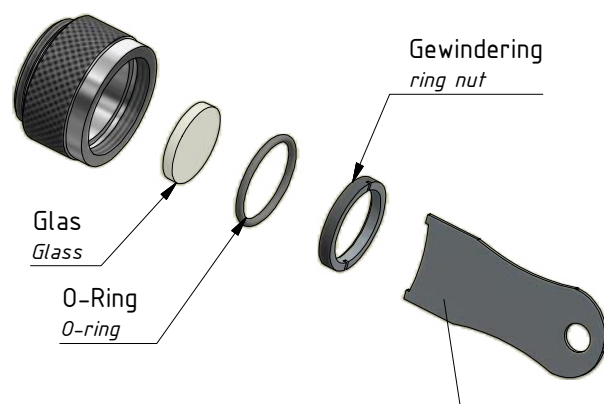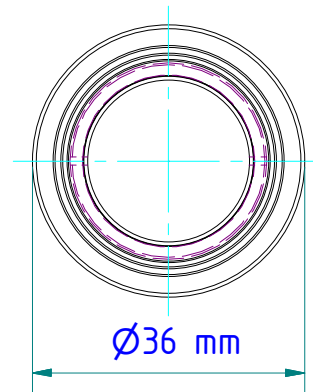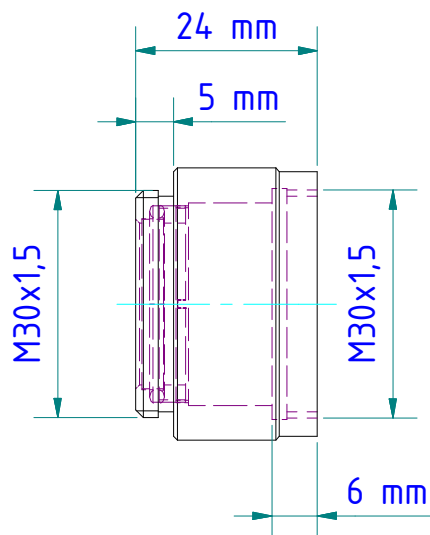

Beim wechseln der Scheibe Schutzbrille und Handschuhe tragen !

Wear protective glasses and gloves when changing the glass.





Nicht bestimmungsgemäßer Gebrauch sowie Änderungen oder Umbau dieses Produktes können zu Verletzungen und zu Schäden am Produkt führen und sind aus Sicherheits-Zulassungsgründen (CE) nicht gestattet.

Improper use or changes or conversion of this Product can cause injury and damage to the product lead and are not permitted for safety certification (CE).

Befestigungswinkel PA 11/U
 Mounting bracket PA 11/U
 nr./no. 1009679

Pyrometer PA

2x Zylinderschraube
 Cylinder head screw
 2x U-Scheibe
 Disc

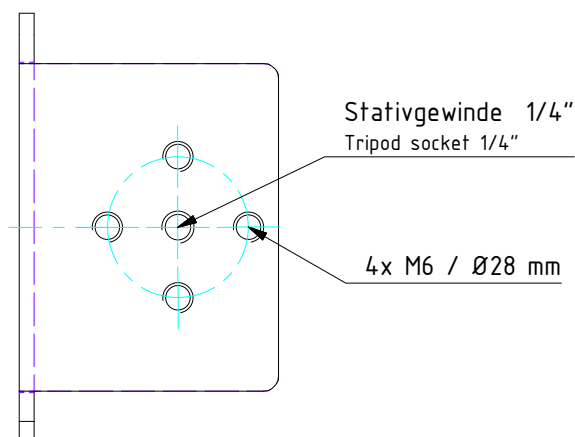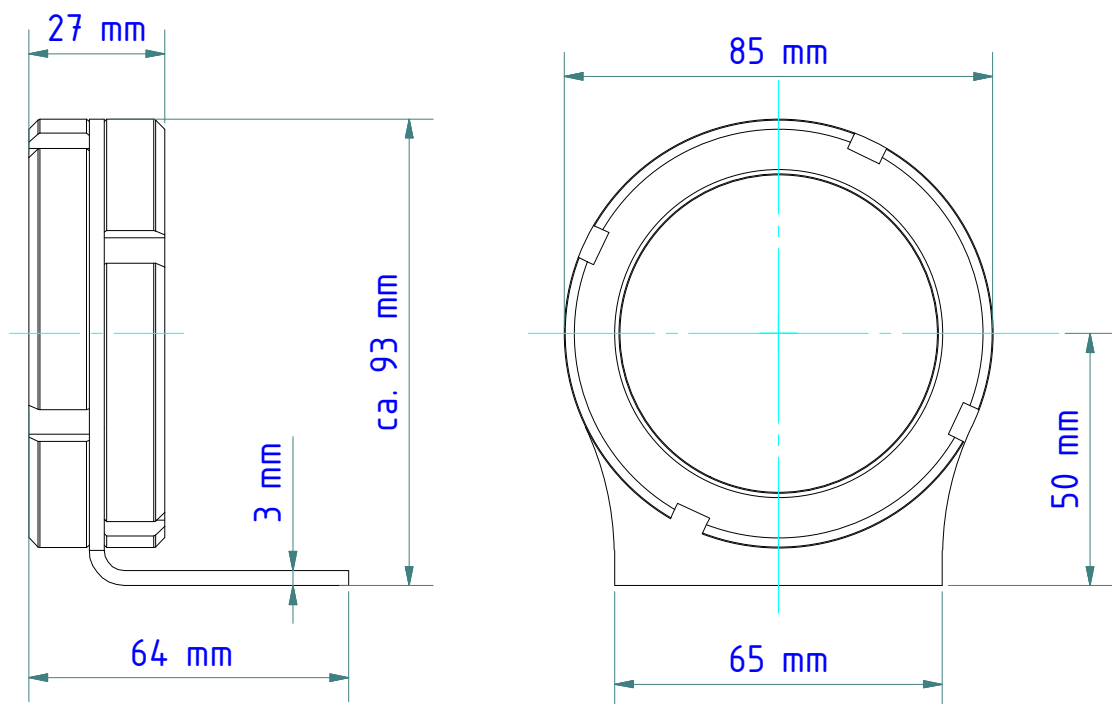


Gewicht: 0.566 Kg

Weight: 0.566 Kg

Werkstoff: 1.4301 / 1.5217

Material: 1.4301 / 1.5217



Seite 1 von 1
 Page 1 of 1

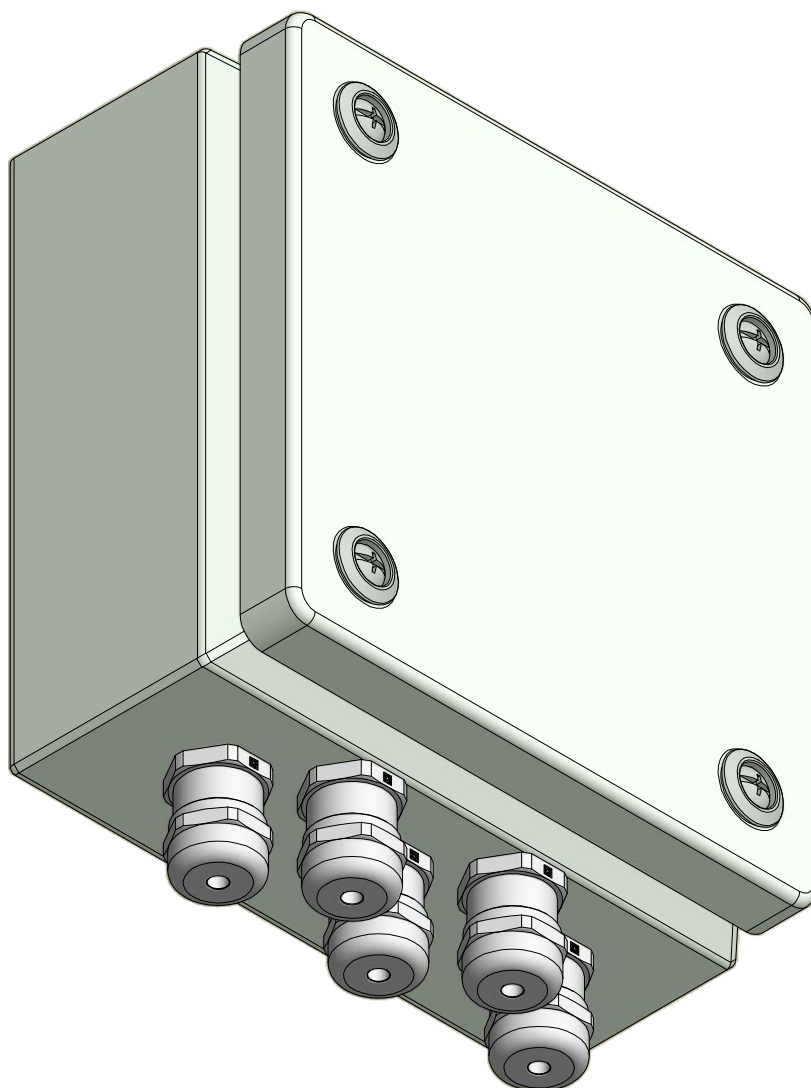

Zubehör:

accessorie:

1x

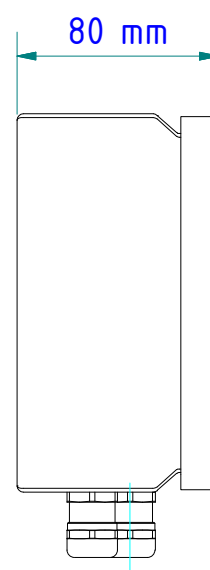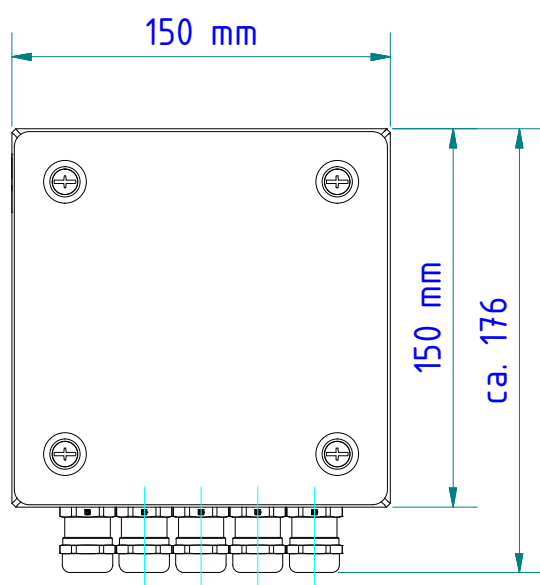


Gewicht: 1.592 Kg
Weight: 1.592 Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi