


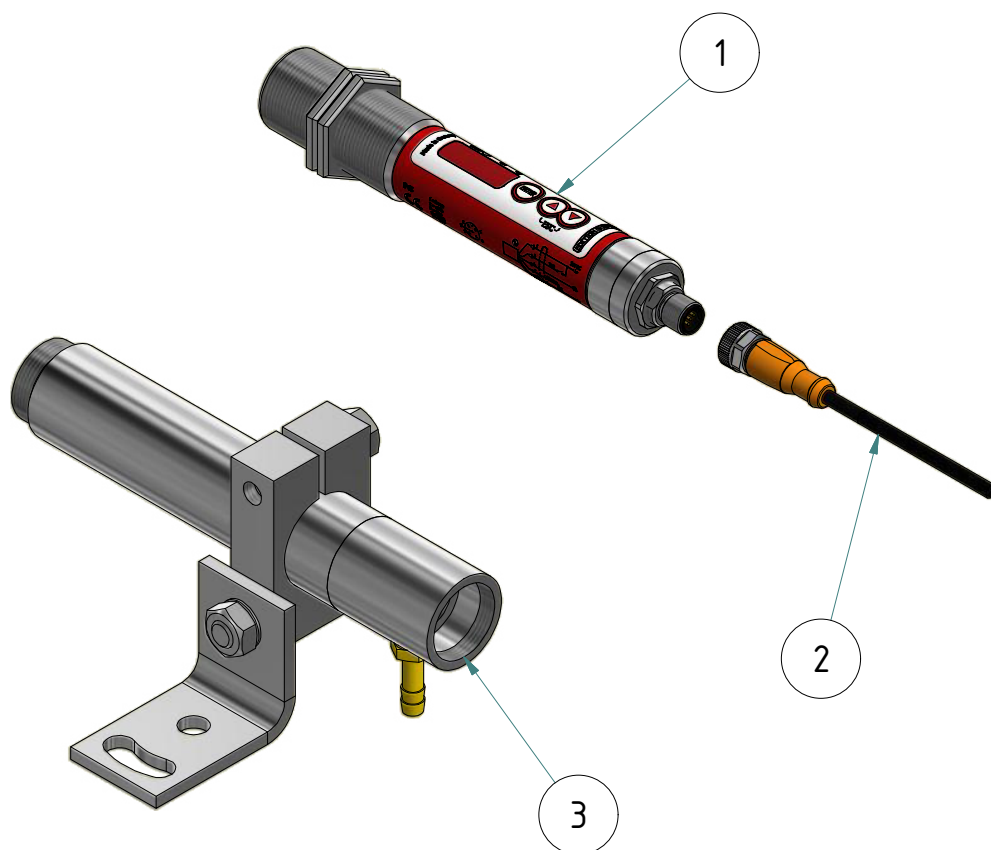


Stückliste / Parts list

Pos.	Artikel-Nr.: <i>order number</i>	Bezeichnung <i>title</i>
1	1083336	Pyrometer CellaTemp PK 11 AF 2/I0 <i>Pyrometer CellaTemp PK 11 AF 2/I0</i>
2	10043813	Kabel VK 02/L AF 1 <i>Cable VK 02/L AF 1</i>
3	1064571	Montagekombination PK 01-007 <i>Mounting PK 01-007</i>



Gewicht: 1.750 Kg
Weight: 1.750 Kg

Seite 1 von 1
Page 1 of 1

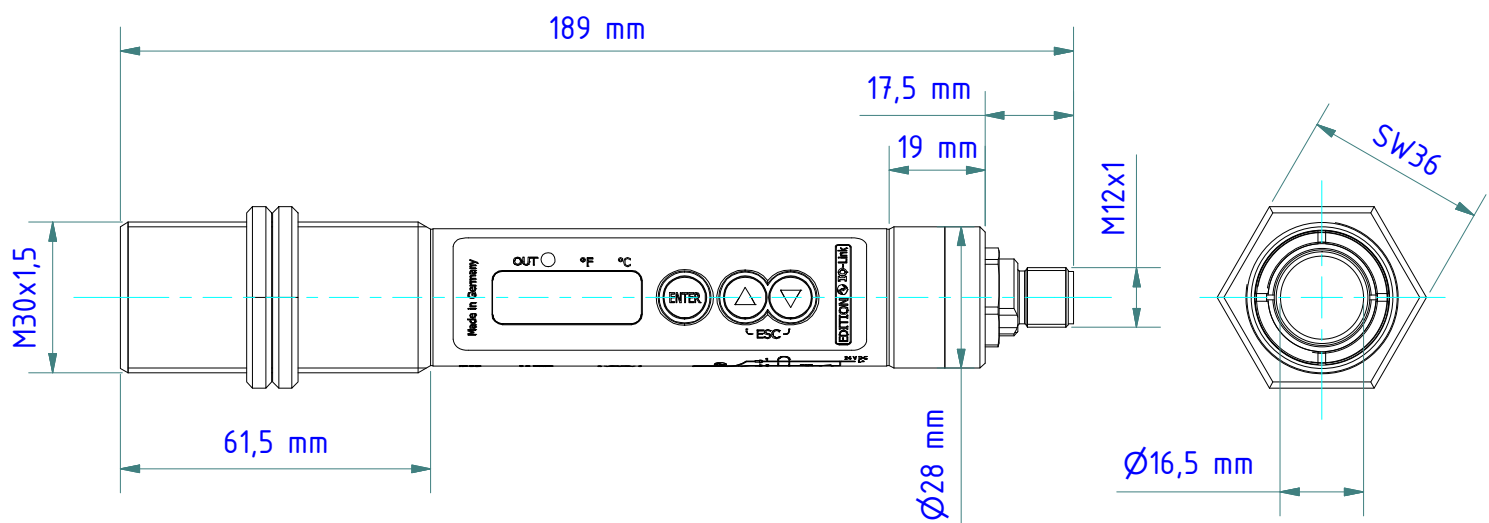


Gewicht: 0.320 Kg
Weight: 0.320 Kg

Seite 1 von 2
Page 1 of 2

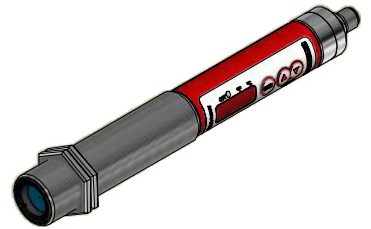


Zubehör: Equipment:





VK 02/L AF1 (5m)
nr./no.: 1043813

VK 02/L AF2 (10m)
nr./no.: 1048085

VK 02/L AF3 (25m)
nr./no.: 1082724




VK 02/R AF1 (5m)
nr./no.: 1069551



VK 03/A AF1 (5m)
nr./no.: 1086480


VK 03/A AF2 (10m)
nr./no.: 1086481

VK 03/R AF3 (20m)
nr./no.: 1086483

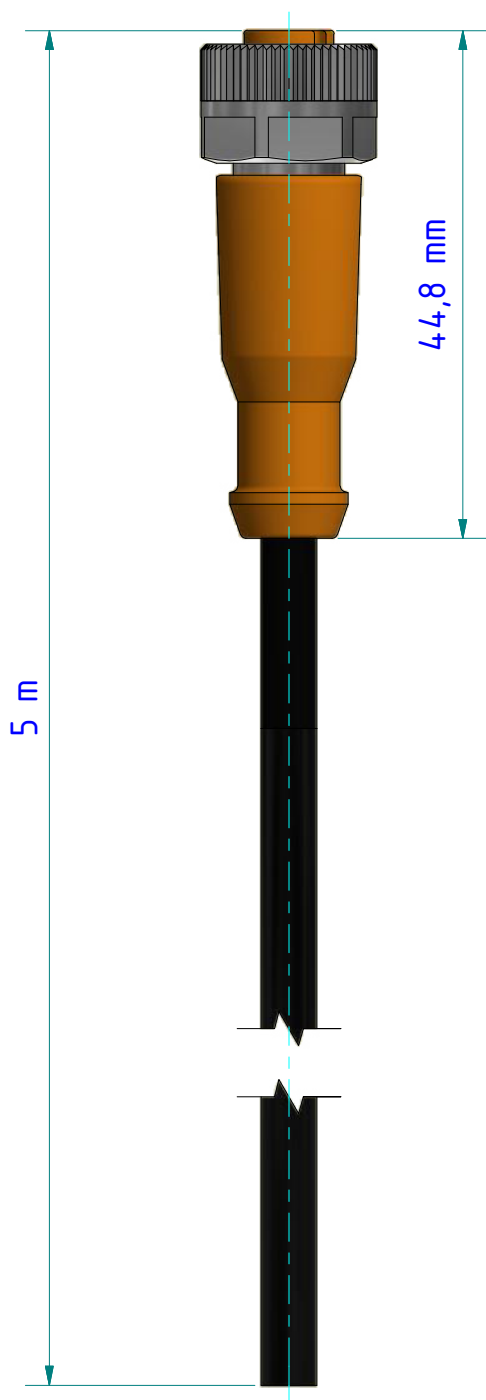

Belegung Configuration	Pol contacts
---------------------------	-----------------

braun	an 1
brown	at 1
weiß	an 2
white	at 2
blau	an 3
blue	at 3
schwarz	an 4
black	at 4
grau	an 5
grey	at 5
Schirm durchgängig an Verschraubung	
Shield constantly at screw connection	

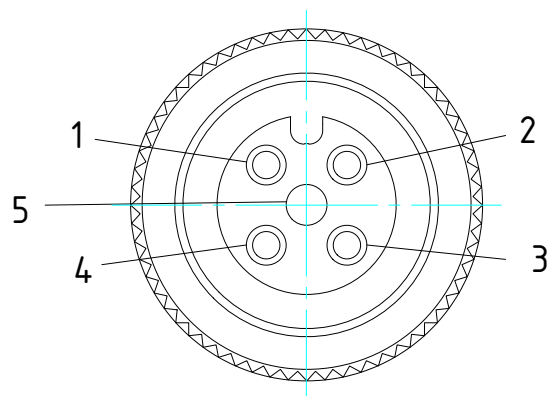

(Maßstab 3:1)

PUR-Kabel / PUR cable

Umgebungstemperatur [°C] / Ambient temperature -25...90, cULus: max. 75 °C

Schutzart / Protection IP 65 / IP 67

Gewicht: 0.220 Kg


Weight: 0.220 Kg

Seite 1 von 1

Page 1 of 1

This technical drawing illustrates a mechanical assembly. A horizontal shaft is shown with a threaded section on the left. A bracket is mounted on the shaft, and a base plate is attached to the bracket. The base plate features a circular hole and a larger, irregularly shaped cutout. A nut and washer are shown being tightened onto the bracket. Two leader lines point to the shaft and the base plate.


A red and silver electronic device, likely a laser level, with a digital display and control buttons. The device is cylindrical and has a red body with silver-colored metal components at the ends. It features a small LCD screen and several buttons, including a power button and a button with a right-pointing arrow. A laser beam is shown emanating from the front.

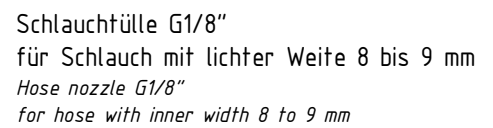

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi