



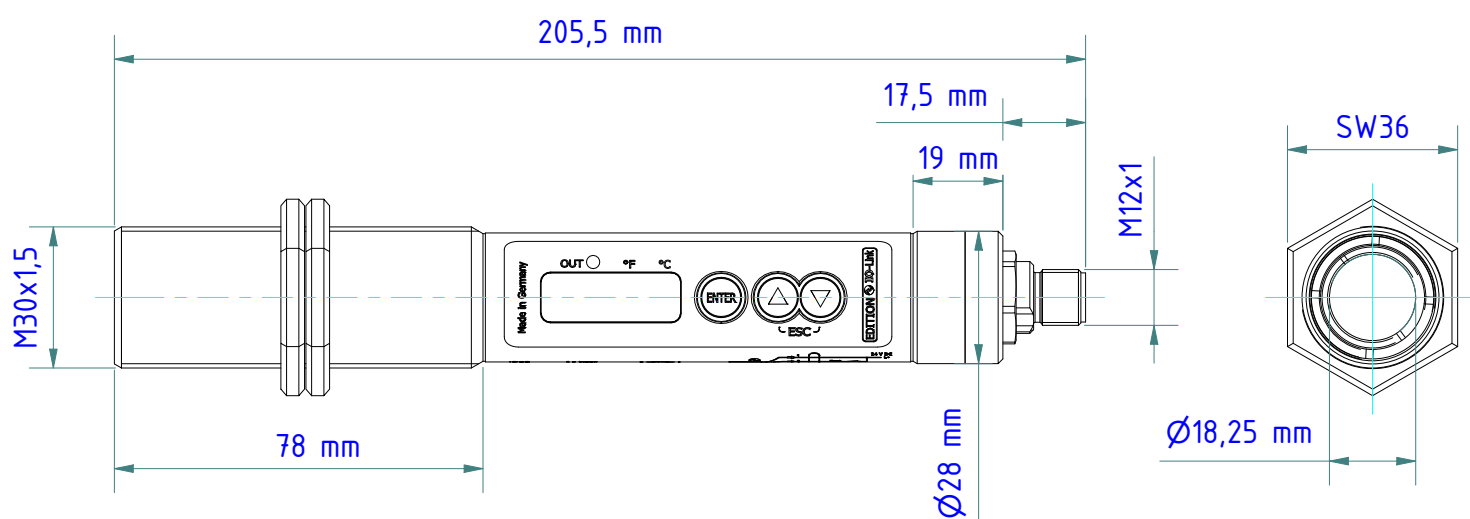

Gewicht: 0.340 Kg  
Weight: 0.340 Kg


Seite 1 von 2  
Page 1 of 2

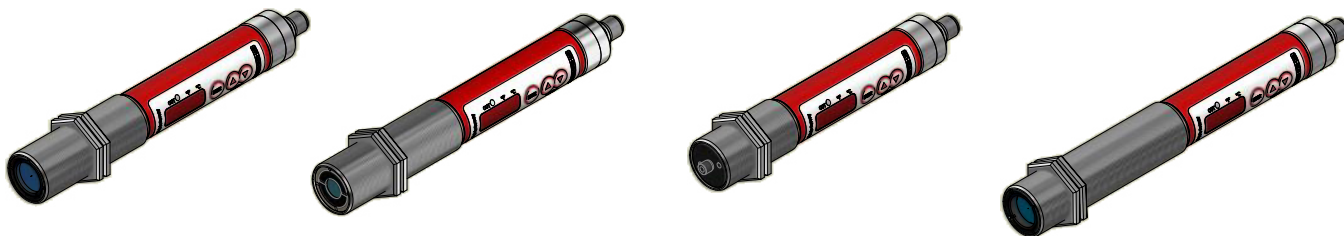

VK 02/L AF1 ( 5m )  
nr./no.: 1043813




VK 02/L AF2 ( 10m )  
nr./no.: 1048085



VK 02/L AF3 ( 25m )  
nr./no.: 1082724





VK 02/R AF1 ( 5m )  
nr./no.: 1069551



VK 03/A AF1 ( 5m )  
nr./no.: 1086480



VK 03/A AF2 ( 10m )  
nr./no.: 1086481



VK 03/R AF3 ( 20m )  
nr./no.: 1086483

Flansch DN50 G1.1/4"

Flange DN50 G1.1/4"

nr. / no.: 515087

Axialluftdüse PS 01/A AF2

Air purge PS 01/A AF2

nr./no. 561553

Saphir-Scheibenvorsatz PS 15/I AF1

Sapphire window PS 15/I AF1

nr./no. 1023960

eingebaut / inside

Kühlarmatur geschlossen PK 01/C AF1

Cooling jacket, sealed PK 01/C AF1

nr./no. 1075773

Doppelnippel konisch R1 1/4"


Double nipple 1.25 inch

nr. / no.: 120865

Bajonettverschluss PS 11/N AF4

Bayonet coupling PS 11/N AF4

nr./no. 561585

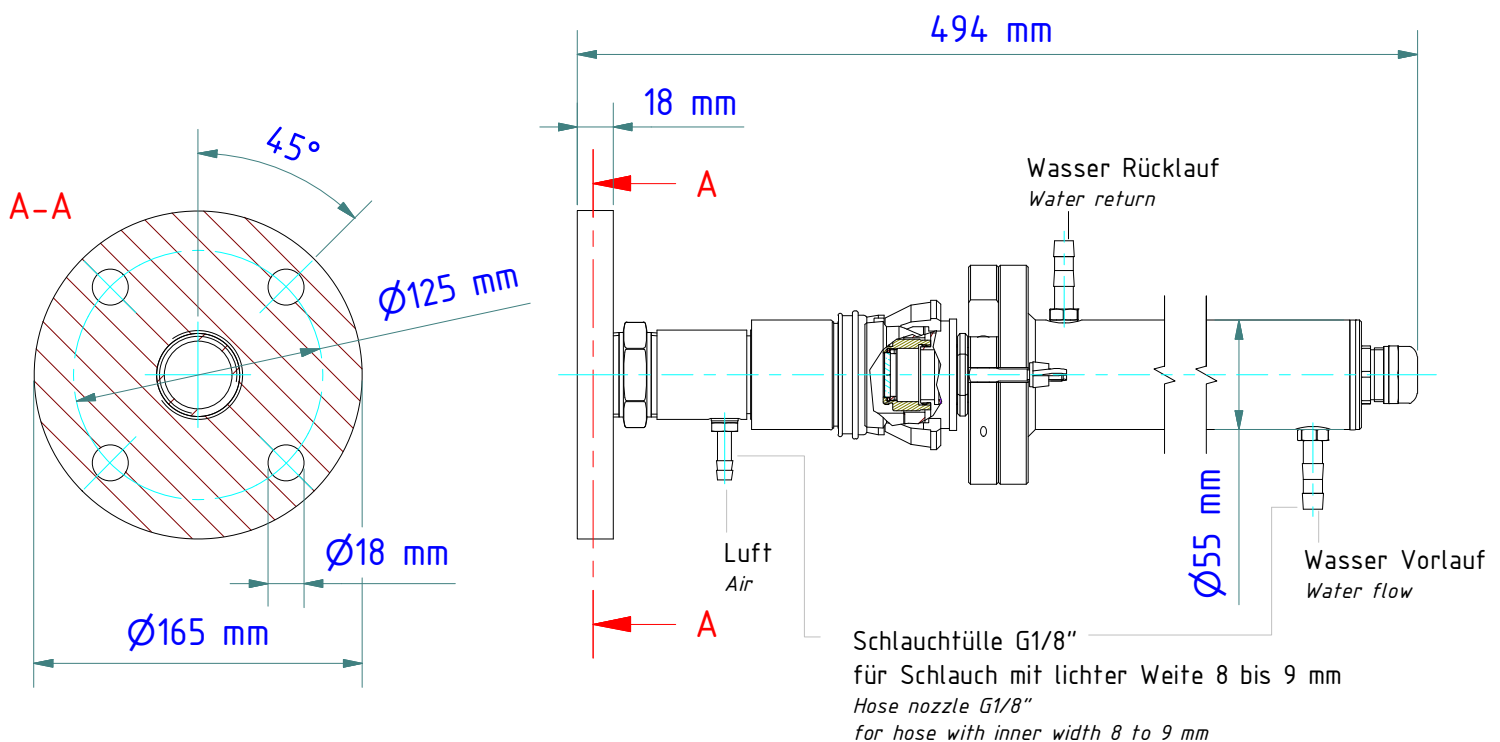


Gewicht: 8.020 Kg

Weight: 8.020 Kg

Seite 1 von 1


Page 1 of 1

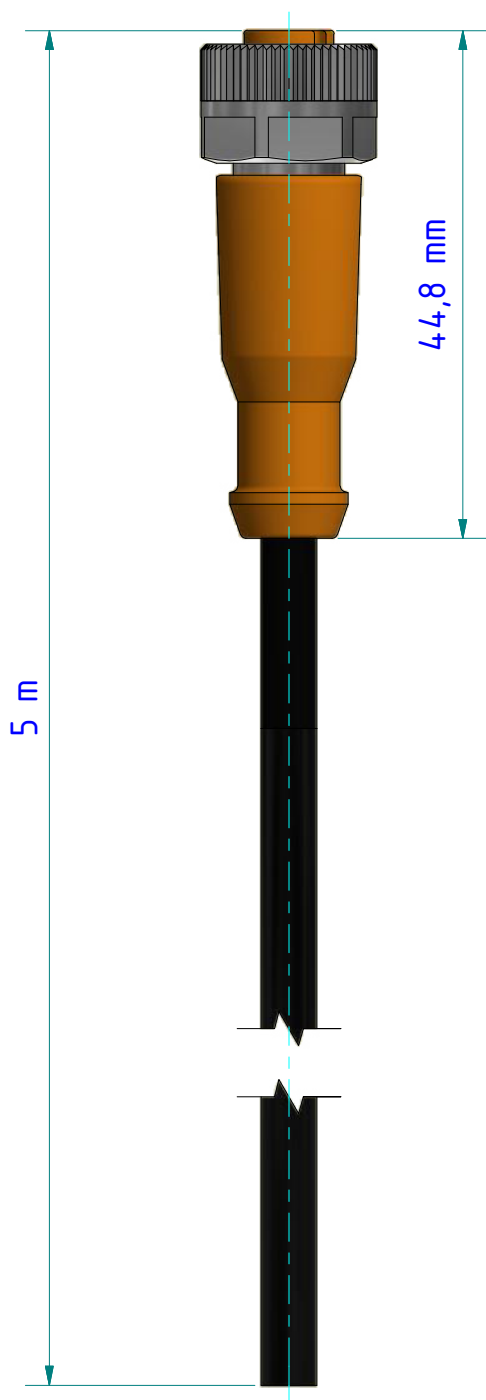

*Belegung*  
*Configuration*

*Pol*  
*contacts*

|                                       |      |
|---------------------------------------|------|
| braun                                 | an 1 |
| brown                                 | at 1 |
| weiß                                  | an 2 |
| white                                 | at 2 |
| blau                                  | an 3 |
| blue                                  | at 3 |
| schwarz                               | an 4 |
| black                                 | at 4 |
| grau                                  | an 5 |
| grey                                  | at 5 |
| Schirm durchgängig an Verschraubung   |      |
| Shield constantly at screw connection |      |

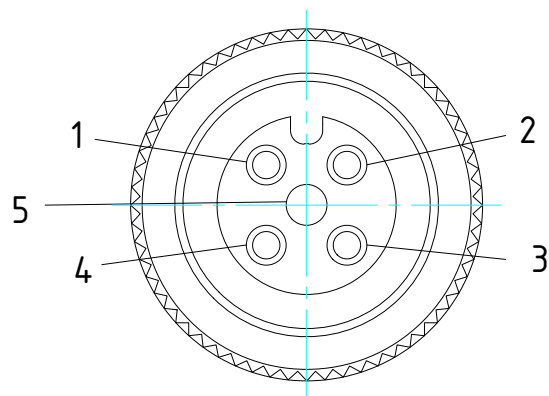

( Maßstab 3:1 )

PUR-Kabel / *PUR cable*

Umgebungstemperatur [°C] / *Ambient temperature* -25...90, cULus: max. 75 °C


Schutzart / *Protection* IP 65 / IP 67

Gewicht: 0.220 Kg  
*Weight:* 0.220 Kg

Seite 1 von 1  
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH  
Infrared Temperature Solutions (ITS)  
Carl-Keller-Straße 2-10  
49479 Ibbenbüren-Laggenbeck  
Germany

[www.keller.de/its](http://www.keller.de/its)  
Tel. +49 (0) 5451 850  
Fax +49 (0) 5451 85412  
[its@keller.de](mailto:its@keller.de)

## Distributor



INOR Transmitter Oy  
Unikkotie 13  
FI-01300 Vantaa  
Puhelin +358 10 4217900  
Faksi +358 10 4217901  
[myynti@inor.fi](mailto:myynti@inor.fi)