
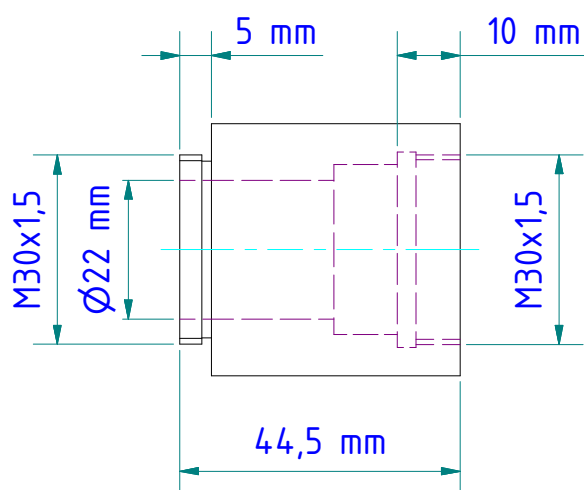


Temperaturbeständigkeit,  
Dauergebrauchstemperatur  
-40°C bis +100°C  
kurzzeitig +140°C

Temperature stability,  
Continuous operating temperature  
-40°C to +100°C  
short-time +140°C

Seite 1 von 1  
Page 1 of 1

Gewicht: 0.044 Kg  
Weight: 0.044 Kg  
Werkstoff: POM  
Material: POM

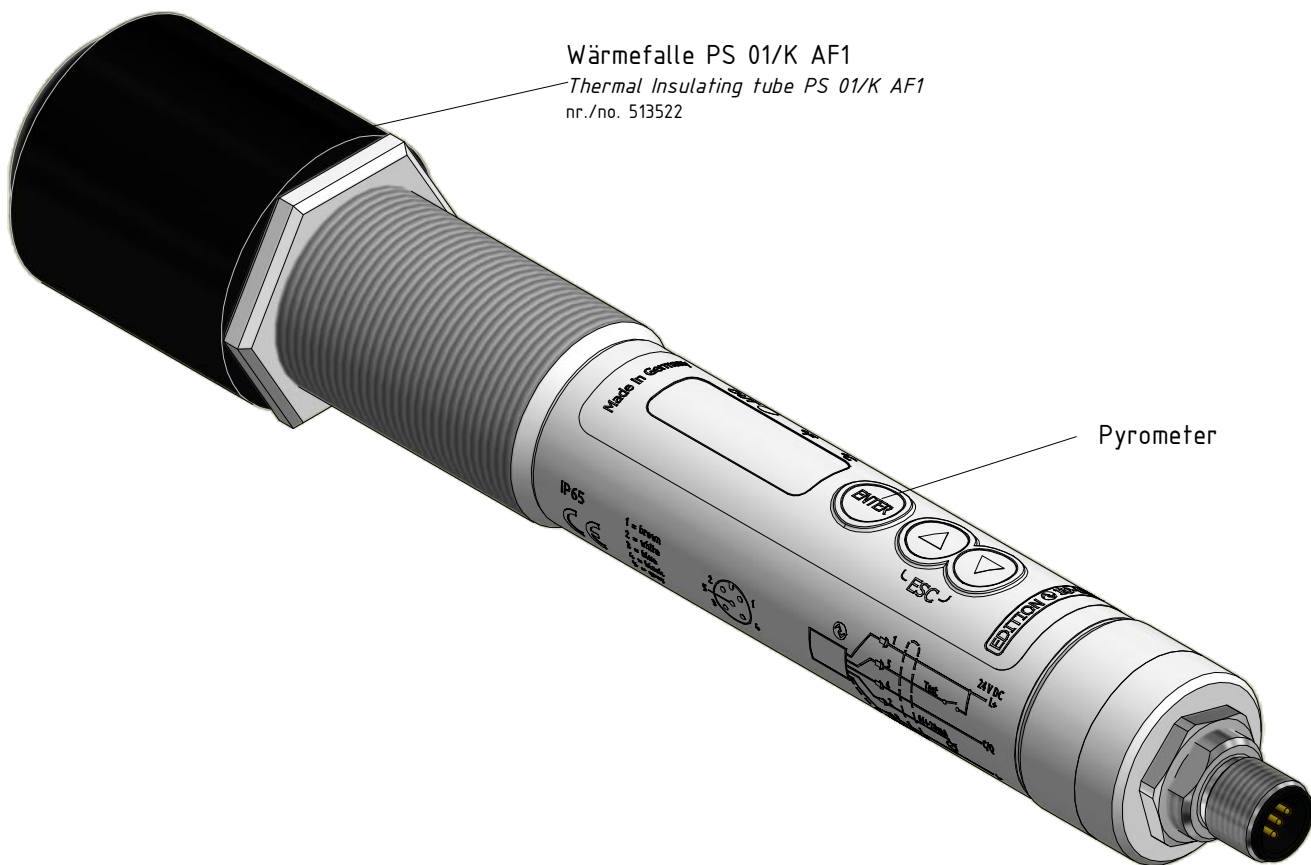

- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH  
Infrared Temperature Solutions (ITS)  
Carl-Keller-Straße 2-10  
49479 Ibbenbüren-Laggenbeck  
Germany

[www.keller.de/its](http://www.keller.de/its)  
Tel. +49 (0) 5451 850  
Fax +49 (0) 5451 85412  
[its@keller.de](mailto:its@keller.de)

## Distributor



INOR Transmitter Oy  
Unikkotie 13  
FI-01300 Vantaa  
Puhelin +358 10 4217900  
Faksi +358 10 4217901  
[myynti@inor.fi](mailto:myynti@inor.fi)