


Belegung Configuration	Pol contacts
rosa <i>pink</i>	an A <i>at A</i>
weiß <i>white</i>	an B <i>at B</i>
grau <i>grey</i>	an C <i>at C</i>
gelb <i>yellow</i>	an D <i>at D</i>
violett <i>violet</i>	an E <i>at E</i>
braun <i>brown</i>	an F <i>at F</i>
grün <i>green</i>	an G <i>at G</i>
rot-blau <i>red-blue</i>	an H <i>at H</i>
rot <i>red</i>	an J <i>at J</i>
grau-rosa <i>grey-pink</i>	an K <i>at K</i>
blau <i>blue</i>	an L <i>at L</i>
schwarz <i>black</i>	an M <i>at M</i>

*Schirm durchgängig an Verschraubung*  
*Shield constantly at screw connection*

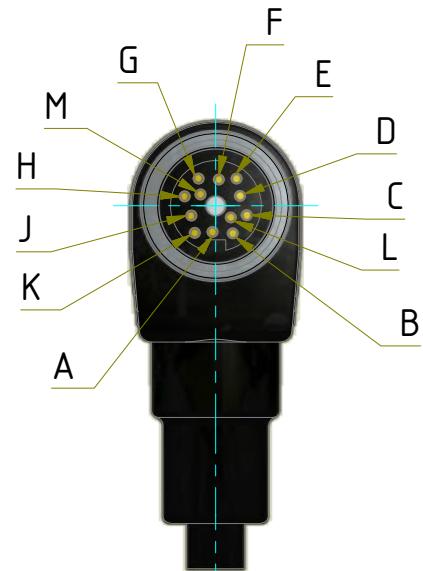

Anschlussquerschnitt 0,25mm<sup>2</sup> (AWG 24)  
Schutzart IP67 geschirmt  
Obere Grenztemperatur + 70°C  
Untere Grenztemperatur - 25°C

Wire gauge 0,25mm<sup>2</sup> (AWG 24)  
Degree of protection IP67 shielded  
Upper temperature + 70°C  
Lower temperature - 25°C

Gewicht: 0.230 Kg  
Weight: 0.230 Kg

Seite 1 von 1  
Page 1 of 1